


LWBA-175 Series





Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 C ~ +65 C
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

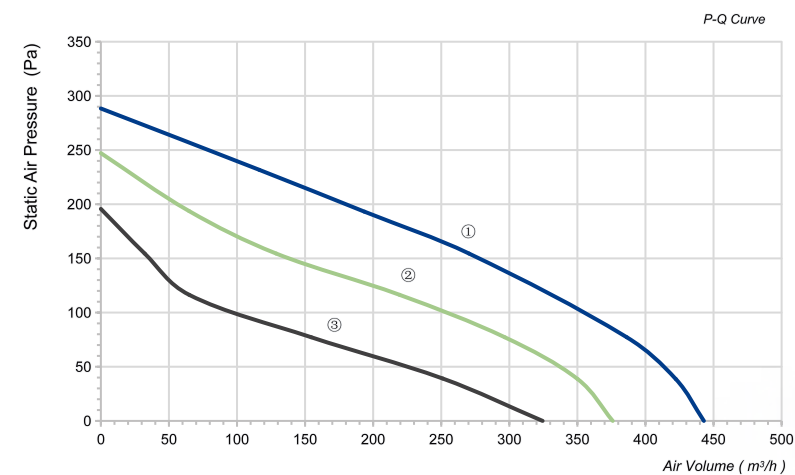


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E175-092NS-05	230	50	52	0.25	2530	443	288	64	1.5uF	①
			45	0.2	2150	376	247	60	1.5uF	②
			42	0.18	1850	324	196	55	1.5uF	③

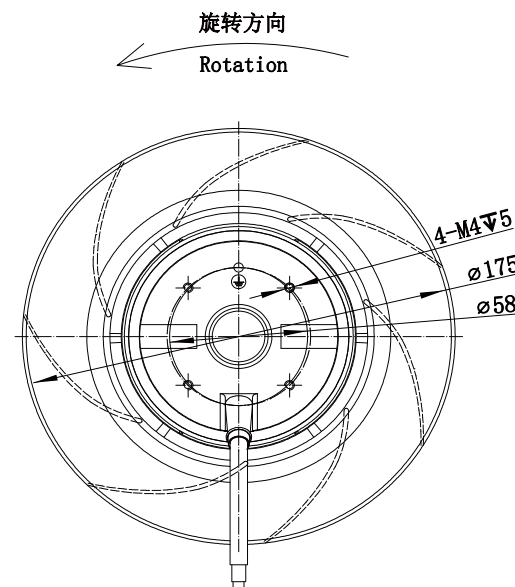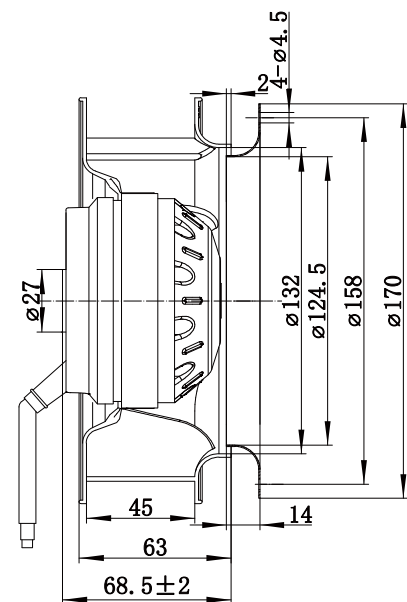

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBA-180 Series

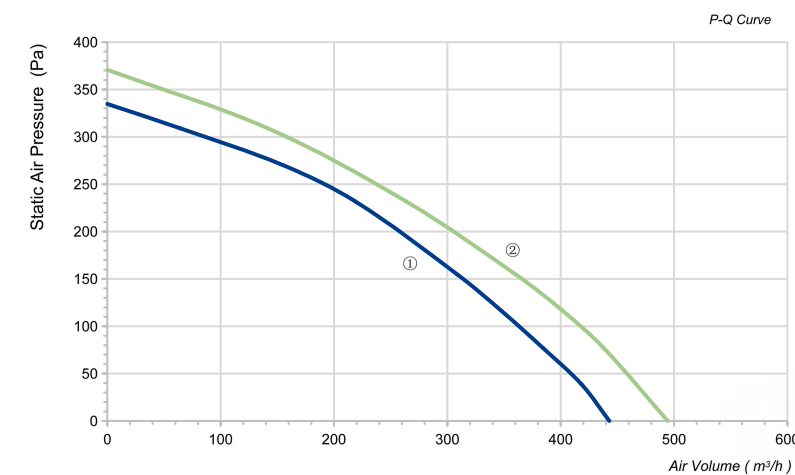



Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 C ~ +65 C
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E180-092NS-01	230	50	52	0.24	2550	443	335	63	1.5uF	①
LWBA2E180-092NS-02	230	60	66	0.32	2850	494	371	66	1.5uF	②

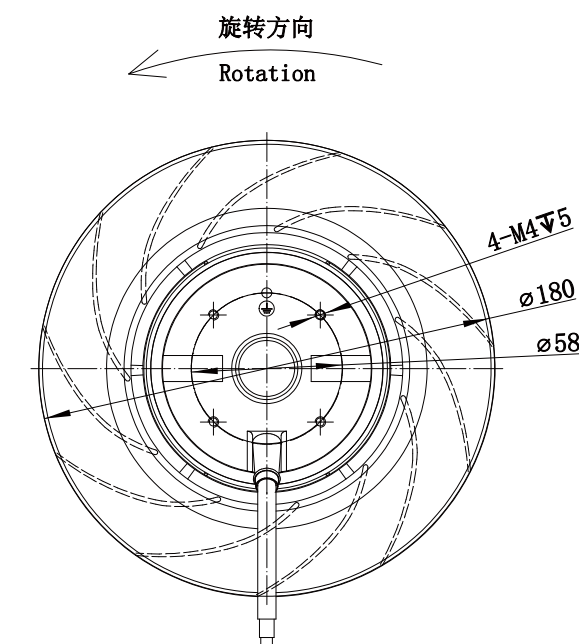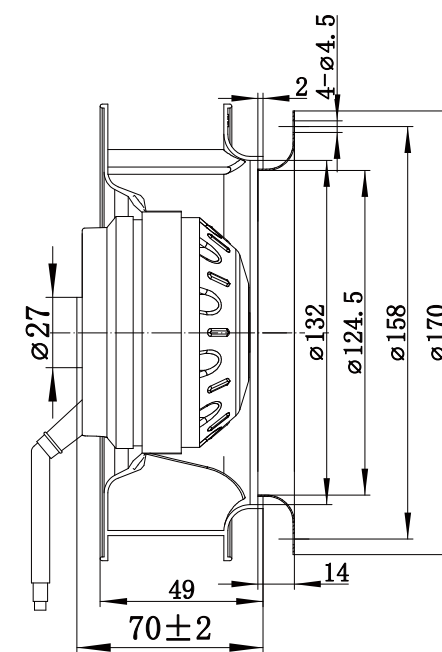

zakaz@ventilatorry.ru +7 (495) 133-95-09