


LWBA-190 Series

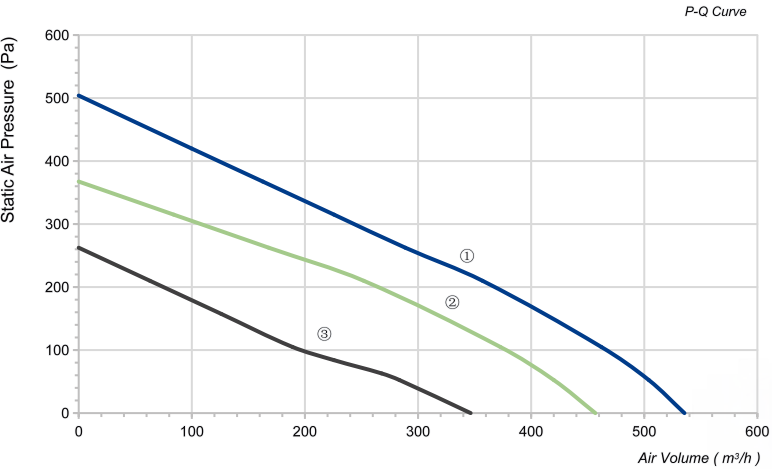


Product Characteristic

- Impeller Material: Plastic PA66
 - Direction of Rotation: Clockwise, seen on rotor
 - Mode of Operation: S1
 - Operation Temperature: -40 C ~ +65 C
 - Type of Protection: IP44
 - Insulation Class: F
 - Bearing: Maintenance-free ball bearings
- CE RoHS BSCI ISO ENEC LVD


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E190-092NU-02	115	60	70	0.31	3080	536	504	68.5	8uF	①
LWBA2E190-092NS-03	230	50	60	0.27	2700	457	368	65.2	2.5uF	②
LWBA4E190-092NS-04	230	50	30	0.14	2100	347	263	58.2	1.5uF	③

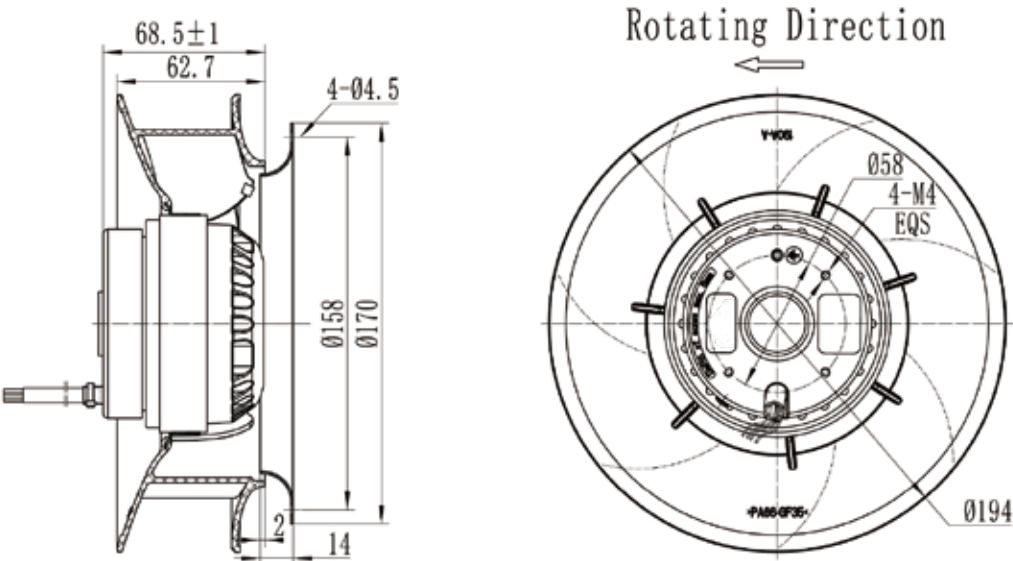

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBA-190 Series

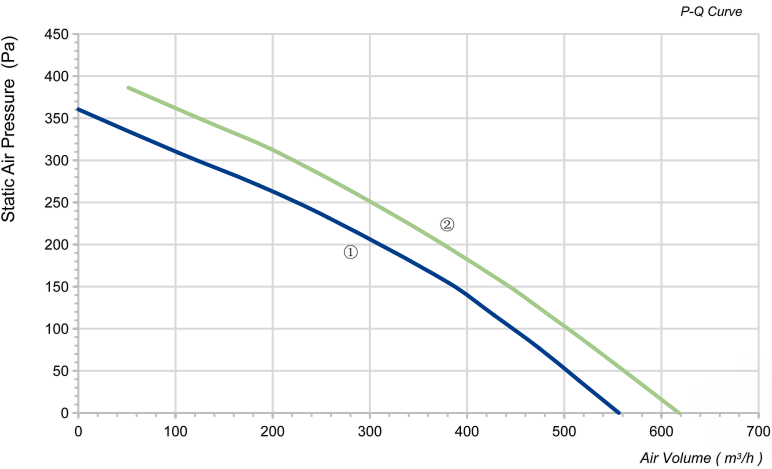


Product Characteristic

- Impeller Material: Plastic PA66
 - Direction of Rotation: Clockwise, seen on rotor
 - Mode of Operation: S1
 - Operation Temperature: -40 C ~ +65 C
 - Type of Protection: IP44
 - Insulation Class: F
 - Bearing: Maintenance-free ball bearings
- CE RoHS BSCI ISO ENEC LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4E190-092NS-05	230	50	60	0.27	2500	556	361	65	2uF	①
LWBA4E190-092NS-06	230	60	76	0.35	2700	618	386	68	2uF	②

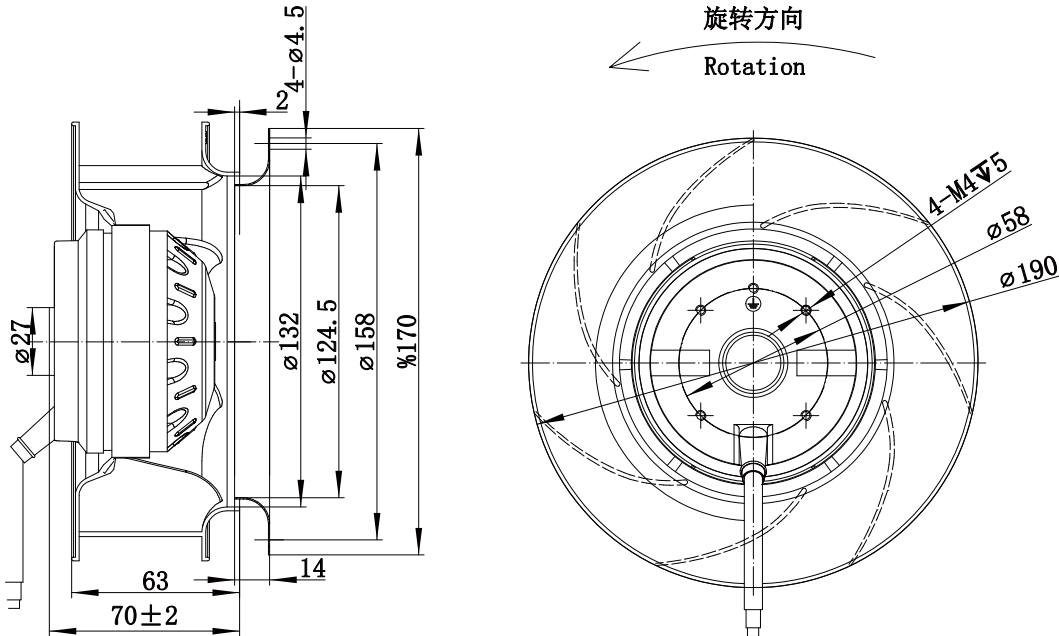

zakaz@ventilatorry.ru +7 (495) 133-95-09