


LWBA-220 Series




Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 C ~ +65 C
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

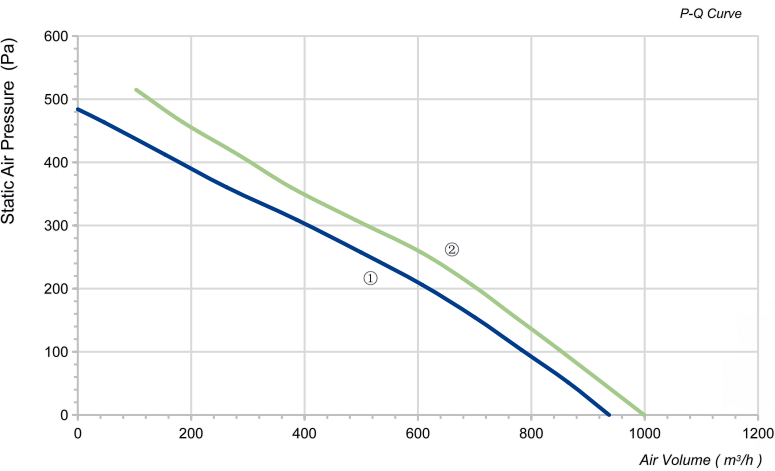


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E220-092NS-04	230	50	90	0.41	2500	937	484	70	2.5uF	①
LWBA2E220-092NS-05	230	60	100	0.46	2700	999	515	73	2.5uF	②
LWBA2D220-092NT-06	380	50	85	0.17	2500	937	484	70	/	①
LWBA2D220-092NT-07	380	60	100	0.2	2700	999	515	73	/	②

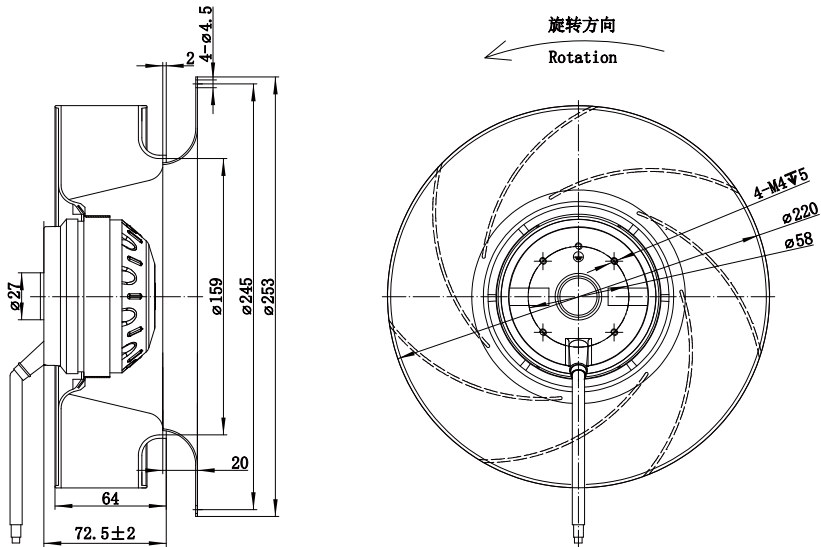

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBA-220 Series

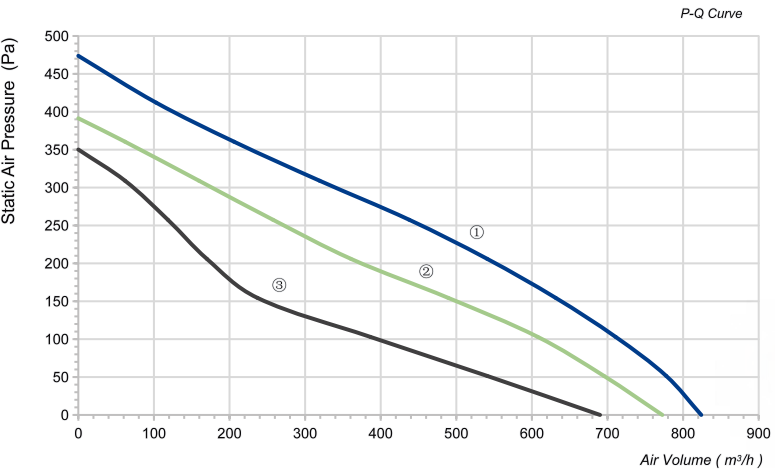


Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 C ~ +65 C
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E220-092NS-08	230	50	95	0.44	2500	824	474	70	2.5uF	①
			90	0.4	2300	773	391	67	2.5uF	②
			88	0.4	2000	690	350	64	2.5uF	③

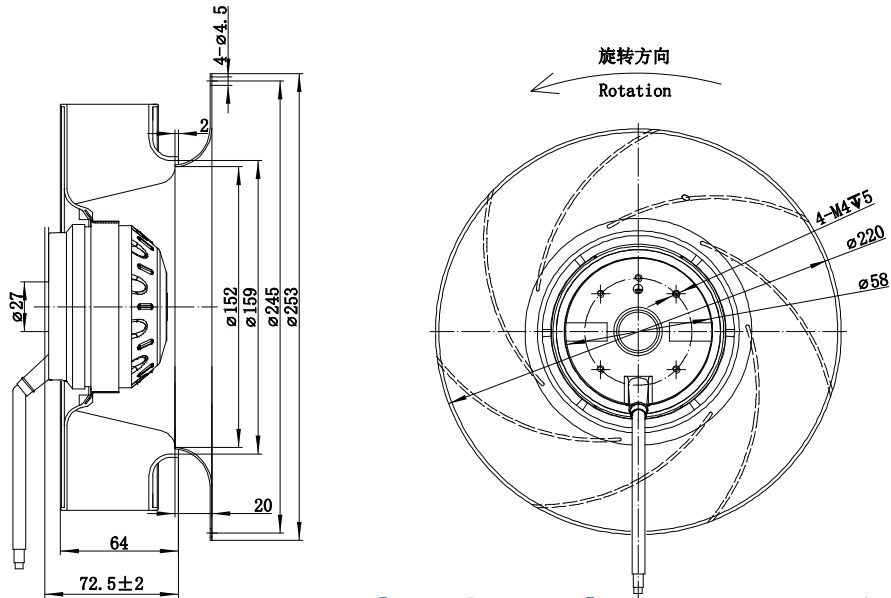

zakaz@ventilatorry.ru +7 (495) 133-95-09