


LWBA-225 Series




Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 C ~ +65 C
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

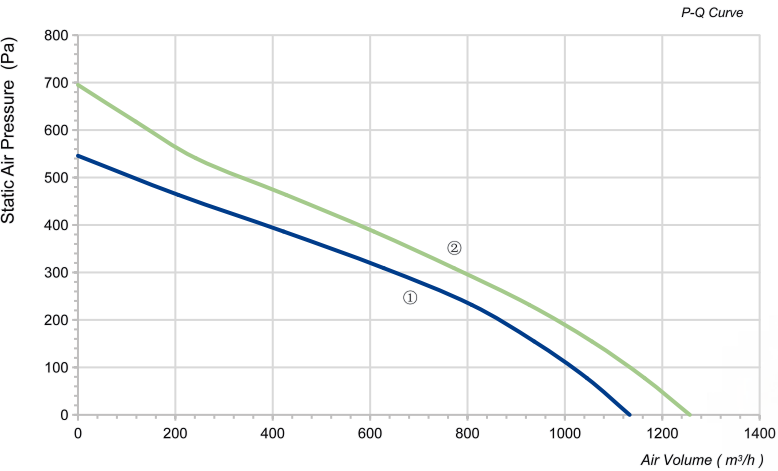


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E225-092NS-09	230	50	135	0.6	2600	1133	546	74	4uF	①
LWBA2E225-092NS-10	230	60	180	0.9	2900	1257	695	76	4uF	②
LWBA2D225-092NT-11	380	50	135	0.23	2600	1133	546	74	/	①
LWBA2D225-092NT-12	380	60	180	0.28	2900	1257	695	76	/	②

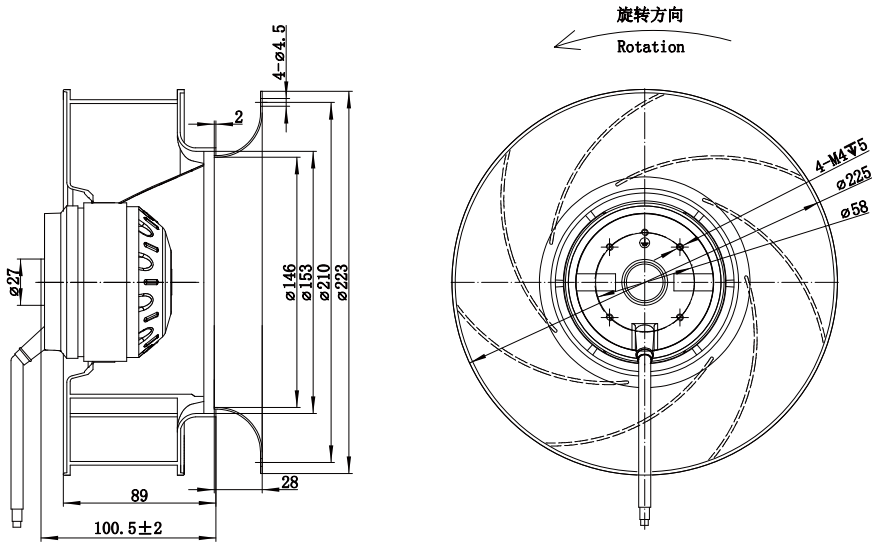

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBA-225 Series

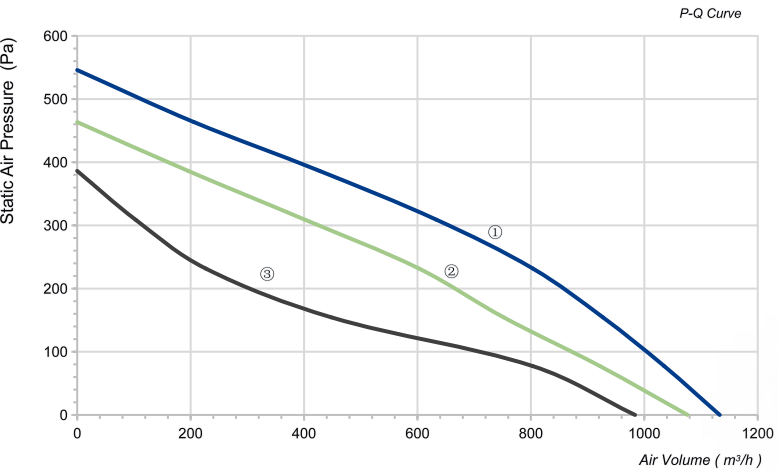


Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 C ~ +65 C
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E225-092NS-13	230	50	125	0.6	2630	1133	546	74	4uF	①
			120	0.54	2500	1076	464	70	4uF	②
			115	0.52	2290	984	386	66	4uF	③

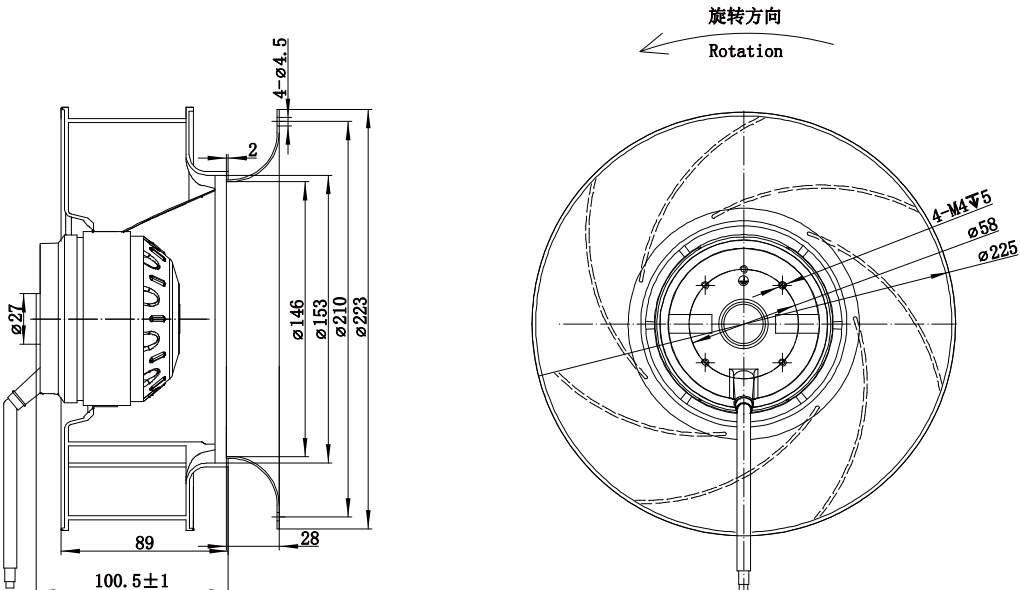

zakaz@ventilatorry.ru +7 (495) 133-95-09