


LWBA-250 Series





Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 C ~ +65 C
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

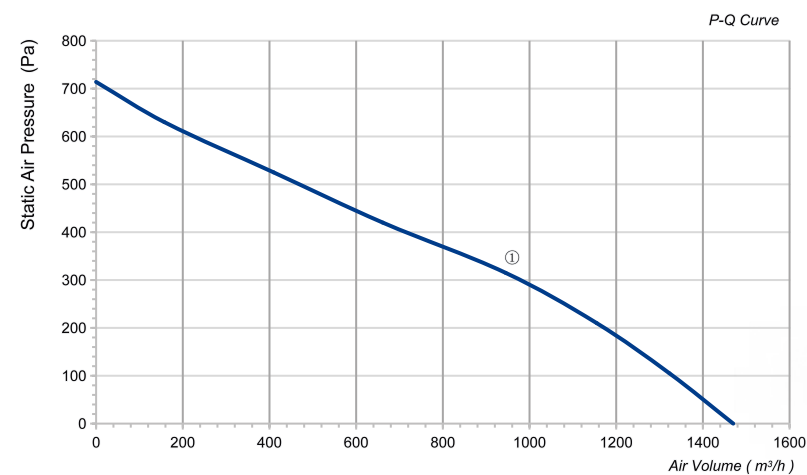


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E250-092NS-07	230	50	151	0.66	2700	1470	714	72.7	5uF	①

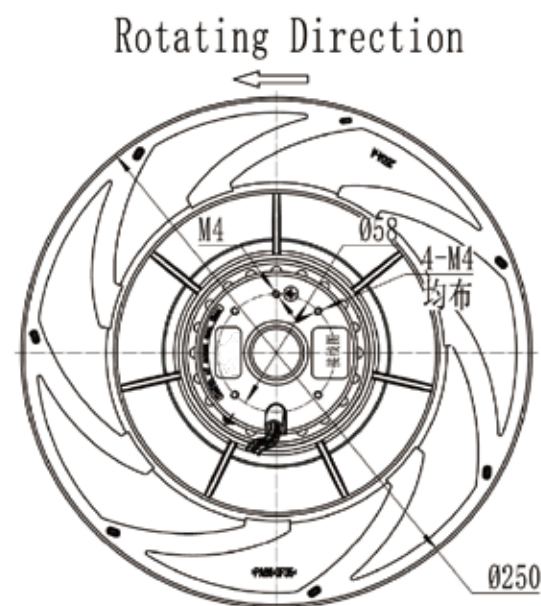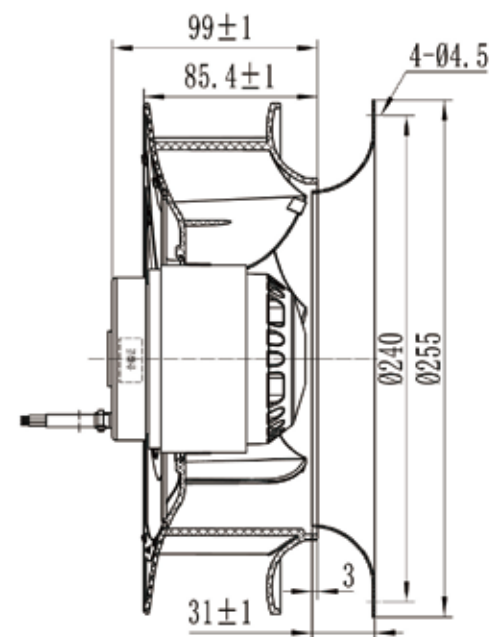

LWBA-250 Series

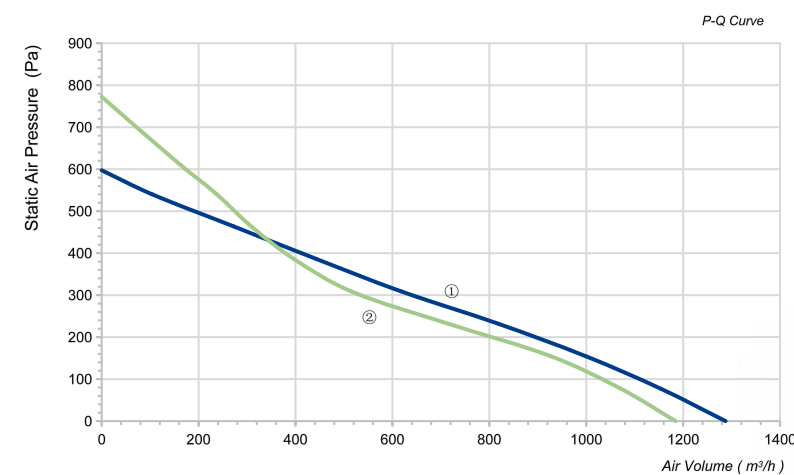

Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 C ~ +65 C
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E250-092NS-08	230	50	135	0.6	2450	1288	597	74	4uF	①
LWBA2E250-092NS-09	230	60	190	0.9	2600	1185	773	76	4uF	②
LWBA2D250-092NT-10	380	50	160	0.32	2450	1288	597	74	/	①
LWBA2D250-092NT-11	380	60	185	0.38	2600	1185	773	76	/	②

