


LWBA-250 Series




Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 C ~ +65 C
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

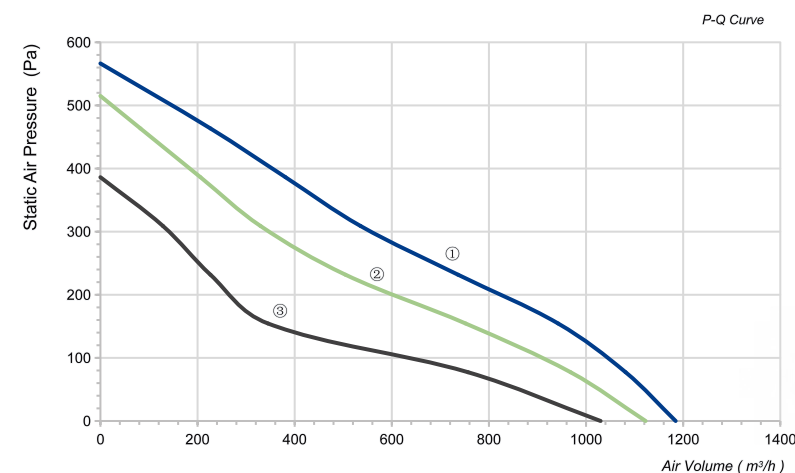


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E250-092NS-12	230	50	130	0.62	2650	1185	567	76	4uF	①
			125	0.58	2400	1123	515	70	4uF	②
			120	0.56	2150	1030	386	65	4uF	③

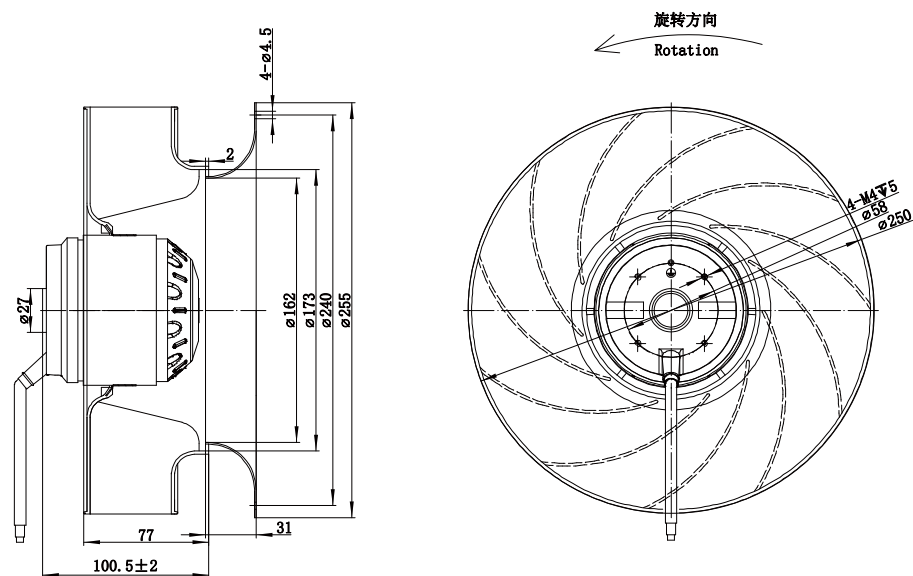

LWBA-250 Series

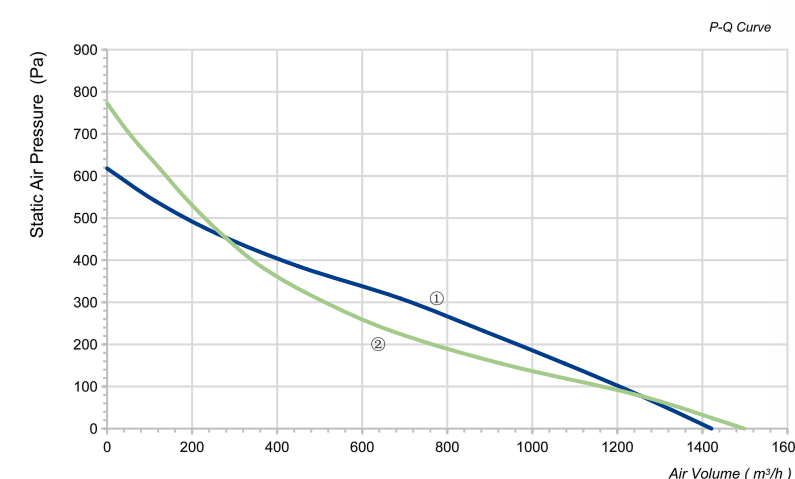

Product Characteristic

- Impeller Material: Galvanised sheet steel
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 C ~ +65 C
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E250-092NS-13	230	50	155	0.7	2500	1421	618	76	4uF	①
LWBA2E250-092NS-14	230	60	210	0.95	2600	1499	773	79	4uF	②
LWBA2D250-092NT-15	380	50	150	0.31	2450	1421	618	76	/	①
LWBA2D250-092NT-16	380	60	200	0.37	2550	1499	773	79	/	②

