
ВЕНТИЛЯТОРЫ.RU
МАГАЗИН ПРОМЫШЛЕННЫХ ВЕНТИЛЯТОРОВ
ventilatorry.ru

LWBA-280 Series



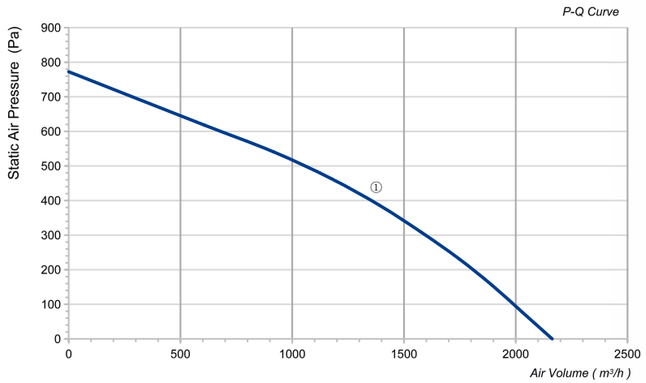


Product Characteristic

- Impeller Material: Galvanised sheet steel
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

CE RoHS ETL BSCI ISO EAC UL LVD

Technical Specifications


Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E280-102NS-07	230	50	330	1.5	2700	2163	773	80	10uF	①
LWBA2D280-102NT-08	380	50	330	0.7	2700	2163	773	80	/	①

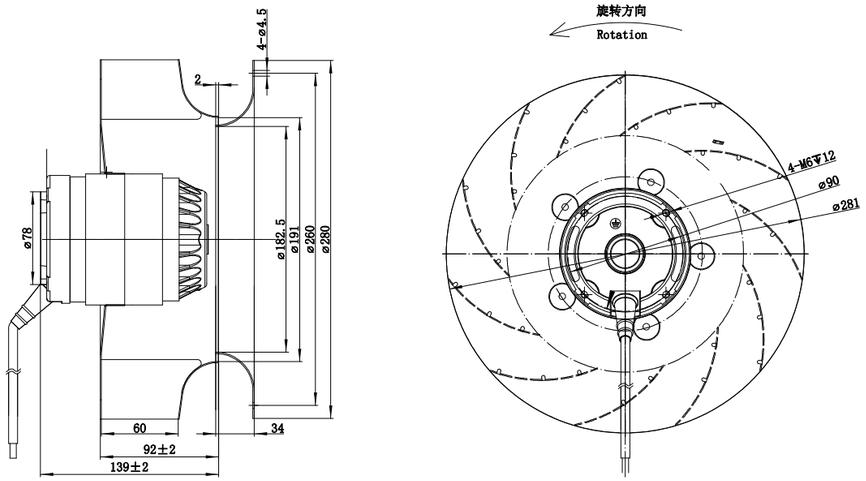

zakaz@ventilatorry.ru +7 (495) 133-95-09

ВЕНТИЛЯТОРЫ.RU
Ningbo Longv
https://www.l
МАГАЗИН ПРОМЫШЛЕННЫХ ВЕНТИЛЯТОРОВ
ventilatorry.ru

LWBA-280 Series

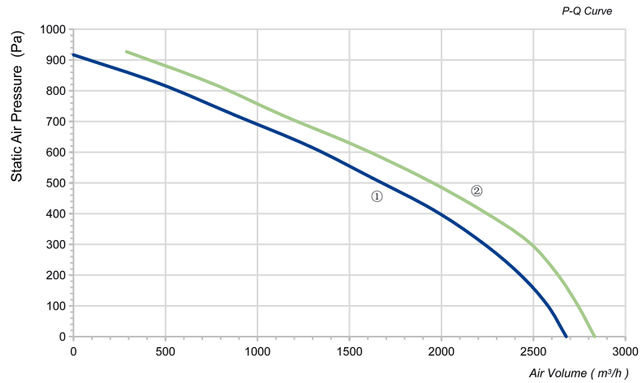




Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

CE RoHS ETL BSCI ISO EAC UL LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2D280-138NT-09	380	50	500	0.95	2750	2678	917	78	/	①
LWBA2D280-138NT-10	380	60	680	1.6	2900	2833	927	80	/	②

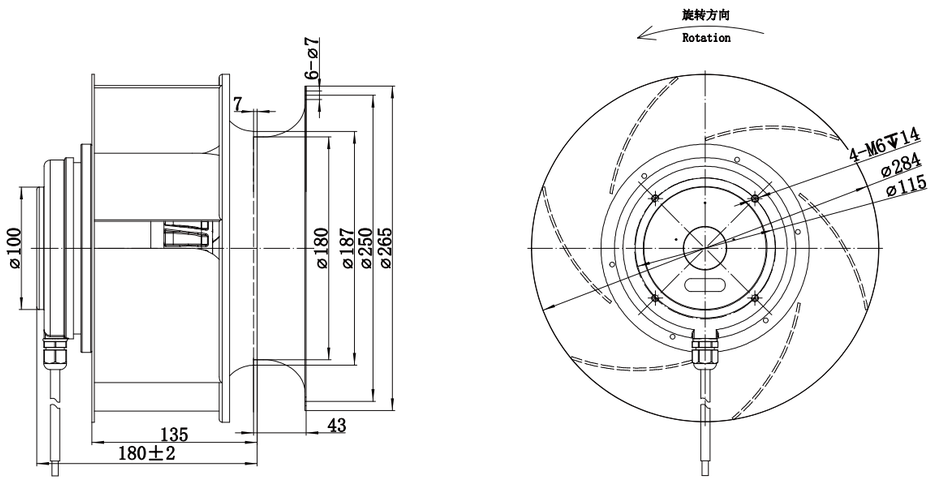

zakaz@ventilatorry.ru +7 (495) 133-95-09