


LWBA-450 Series


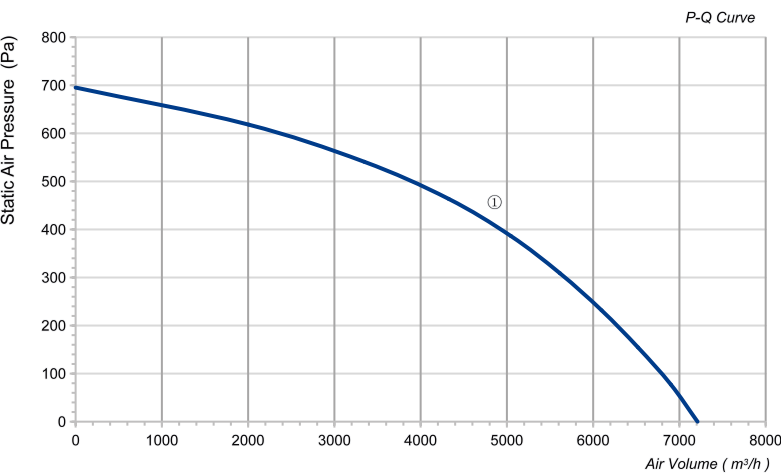


Product Characteristic


- Impeller Material: Aluminum Alloy
 - Direction of Rotation: Clockwise, seen on rotor
 - Mode of Operation: S1
 - Operation Temperature: -40 C ~ +65 C
 - Type of Protection: IP54
 - Insulation Class: F
 - Bearing: Maintenance-free ball bearings
- CE RoHS BSCI ISO ENEC UL LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4D450-188NT-04	380	50	1100	2.5	1400	7210	695	82	/	①

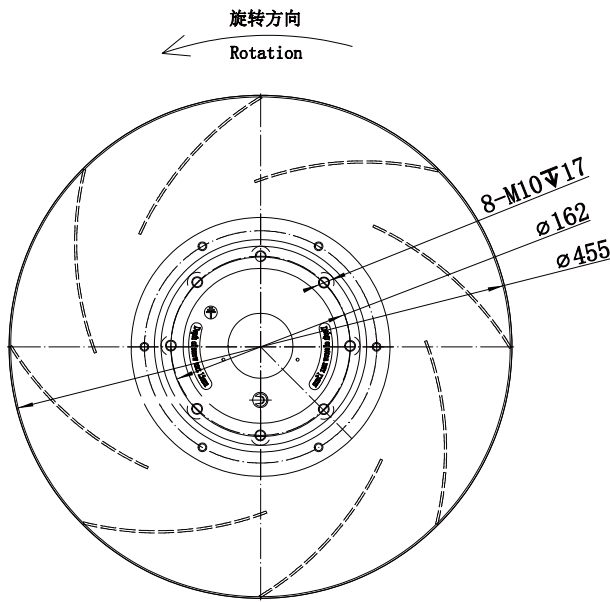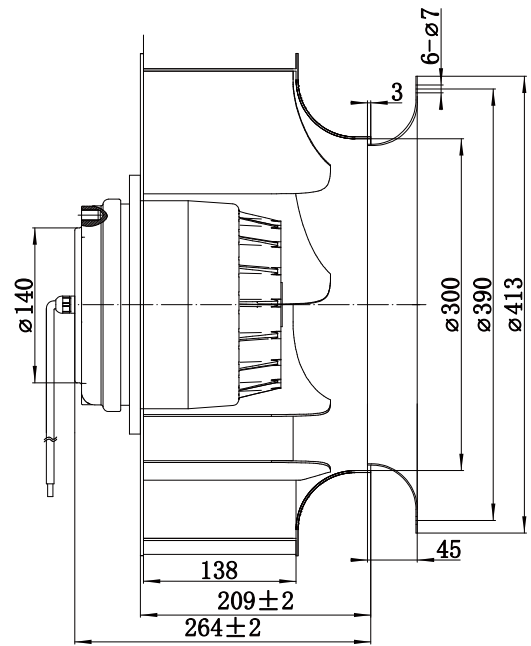

LWBA-450 Series

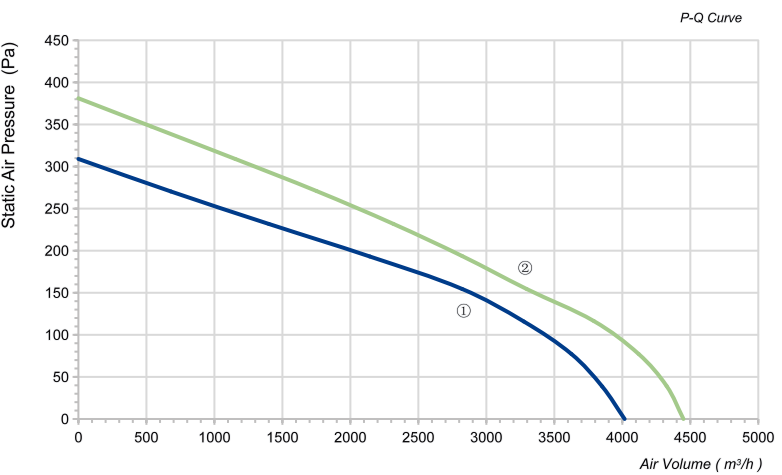

Product Characteristic

- Impeller Material: Aluminum Alloy
 - Direction of Rotation: Clockwise, seen on rotor
 - Mode of Operation: S1
 - Operation Temperature: -40 C ~ +65 C
 - Type of Protection: IP54
 - Insulation Class: F
 - Bearing: Maintenance-free ball bearings
- CE RoHS BSCI ISO ENEC UL LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA6E450-138NS-05	230	50	260	1.3	930	4017	309	60	10uF	①
LWBA6E450-138NS-06	230	60	350	1.6	1050	4450	381	61	10uF	②
LWBA6D450-138NT-07	380	50	300	1	920	4017	309	60	/	①
LWBA4D450-138NT-08	380	60	360	1.2	1050	4450	381	61	/	②

