


LWBA-500 Series





Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 °C ~ +65 °C
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

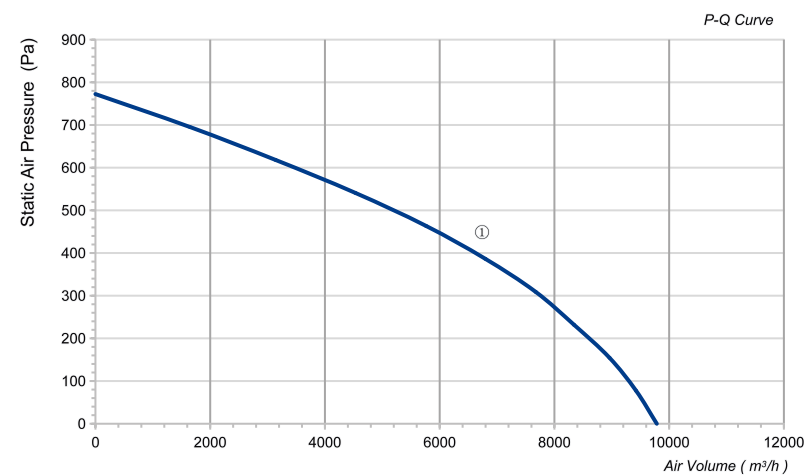


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4D500-188NT-02	380	50	1500	2.6	1400	9785	773	80	/	①

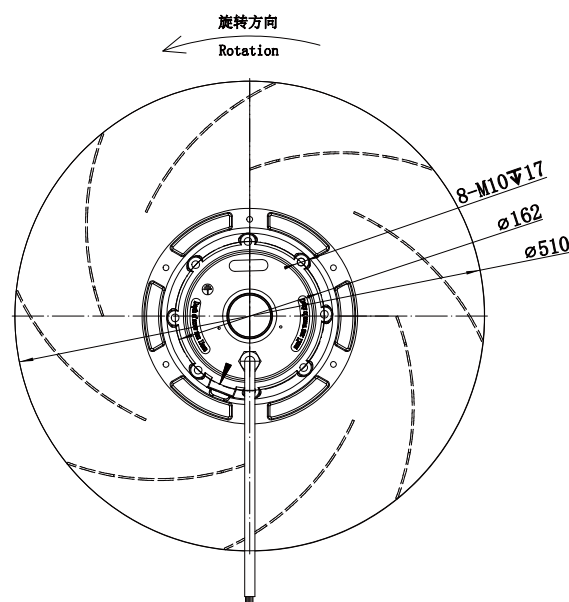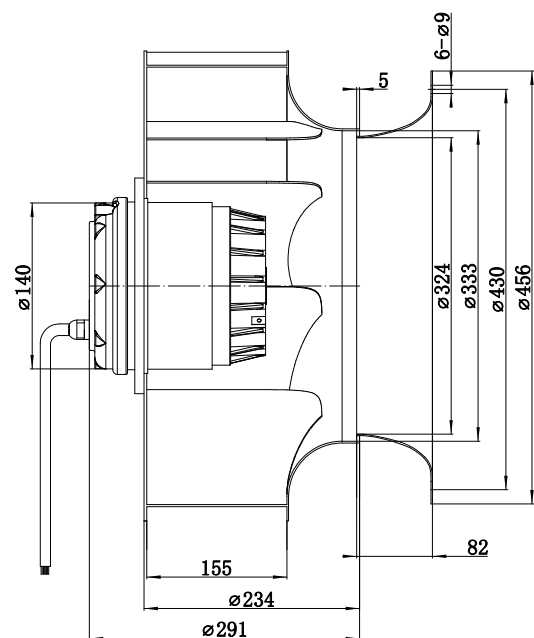

LWBA-500 Series

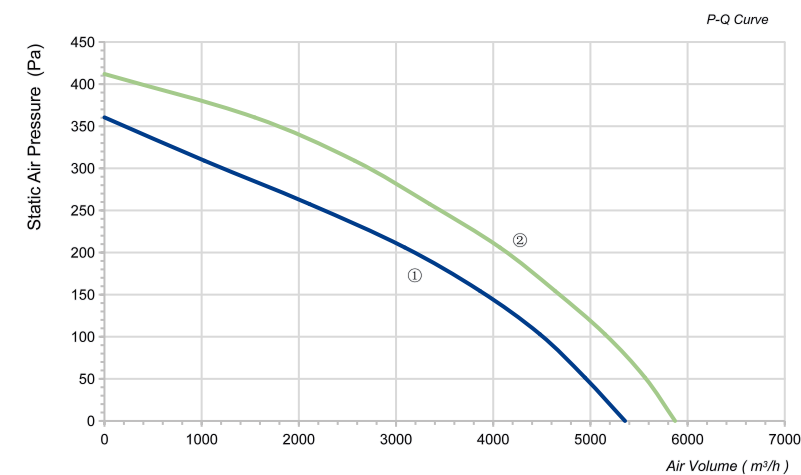

Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 °C ~ +65 °C
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA6D500-138NT-03	380	50	450	1.25	950	5356	361	63	/	①
LWBA6D500-138NT-04	380	60	550	1.4	1050	5871	412	65	/	②

