


LWBA-560 Series

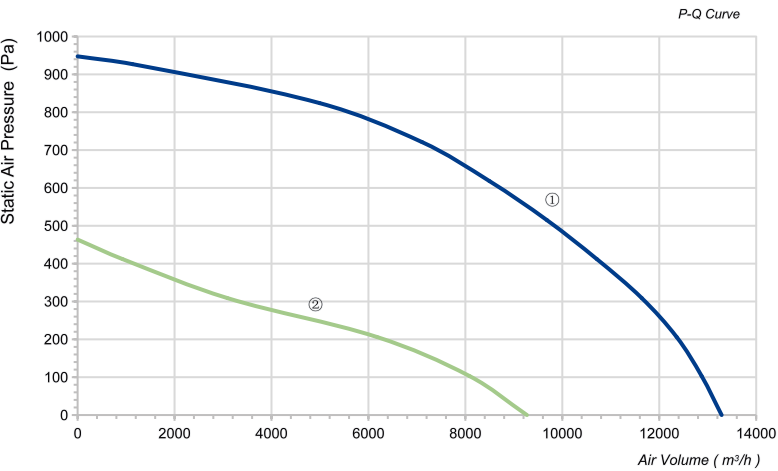


Product Characteristic


- Impeller Material: Aluminum Alloy
 - Direction of Rotation: Clockwise, seen on rotor
 - Mode of Operation: S1
 - Operation Temperature: -40 C ~ +65 C
 - Type of Protection: IP54
 - Insulation Class: F
 - Bearing: Maintenance-free ball bearings
- CE RoHS BSCI ISO ENEC LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4D560-188NT-01	380	50	2500	4.5	1340	13287	948	85	/	①
LWBA6D560-188NT-02	380	50	900	1.8	910	9270	464	73	/	②

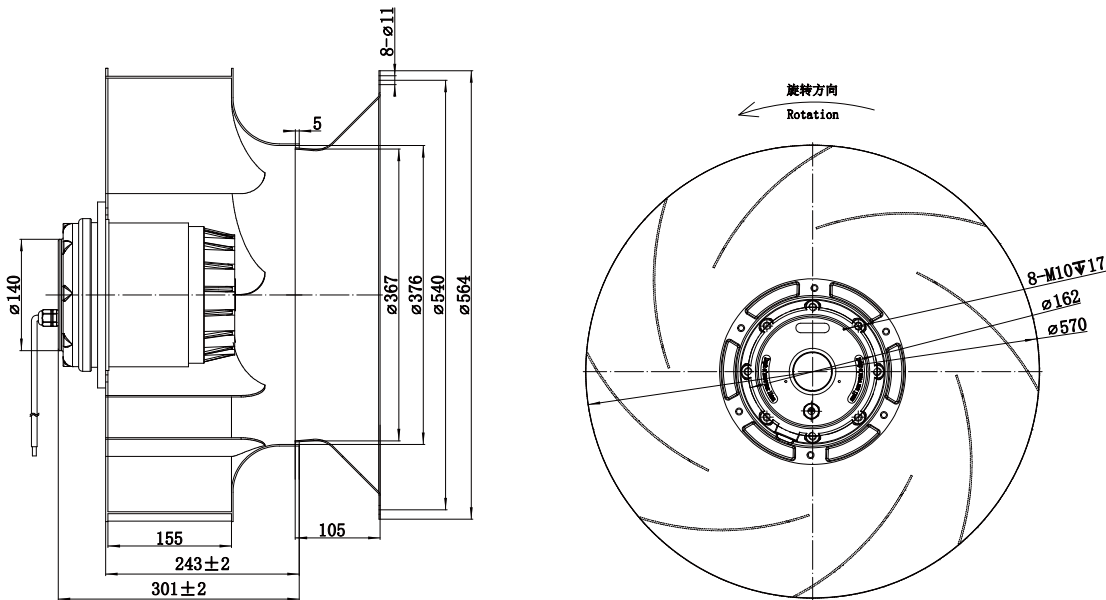

LWBA-560 Series

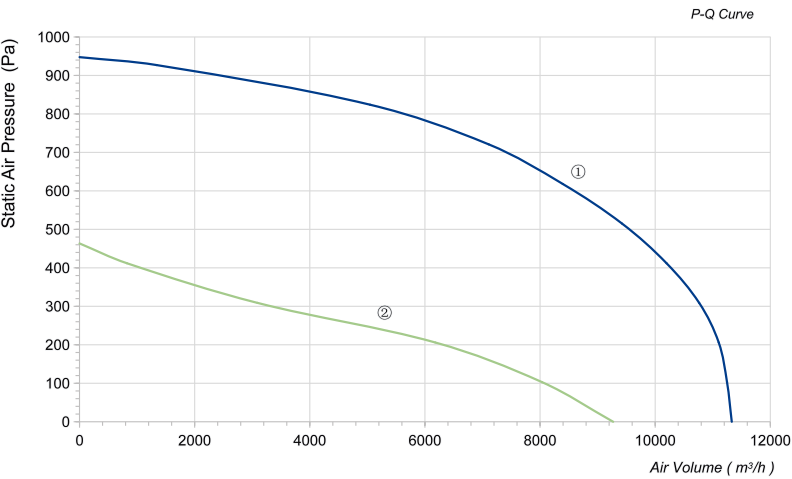

Product Characteristic

- Impeller Material: Aluminum Alloy
 - Direction of Rotation: Clockwise, seen on rotor
 - Mode of Operation: S1
 - Operation Temperature: -40 C ~ +65 C
 - Type of Protection: IP54
 - Insulation Class: F
 - Bearing: Maintenance-free ball bearings
- CE RoHS BSCI ISO ENEC LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4D560-188NT-03	380	50	2500	4.5	1350	11330	948	85	/	①
LWBA6D560-188NT-04	380	50	900	1.8	910	9270	464	73	/	②

