


LWBA-190 Series




Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 °C ~ +65 °C
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

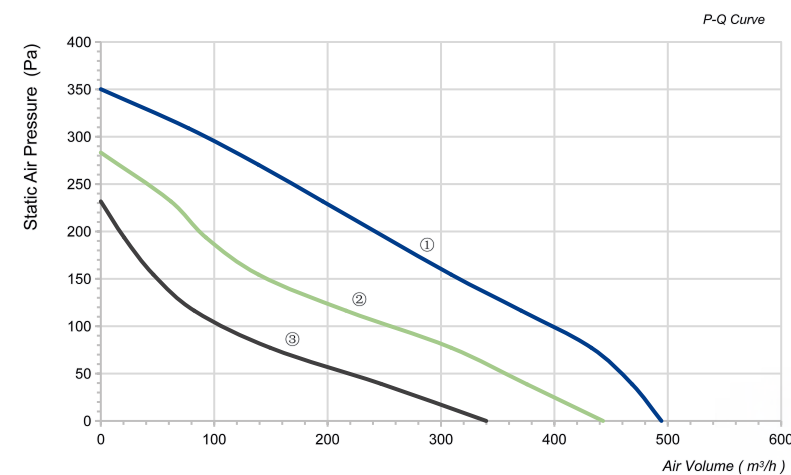


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4E190-092NS-07	230	50	60	0.28	2500	494	350	65	2uF	①
			48	0.23	2000	443	283	60	2uF	②
			45	0.22	1650	340	232	54	2uF	③

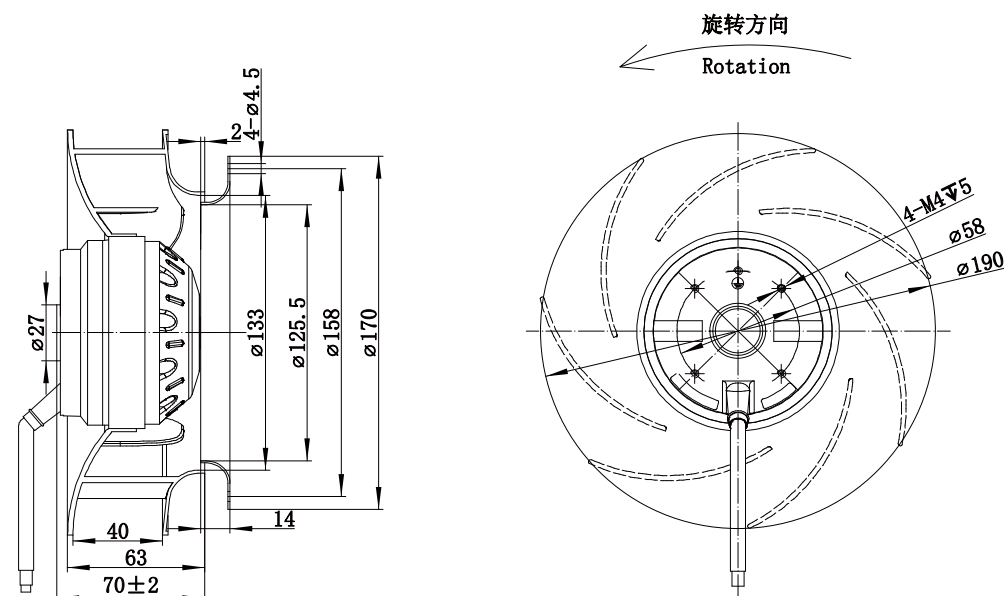

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBA-220 Series

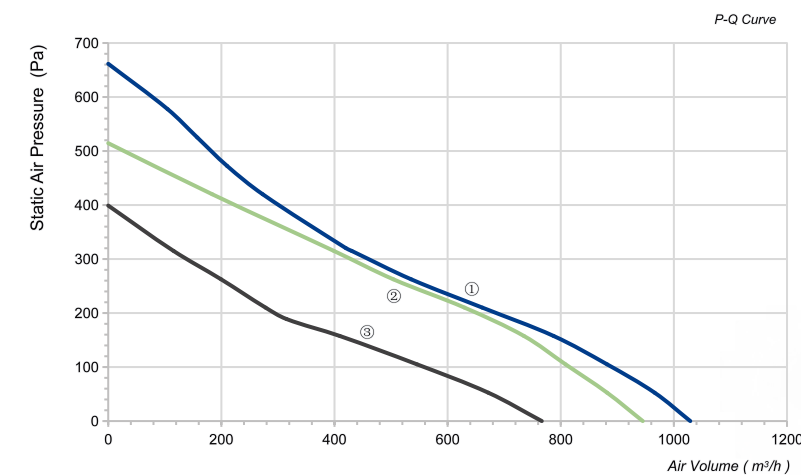

RECOMMEND


Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 °C ~ +65 °C
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E220-092NS-01	230	60	129	0.56	2780	1029	662	67.1	3uF	①
LWBA2E220-092NS-02	230	50	101	0.44	2530	945	515	66.6	3uF	②
LWBA4E220-092NS-03	230	50	64	0.29	2180	767	399	62.2	2.5uF	③

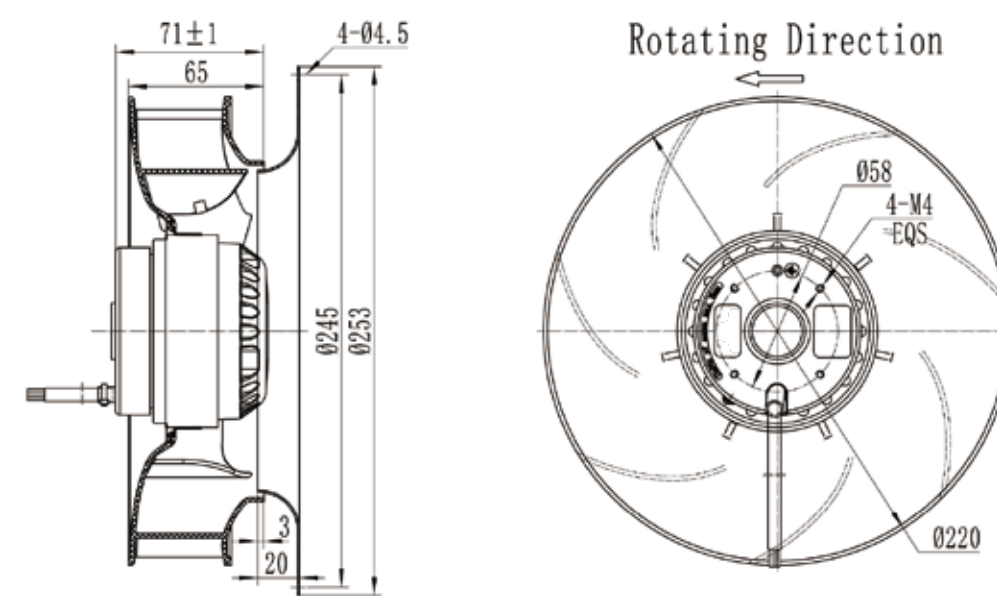

zakaz@ventilatorry.ru +7 (495) 133-95-09