


LWBA-220 Series




Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 C ~ +65 C
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

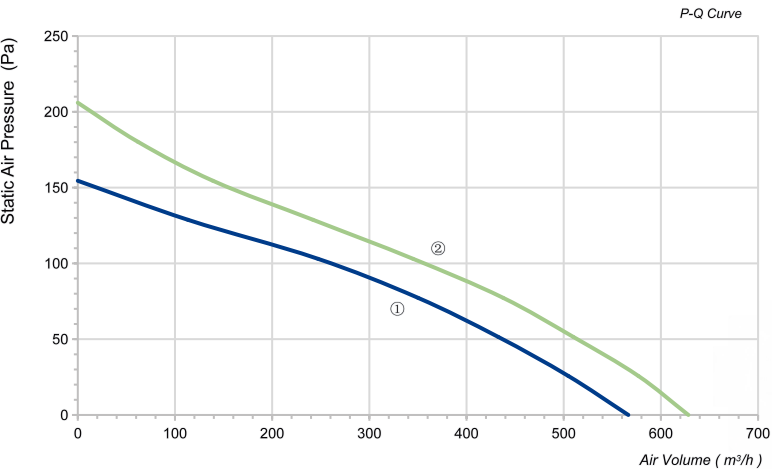


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4E220-092NS-09	230	50	40	0.23	1420	567	155	52	1.5uF	①
LWBA4E220-092NS-10	230	60	41	0.19	1650	628	206	58	1.5uF	②
LWBA4D220-092NT-11	380	50	38	0.08	1400	567	155	52	/	①
LWBA4D220-092NT-12	380	60	41	0.1	1650	628	206	58	/	②

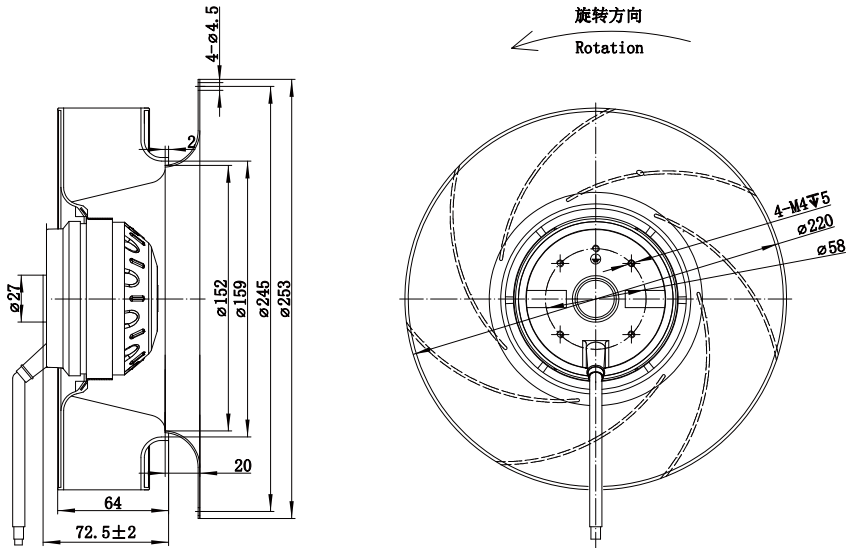

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBA-225 Series

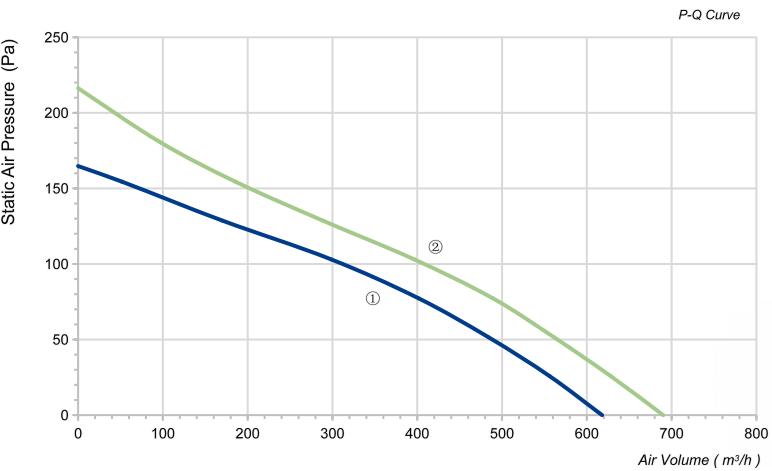


Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 C ~ +65 C
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E225-092NS-01	230	50	45	0.21	1420	618	165	54	1.5uF	①
LWBA4E225-092NS-02	230	60	47	0.2	1650	690	216	60	1.5uF	②
LWBA2D225-092NT-03	380	50	45	0.13	1420	618	165	54	/	①
LWBA4D225-092NT-04	380	60	47	0.13	1650	690	216	60	/	②

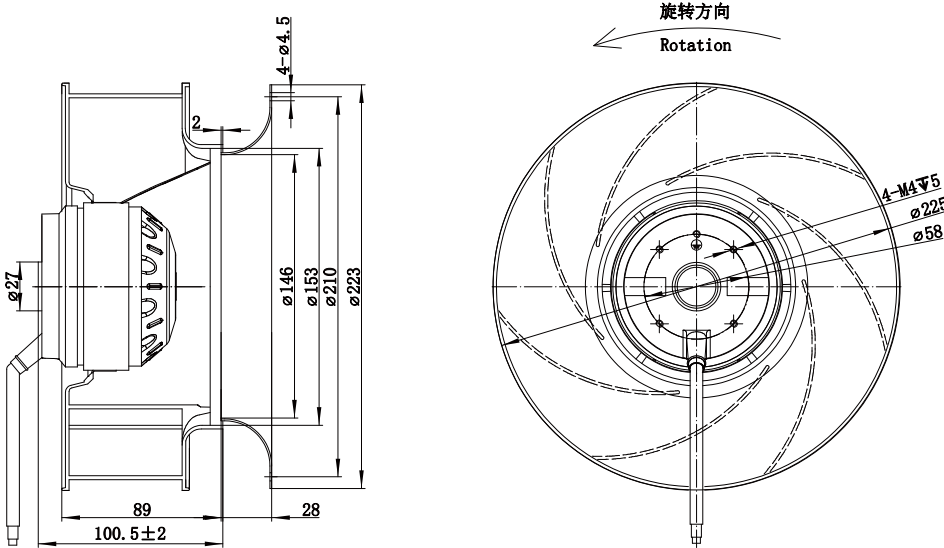

zakaz@ventilatorry.ru +7 (495) 133-95-09