
LWBA-250 Series



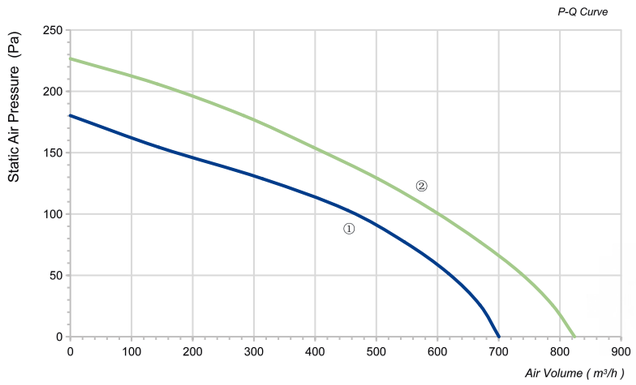


Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4E250-092NS-01	230	50	53	0.28	1400	700	180	61	2uF	①
LWBA4E250-092NS-02	230	60	58	0.28	1600	824	227	64	2uF	②
LWBA4D250-092NT-03	380	50	53	0.15	1400	700	180	61	/	①
LWBA4D250-092NT-04	380	60	58	0.16	1600	824	227	64	/	②

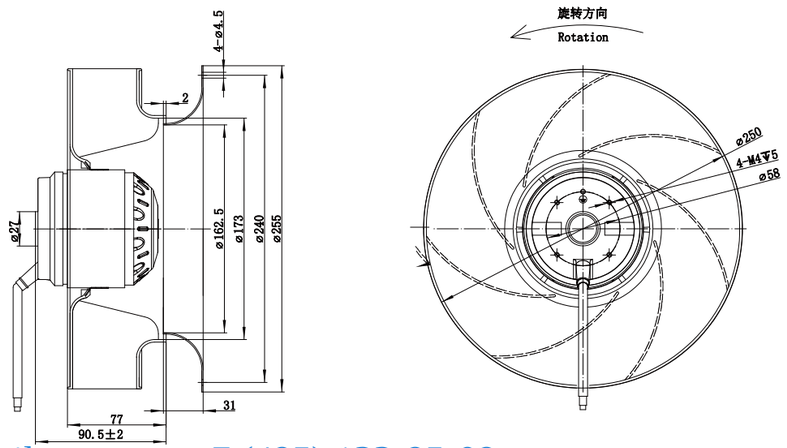

ВЕНТИЛЯТОРЫ.RU
МАГАЗИН ПРОМЫШЛЕННЫХ ВЕНТИЛЯТОРОВ
ventilatorry.ru

LWBA-250 Series

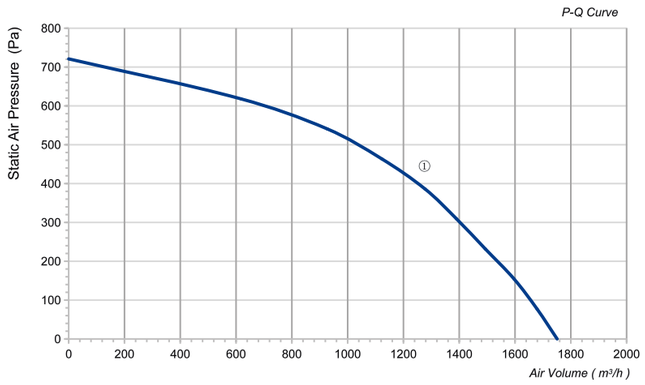




Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E250-092NS-05	230	50	290	1.2	2650	1751	721	76	6uF	①
LWBA2D250-092NT-06	380	50	290	0.9	2800	1751	721	77	/	①

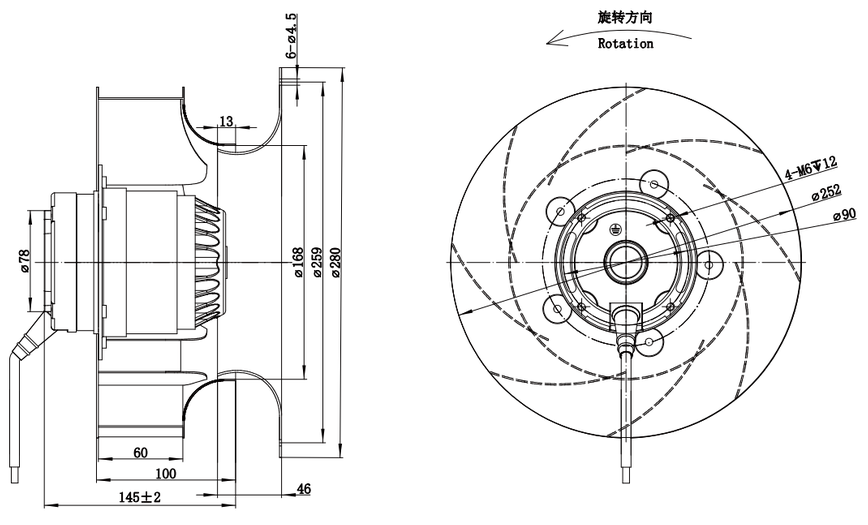

zakaz@ventilatorry.ru +7 (495) 133-95-09