


LWBA-250 Series





Product Characteristic

- Impeller Material: Galvanised sheet steel
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 °C ~ +65 °C
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

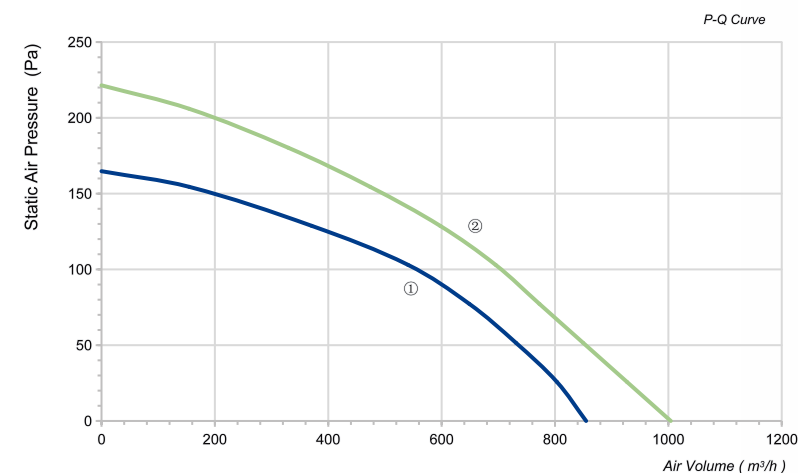


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4E250-092NS-17	230	50	50	0.24	1400	855	165	68	2uF	①
LWBA4E250-092NS-18	230	60	60	0.27	1600	1004	221	70	2uF	②
LWBA4D250-092NT-19	380	50	50	0.15	1450	855	165	68	/	①
LWBA4D250-092NT-20	380	60	60	0.15	1600	1004	221	70	/	②

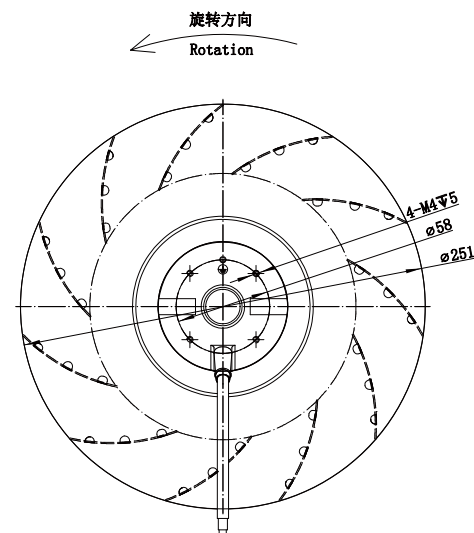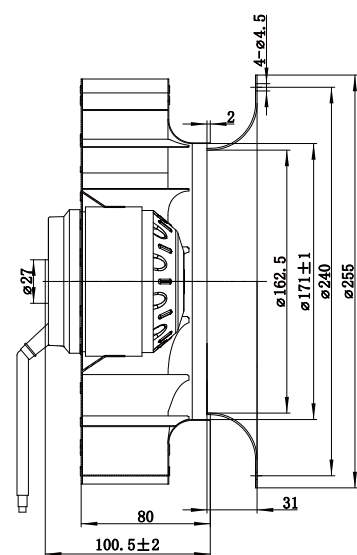

LWBA-280 Series

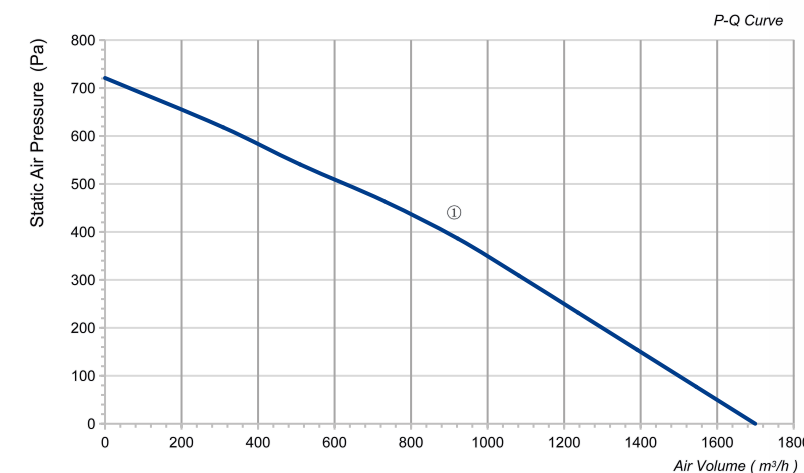

Product Characteristic

- Impeller Material: Galvanised sheet steel
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 °C ~ +65 °C
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E280-092NS-01	230	50	230	1.1	2450	1700	721	79	6uF	①
LWBA2D280-092NT-02	380	50	200	0.6	2500	1700	721	79	/	①

