


LWBA-315 Series





Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 C ~ +65 C
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

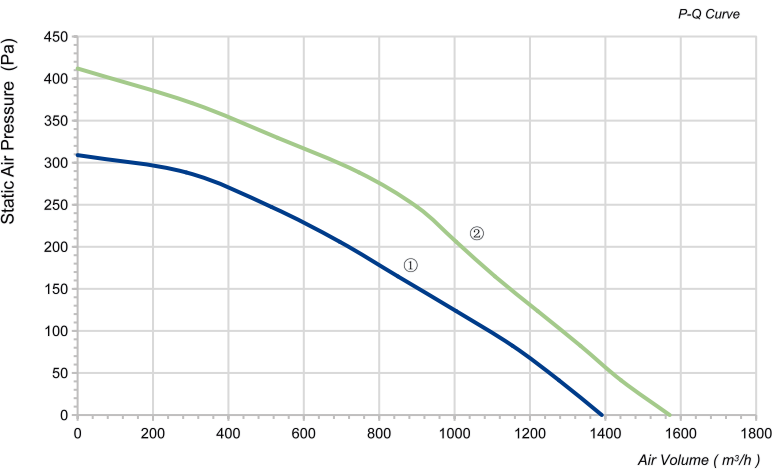


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4E315-102NS-01	230	50	95	0.5	1400	1391	309	56	3uF	①
LWBA4E315-102NS-02	230	60	115	0.6	1600	1571	412	58	3uF	②

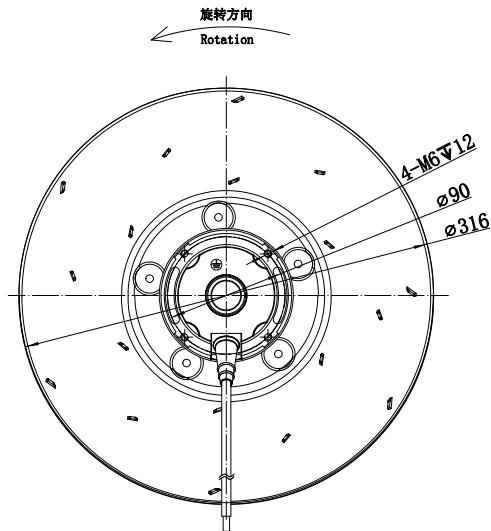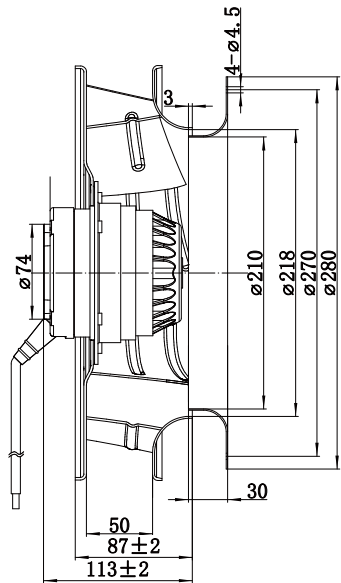

LWBA-315 Series

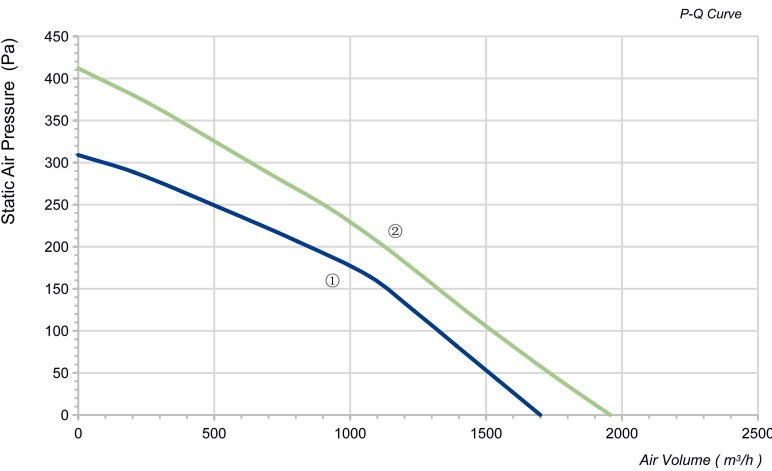

Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 C ~ +65 C
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4E315-102NS-03	230	50	105	0.55	1400	1700	309	60	3uF	①
LWBA4E315-102NS-04	230	60	135	0.65	1600	1957	412	62	3uF	②

