


LWBA-315 Series





Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 C ~ +65 C
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

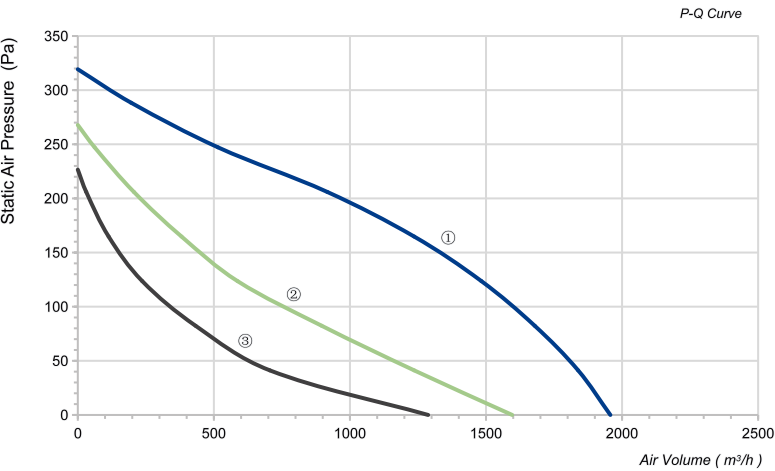


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4E315-102NS-11	230	50	115	0.6	1350	1957	319	63	4uF	①
			85	0.4	1100	1597	268	57	4uF	②
			65	0.3	850	1288	227	51	4uF	③

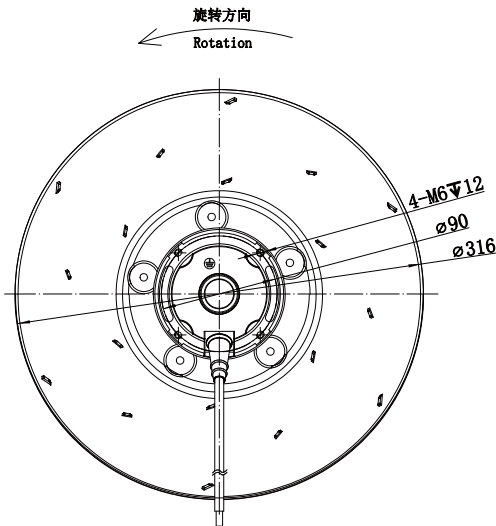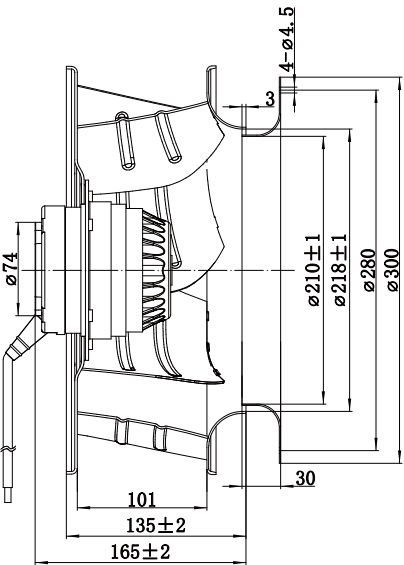

LWBA-315 Series

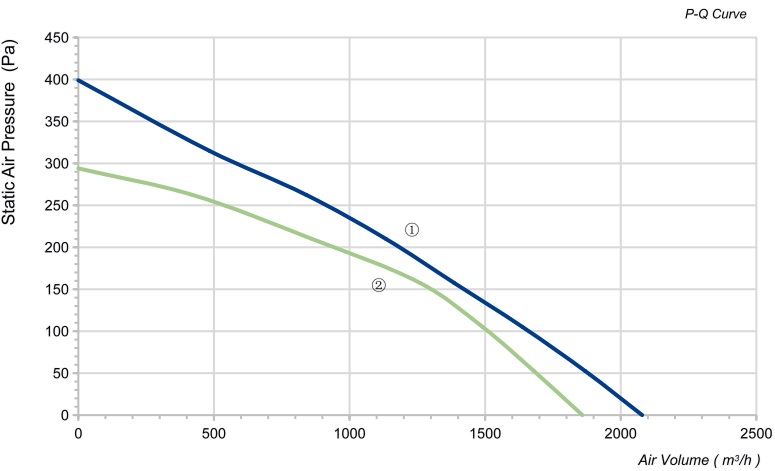

Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 C ~ +65 C
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4E315-102NS-18	230	60	153	0.66	1550	2079	399	69.6	4uF	①
LWBA4E315-102NS-19	230	50	116	0.53	1390	1859	294	67.4	4uF	②

