


LWBA-355 Series

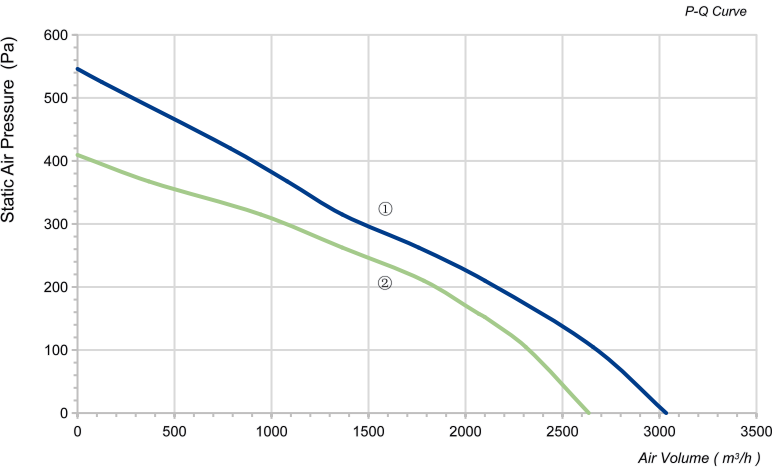


Product Characteristic

- Impeller Material: Aluminum Alloy
 - Direction of Rotation: Clockwise, seen on rotor
 - Mode of Operation: S1
 - Operation Temperature: -40 C ~ +65 C
 - Type of Protection: IP54
 - Insulation Class: F
 - Bearing: Maintenance-free ball bearings
- CE RoHS BSCI ISO ENEC LVD


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4E355-102NS-15	230	60	268	1.17	1635	3035	546	73.8	7.5uF	①
LWBA4E355-102NS-16	230	50	203	0.88	1425	2636	410	69.9	7.5uF	②

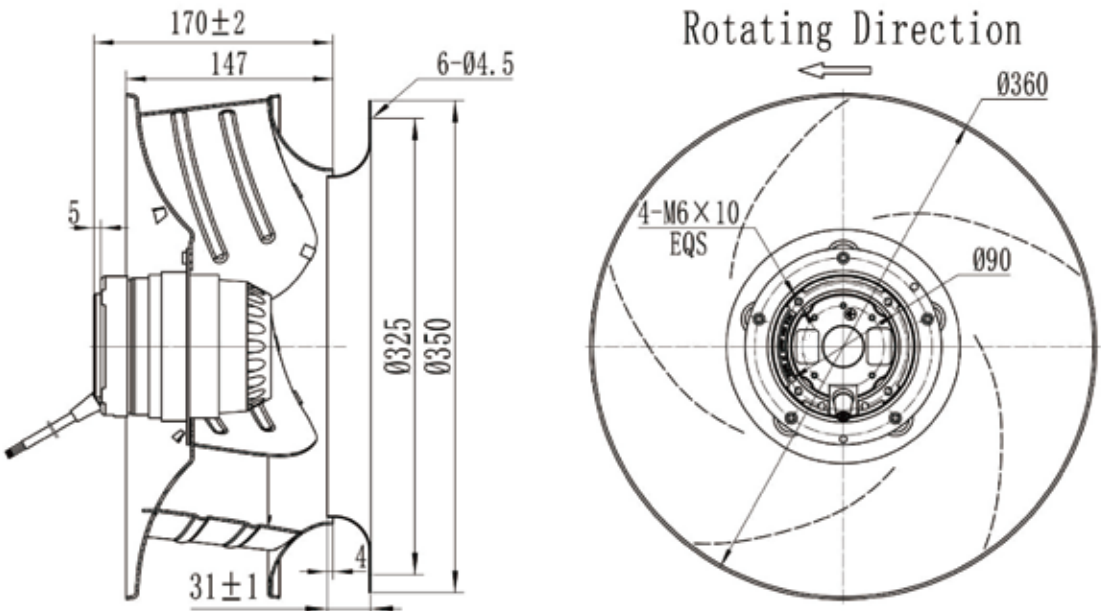

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBA-355 Series

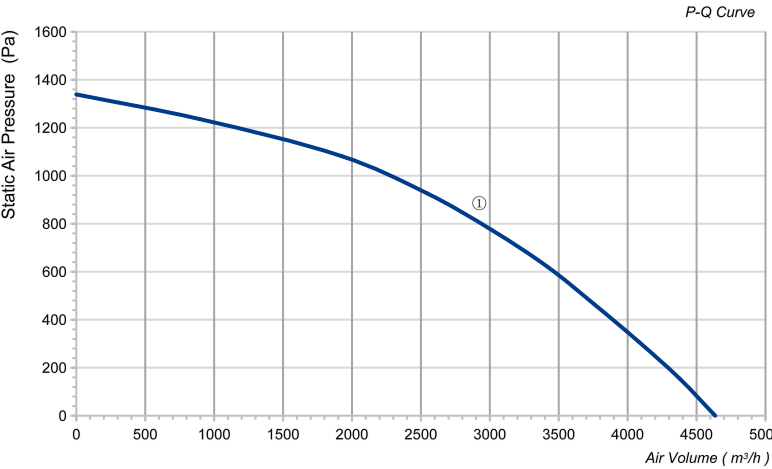


Product Characteristic

- Impeller Material: Aluminum Alloy
 - Direction of Rotation: Clockwise, seen on rotor
 - Mode of Operation: S1
 - Operation Temperature: -40 C ~ +65 C
 - Type of Protection: IP54
 - Insulation Class: F
 - Bearing: Maintenance-free ball bearings
- CE RoHS BSCI ISO ENEC LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2D355-188NT-17	380	50	1600	2.6	2700	4635	1339	90	/	①

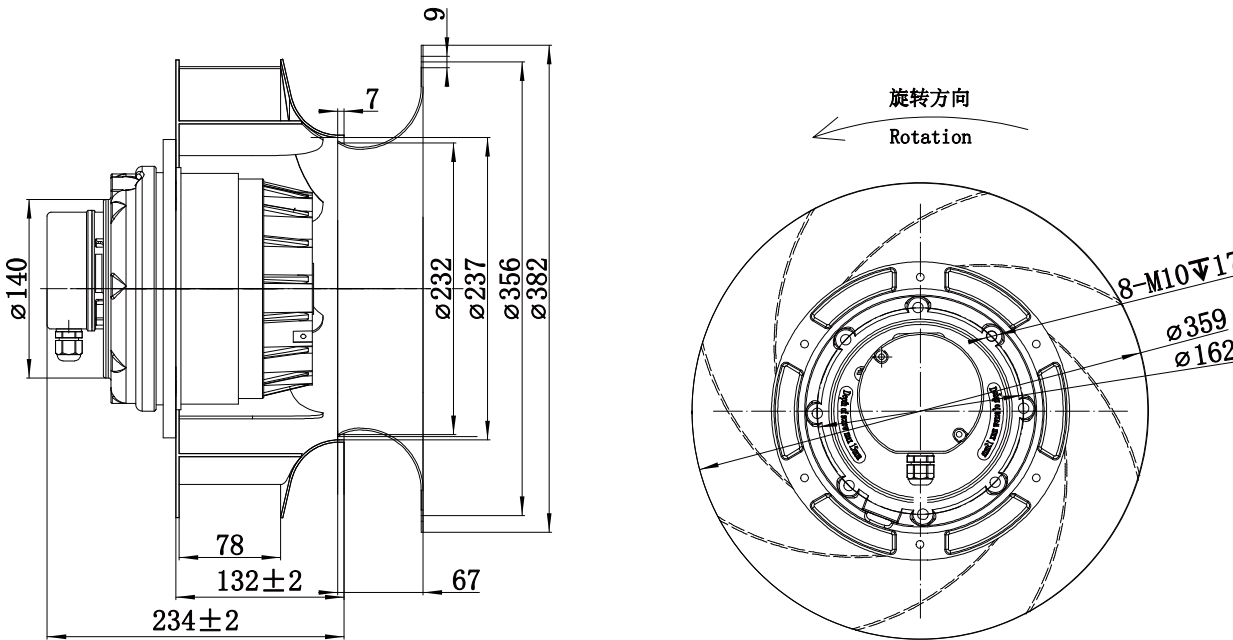

zakaz@ventilatorry.ru +7 (495) 133-95-09