


LWBD-175 Series




Product Characteristic

- Impeller Material: Plastic PA66+25GF
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP42
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Motor Type: BLDC
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25 °C ~ +60 °C
- Technical Features: Control input 0-10VDC/PWM

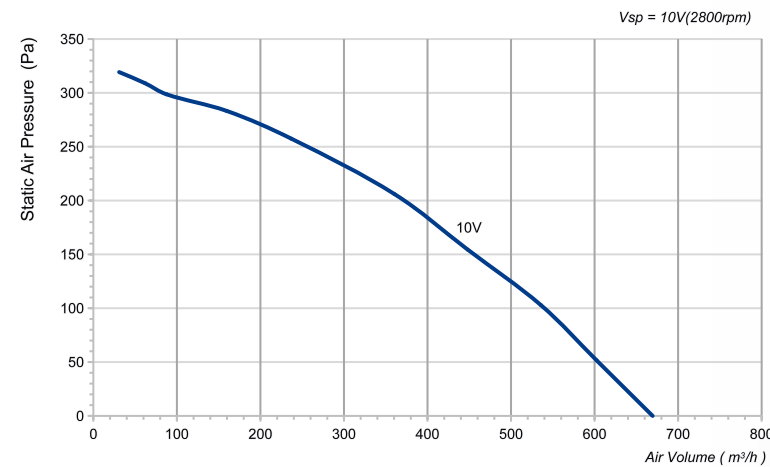


Technical Specifications

Model	Voltage (V)	Current (A)	Rated Power (W)	Speed (RPM)	Air Volume (m³/h)	Static Pressure (Pa)	Noise [dB(A)]
LWBD3G175-072NM-04	24	2.1	50	2800	670	319	68

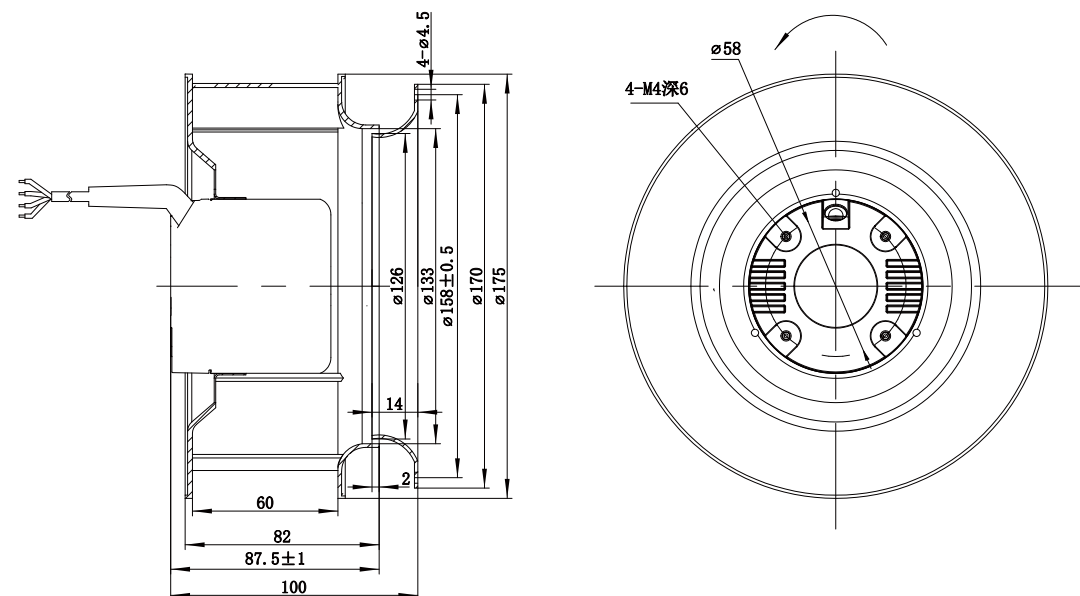

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBD-190 Series

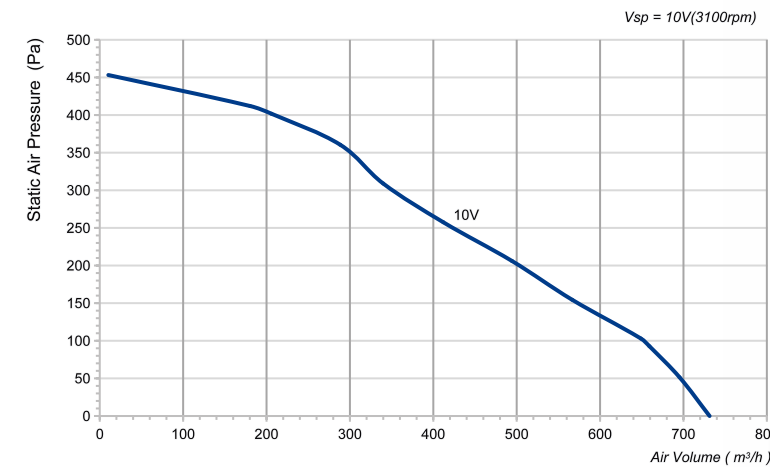


Product Characteristic

- Impeller Material: Plastic PA66+25GF
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP42
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Motor Type: BLDC
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25 °C ~ +60 °C
- Technical Features: Control input 0-10VDC/PWM



Technical Specifications

Model	Voltage (V)	Current (A)	Rated Power (W)	Speed (RPM)	Air Volume (m³/h)	Static Pressure (Pa)	Noise [dB(A)]
LWBD3G190-072NM-04	24	3.1	75	3100	731	453	70
LWBD3G190-072NH-05	48	1.6	75	3100	731	453	70

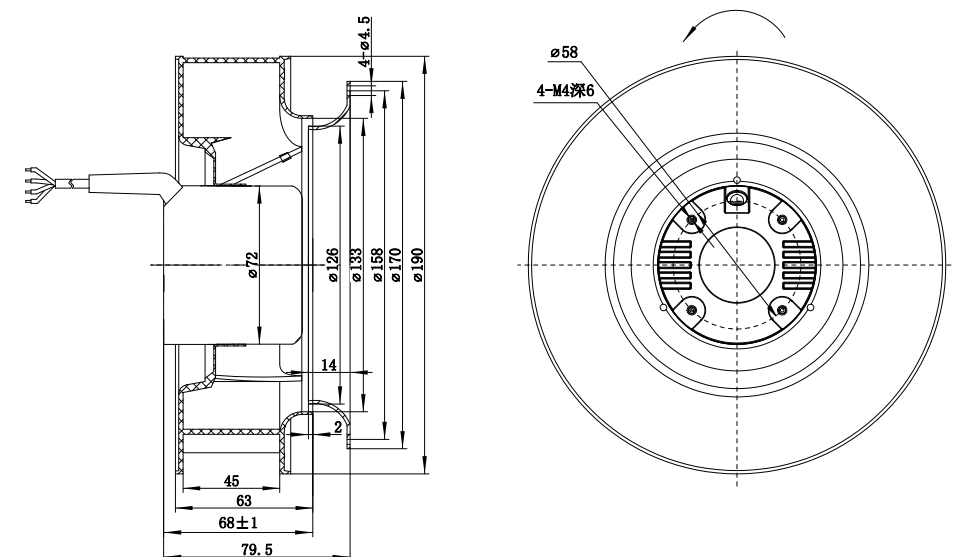

zakaz@ventilatorry.ru +7 (495) 133-95-09