


LWBD-190 Series




Product Characteristic

- | | |
|--|---|
| • Impeller Material: Plastic PA66+25GF | • Motor Type: BLDC |
| • Direction of Rotation: Clockwise, seen on rotor | • Mode of Operation: S1 |
| • Protection Class: IP42 | • Insulation Class: F |
| • Mounting Position: Horizontal or Vertical | • Operation Temperature: -25 °C ~ +60 °C |
| • Bearing: Maintenance-free ball bearings | • Technical Features: Control input 0-10VDC/PWM |
| • Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start | |

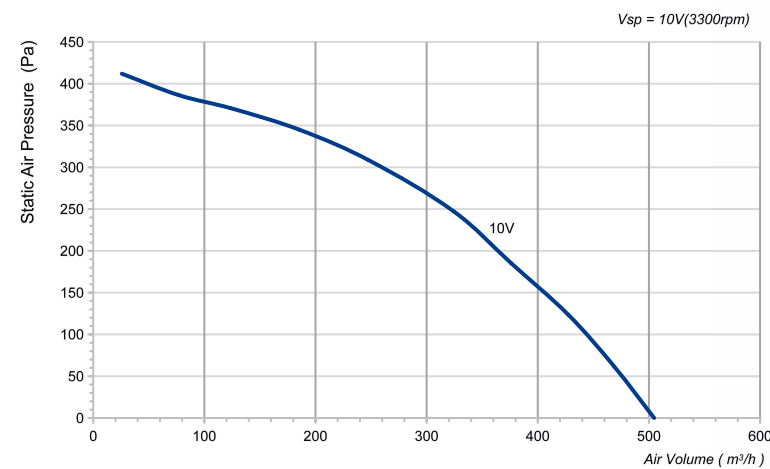


Technical Specifications

Model	Voltage (V)	Current (A)	Rated Power (W)	Speed (RPM)	Air Volume (m³/h)	Static Pressure (Pa)	Noise [dB(A)]
LWBD3G190-092NM-06	24	3.6	85	3300	505	412	73
LWBD3G190-092NH-07	48	1.8	85	3300	505	412	73

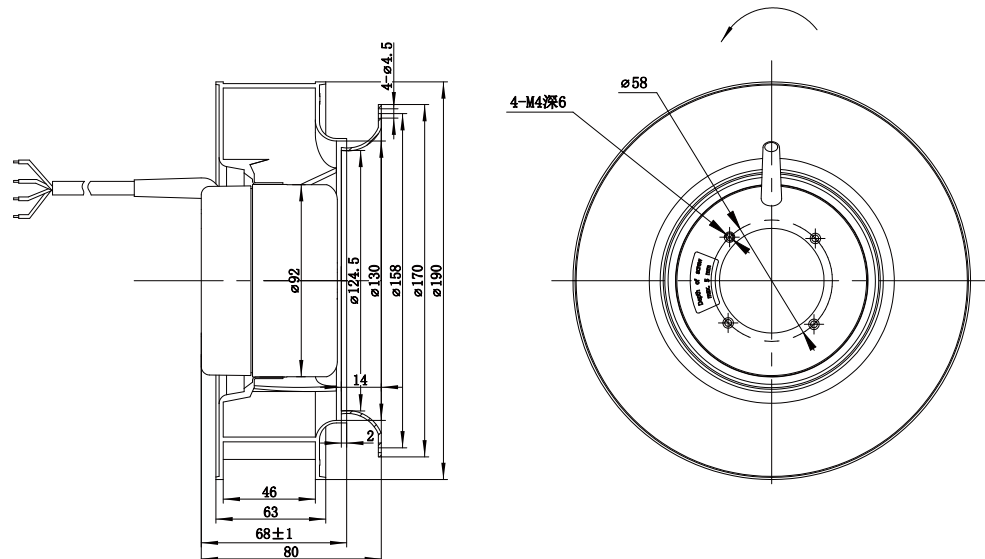

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBD-220 Series

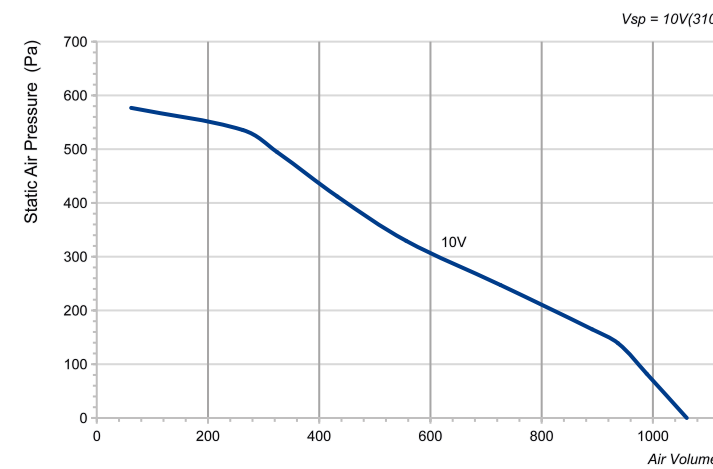


Product Characteristic

- | | |
|--|---|
| • Impeller Material: Plastic PA66+25GF | • Motor Type: BLDC |
| • Direction of Rotation: Clockwise, seen on rotor | • Mode of Operation: S1 |
| • Protection Class: IP42 | • Insulation Class: F |
| • Mounting Position: Horizontal or Vertical | • Operation Temperature: -25 °C ~ +60 °C |
| • Bearing: Maintenance-free ball bearings | • Technical Features: Control input 0-10VDC/PWM |
| • Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start | |



Technical Specifications

Model	Voltage (V)	Current (A)	Rated Power (W)	Speed (RPM)	Air Volume (m³/h)	Static Pressure (Pa)	Noise [dB(A)]
LWBD3G220-092NM-04	24	4.6	110	3100	1030	577	73
LWBD3G220-092NH-05	48	2.3	110	3100	1030	577	73

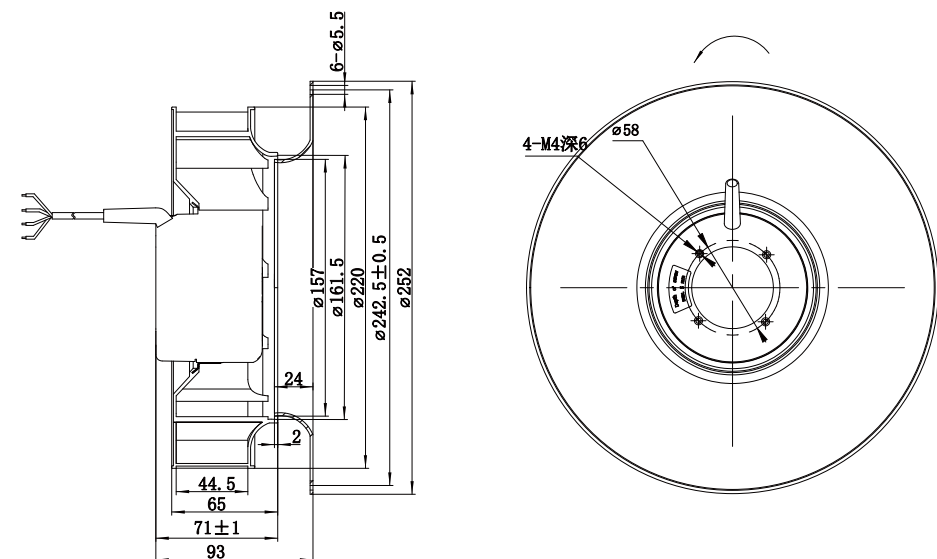

zakaz@ventilatorry.ru +7 (495) 133-95-09