


LWBD-225 Series





Product Characteristic

- | | | | |
|--------------------------|---|--------------------------|---------------------------|
| • Impeller Material: | Plastic PA66+25GF | • Motor Type: | BLDC |
| • Direction of Rotation: | Clockwise,seen on rotor | • Mode of Operation: | S1 |
| • Protection Class: | IP42 | • Insulation Class: | F |
| • Mounting Position: | Horizontal or Vertical | • Operation Temperature: | -25 C ~ +60 C |
| • Bearing: | Maintenance-free ball bearings | • Technical Features: | Control input 0-10VDC/PWM |
| • Protection: | Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start | | |

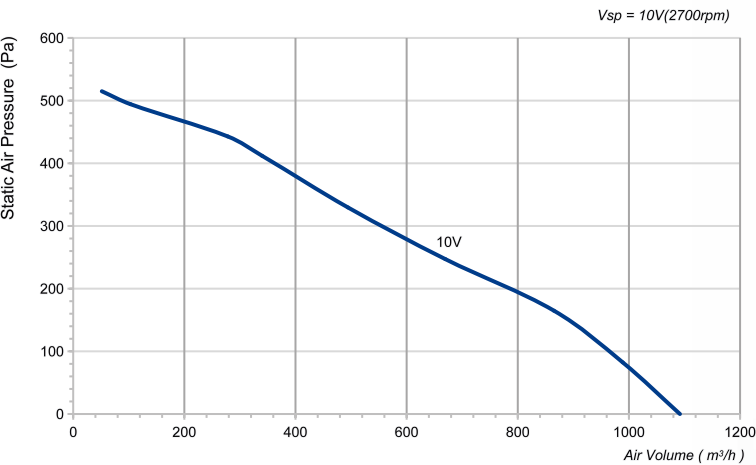


Technical Specifications

Model	Voltage (V)	Current (A)	Rated Power (W)	Speed (RPM)	Air Volume (m³/h)	Static Pressure (Pa)	Noise [dB(A)]
LWBD3G225-092NM-04	24	4.17	100	2700	1092	515	72
LWBD3G225-092NH-05	48	2.08	100	2700	1092	515	72

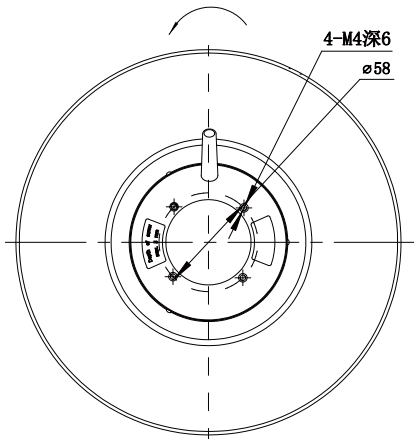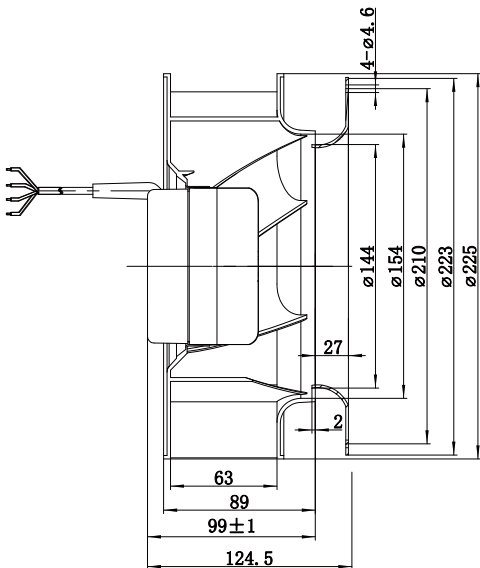

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBD-225 Series

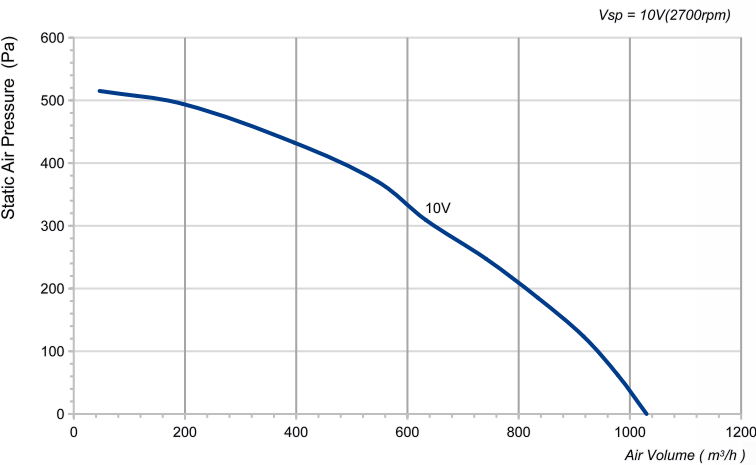



Product Characteristic

- | | | | |
|--------------------------|---|--------------------------|---------------------------|
| • Impeller Material: | Plastic PA66+25GF | • Motor Type: | BLDC |
| • Direction of Rotation: | Clockwise,seen on rotor | • Mode of Operation: | S1 |
| • Protection Class: | IP42 | • Insulation Class: | F |
| • Mounting Position: | Horizontal or Vertical | • Operation Temperature: | -25 C ~ +60 C |
| • Bearing: | Maintenance-free ball bearings | • Technical Features: | Control input 0-10VDC/PWM |
| • Protection: | Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start | | |



Technical Specifications

Model	Voltage (V)	Current (A)	Rated Power (W)	Speed (RPM)	Air Volume (m³/h)	Static Pressure (Pa)	Noise [dB(A)]
LWBD3G225-092NH-06	48	2.1	100	2700	1030	515	70

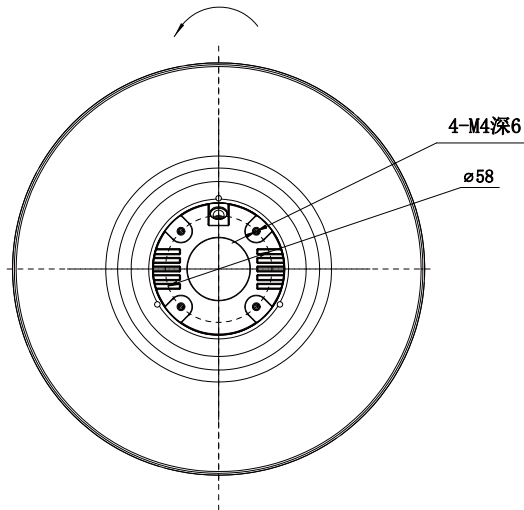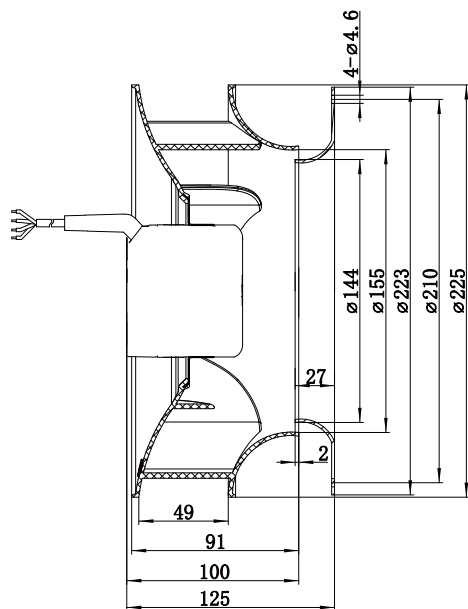

zakaz@ventilatorry.ru +7 (495) 133-95-09