


LWBD-250 Series




Product Characteristic

- | | |
|---|---|
| • Impeller Material: Plastic PA66+25GF | • Motor Type: BLDC |
| • Direction of Rotation: Clockwise,seen on rotor | • Mode of Operation: S1 |
| • Protection Class: IP44 | • Insulation Class: F |
| • Mounting Position: Horizontal or Vertical | • Operation Temperature: -25 C ~ +60 C |
| • Bearing: Maintenance-free ball bearings | • Technical Features: Control input 0-10VDC/PWM |
| • Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start | |

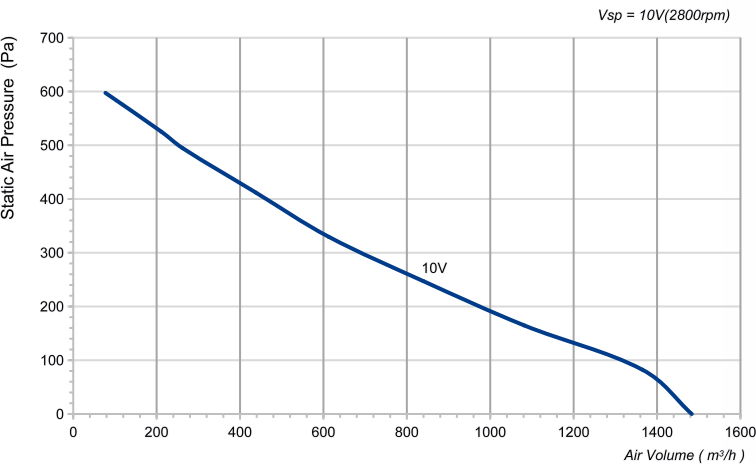


Technical Specifications

Model	Voltage (V)	Current (A)	Rated Power (W)	Speed (RPM)	Air Volume (m³/h)	Static Pressure (Pa)	Noise [dB(A)]
LWBD3G250-072NZ-07	310	0.35	110	2800	1483	597	69

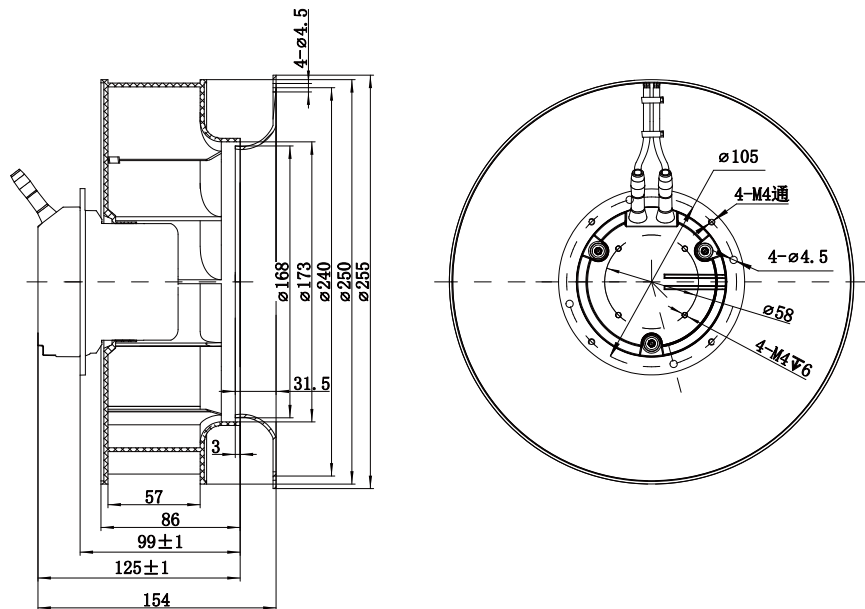

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBD-280 Series

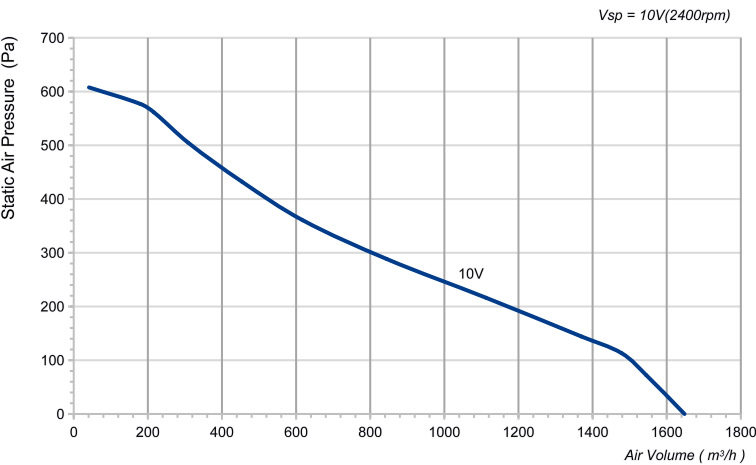


Product Characteristic

- | | |
|---|---|
| • Impeller Material: Sheet Galvanized | • Motor Type: BLDC |
| • Direction of Rotation: Clockwise,seen on rotor | • Mode of Operation: S1 |
| • Protection Class: IP42 | • Insulation Class: F |
| • Mounting Position: Horizontal or Vertical | • Operation Temperature: -25 C ~ +60 C |
| • Bearing: Maintenance-free ball bearings | • Technical Features: Control input 0-10VDC/PWM |
| • Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start | |



Technical Specifications

Model	Voltage (V)	Current (A)	Rated Power (W)	Speed (RPM)	Air Volume (m³/h)	Static Pressure (Pa)	Noise [dB(A)]
LWBD3G280-092NH-04	48	2.8	130	2400	1648	608	72

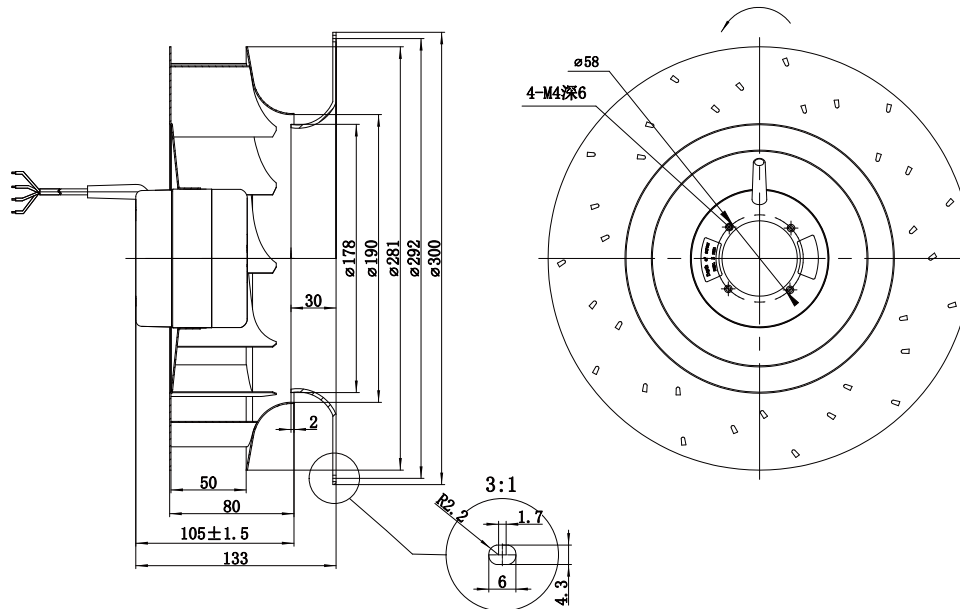

zakaz@ventilatorry.ru +7 (495) 133-95-09