


LWBE-133 Serise



Product Characteristic


• Impeller Material:	Plastic PA66	• Supply Voltage:	230V,50/60Hz
• Direction of Rotation:	Clockwise,seen on rotor	• Mode of Operation:	S1
• Protection Class:	IP54	• Insulation Class:	F
• Mounting Position:	Horizontal or Vertical	• Operation Temperature:	-25 C ~ +60 C
• Bearing:	Maintenance-free ball bearings	• Technical Features:	Control input 0-10VDC/PWM
• Protection:	Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start		

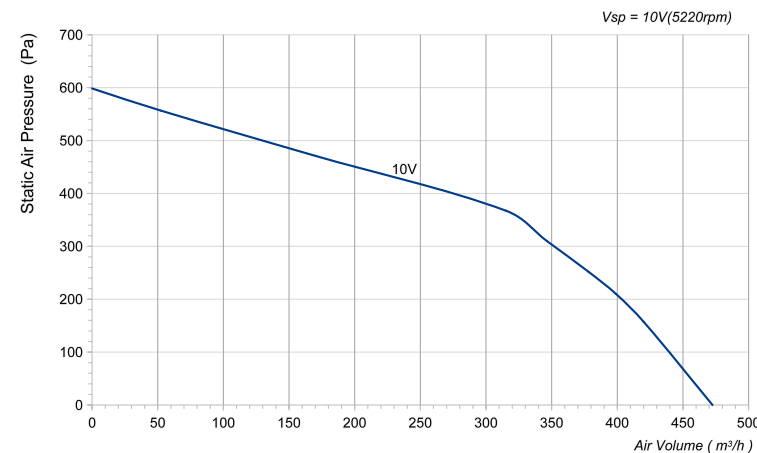

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G133-072NS-06	230	72	/	473	609	5220	/

LWBE-155 Serise

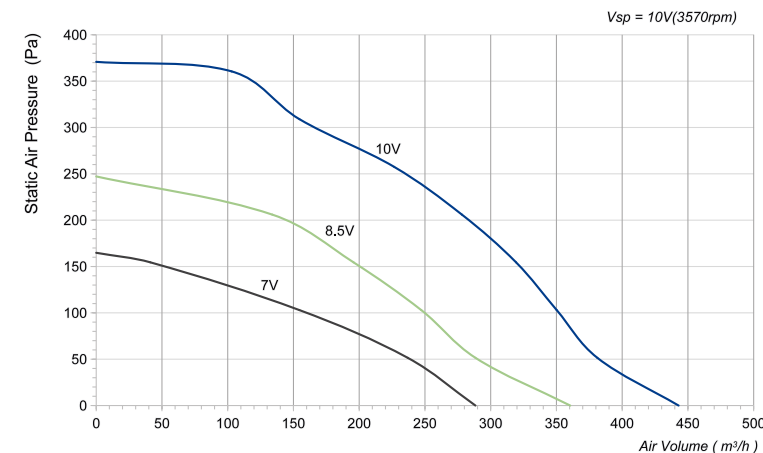

Product Characteristic

• Impeller Material:	Plastic PA66	• Supply Voltage:	230V,50/60Hz
• Direction of Rotation:	Clockwise,seen on rotor	• Mode of Operation:	S1
• Protection Class:	IP44	• Insulation Class:	F
• Mounting Position:	Horizontal or Vertical	• Operation Temperature:	-25 C ~ +60 C
• Bearing:	Maintenance-free ball bearings	• Technical Features:	Control input 0-10VDC/PWM
• Protection:	Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start		



Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G155-072NS-02	230	40	0.3	433	371	3570	63

