


# LWBE-220 Serise




## Product Characteristic

- |                          |                                                                                         |                          |                           |
|--------------------------|-----------------------------------------------------------------------------------------|--------------------------|---------------------------|
| • Impeller Material:     | PA6+GF                                                                                  | • Supply Voltage:        | 230V,50/60Hz              |
| • Direction of Rotation: | Clockwise,seen on rotor                                                                 | • Mode of Operation:     | S1                        |
| • Protection Class:      | IP55                                                                                    | • Insulation Class:      | F                         |
| • Mounting Position:     | Horizontal or Vertical                                                                  | • Operation Temperature: | -25 C ~ +60 C             |
| • Bearing:               | Maintenance-free ball bearings                                                          | • Technical Features:    | Control input 0-10VDC/PWM |
| • Protection:            | Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start |                          |                           |

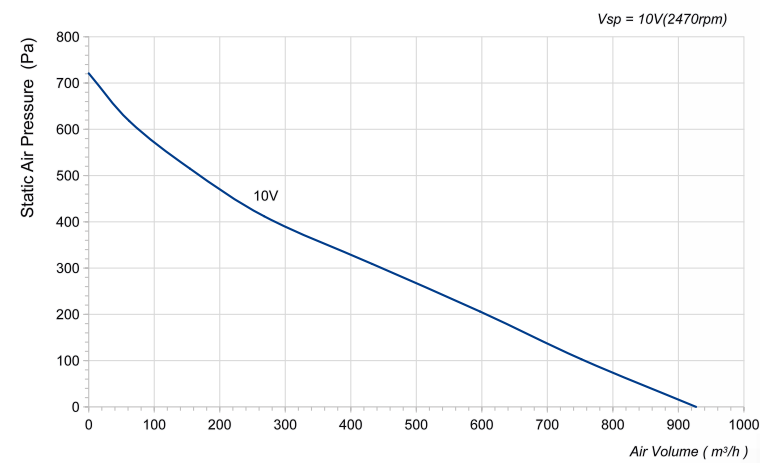


## Technical Specifications

| Model              | Voltage (V) | Input Power (W) | Current (A) | Air Volume (m³/h) | Static Pressure (Pa) | Speed (RPM) | Noise [dB(A)] |
|--------------------|-------------|-----------------|-------------|-------------------|----------------------|-------------|---------------|
| LWBE3G220-072NS-07 | 230         | 86              | 0.71        | 937               | 721                  | 2470        | 68            |
| LWBE3G220-072NU-13 | 115         | 86              | 1.4         | 937               | 721                  | 2470        | 68            |

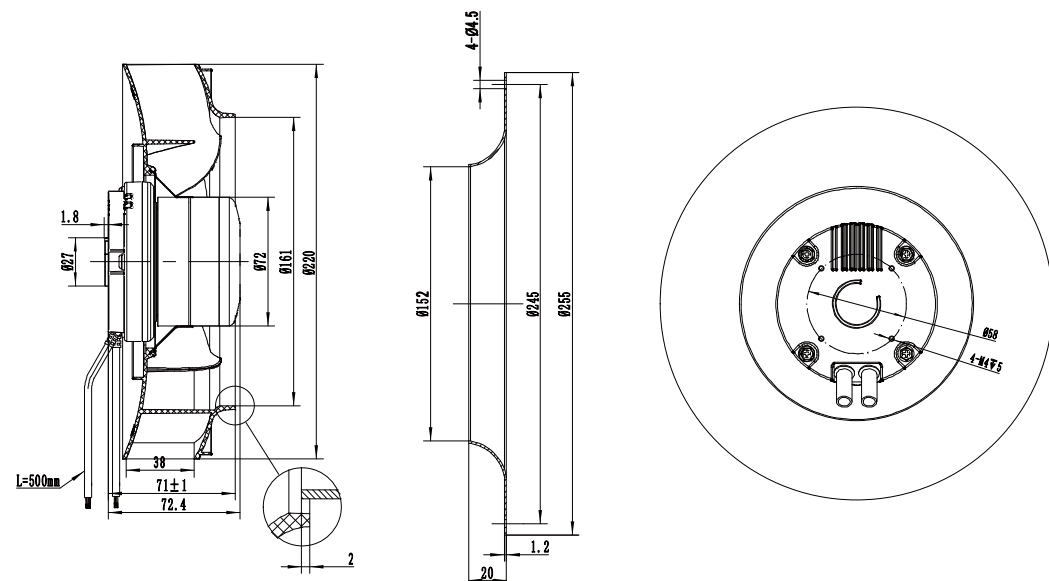

zakaz@ventilatorry.ru +7 (495) 133-95-09

# LWBE-220 Serise

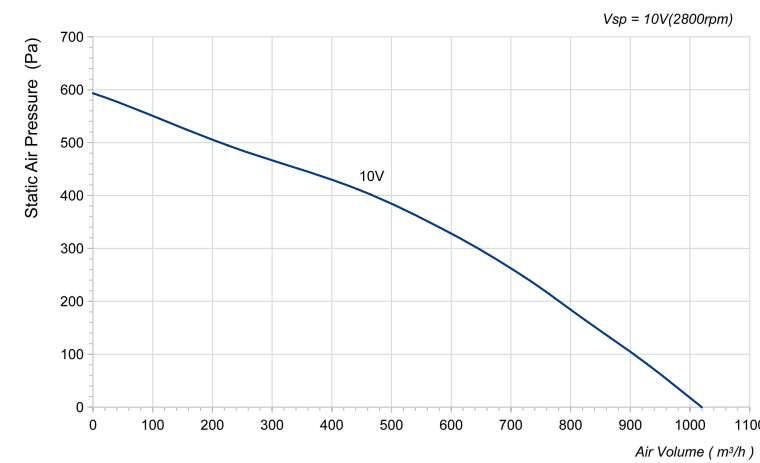


## Product Characteristic

- |                          |                                                                                         |                          |                           |
|--------------------------|-----------------------------------------------------------------------------------------|--------------------------|---------------------------|
| • Impeller Material:     | PA6+GF                                                                                  | • Supply Voltage:        | 230V,50/60Hz              |
| • Direction of Rotation: | Clockwise,seen on rotor                                                                 | • Mode of Operation:     | S1                        |
| • Protection Class:      | IP55                                                                                    | • Insulation Class:      | F                         |
| • Mounting Position:     | Horizontal or Vertical                                                                  | • Operation Temperature: | -25 C ~ +60 C             |
| • Bearing:               | Maintenance-free ball bearings                                                          | • Technical Features:    | Control input 0-10VDC/PWM |
| • Protection:            | Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start |                          |                           |



## Technical Specifications

| Model              | Voltage (V) | Input Power (W) | Current (A) | Air Volume (m³/h) | Static Pressure (Pa) | Speed (RPM) | Noise [dB(A)] |
|--------------------|-------------|-----------------|-------------|-------------------|----------------------|-------------|---------------|
| LWBE3G220-072NS-09 | 230         | 115             | 0.9         | 1020              | 597                  | 2800        | 69            |
| LWBE3G220-072NU-14 | 115         | 115             | 1.8         | 1020              | 597                  | 2800        | 69            |

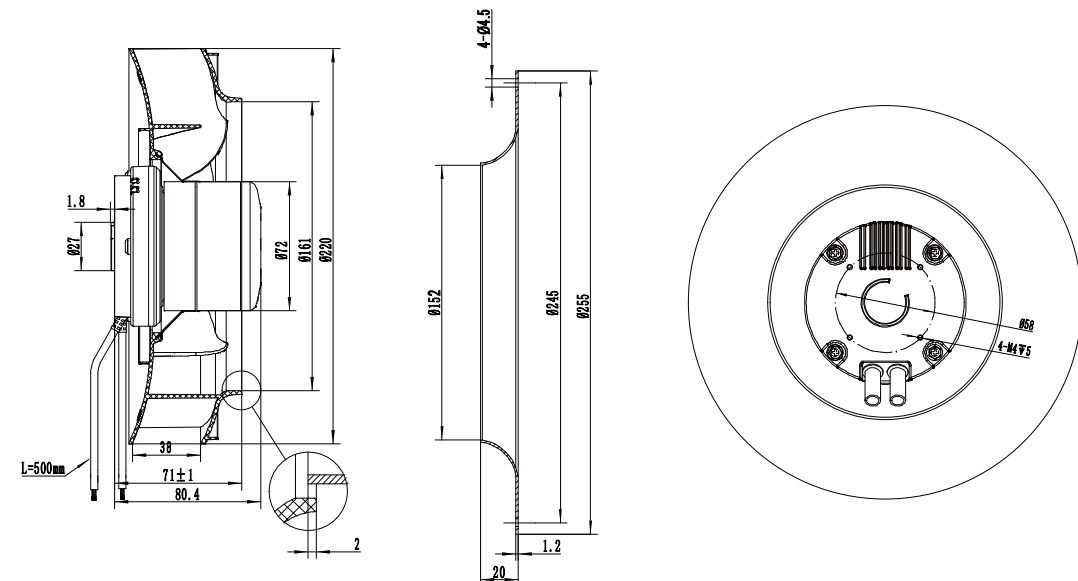

zakaz@ventilatorry.ru +7 (495) 133-95-09