


LWBE-225 Serise




Product Characteristic

- Impeller Material: PA6+GF
- Direction of Rotation: Clockwise,seen on rotor
- Protection Class: IP55
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25 C ~ +60 C
- Technical Features: Control input 0-10VDC/PWM

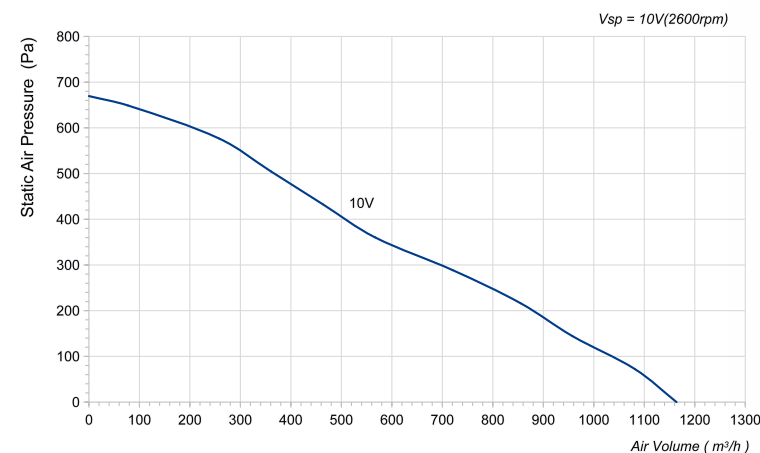


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G225-072NS-13	230	115	0.9	1185	670	2600	67
LWBE3G225-072NU-15	115	115	1.8	1185	670	2600	67

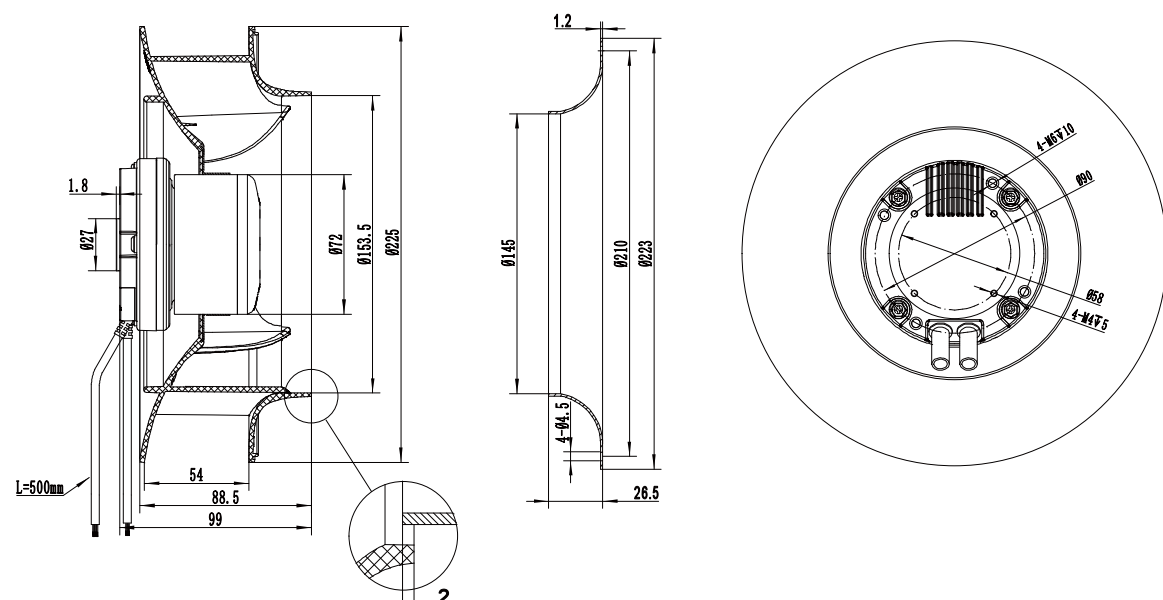

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBE-225 Serise

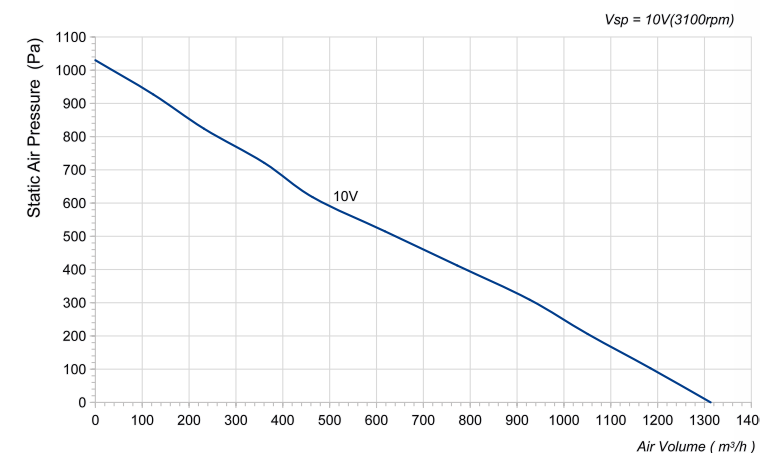


Product Characteristic

- Impeller Material: PA6+GF
- Direction of Rotation: Clockwise,seen on rotor
- Protection Class: IP55
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25 C ~ +60 C
- Technical Features: Control input 0-10VDC/PWM



Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G225-072NS-07	230	170	1.26	1313	1030	3100	70
LWBE3G225-072NU-16	115	170	2.52	1313	1030	3100	70

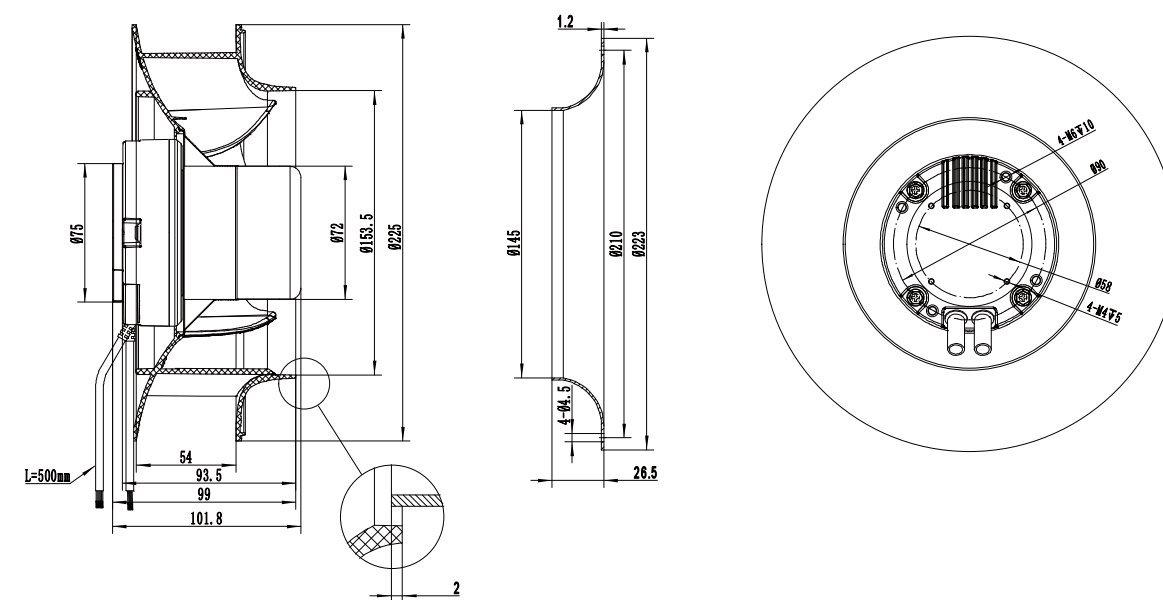

zakaz@ventilatorry.ru +7 (495) 133-95-09