


● Impeller Material:	PA6+GF
● Supply Voltage:	230V,50/60Hz
● Mode of Operation:	S1
● Protection Class:	IP55
● Insulation Class:	F
● Operation Temperature:	-25℃ ~+60℃
● Technical Feature:	Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.



Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G225-072PS-01	230	85	0.7	1009	618	2300	65

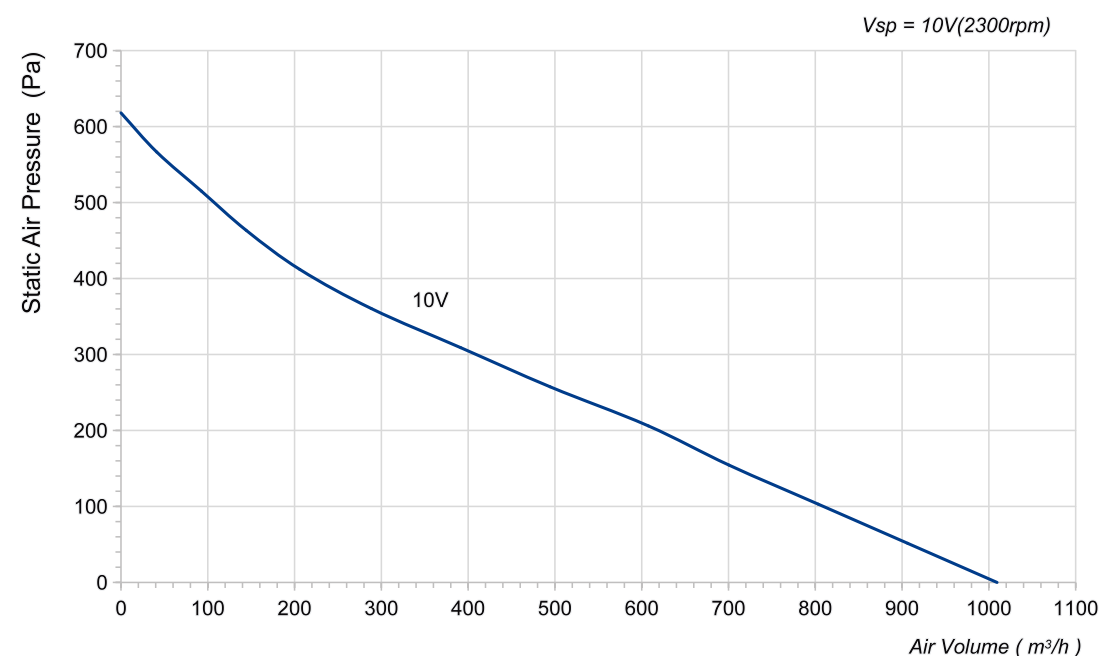

Technical drawing of a fire-rated door assembly, showing dimensions and components.

Side Elevation View:

- Overall height: 200 mm
- Overall width: 100 mm
- Handle height from bottom: 145 mm
- Door thickness: 1.2 mm
- Internal dimensions: 153.5 mm, 72 mm, 25 mm, 54 mm, 88.5 mm, 99 mm
- Door handle diameter: $\varnothing 27$
- Door handle height: 1.8 mm
- Door handle length: L=500 mm

Cross-section View:

- Overall height: 200 mm
- Overall width: 100 mm
- Door thickness: 1.2 mm
- Internal dimensions: 153.5 mm, 72 mm, 25 mm, 54 mm, 88.5 mm, 99 mm
- Door handle diameter: $\varnothing 27$
- Door handle height: 1.8 mm
- Door handle length: L=500 mm

Top View:

- Overall diameter: 100 mm
- Internal diameter: 80 mm
- Door handle diameter: $\varnothing 27$
- Door handle height: 1.8 mm
- Door handle length: L=500 mm

Detail View:

- Overall height: 200 mm
- Overall width: 100 mm
- Door thickness: 1.2 mm
- Internal dimensions: 153.5 mm, 72 mm, 25 mm, 54 mm, 88.5 mm, 99 mm
- Door handle diameter: $\varnothing 27$
- Door handle height: 1.8 mm
- Door handle length: L=500 mm

Technical drawings of the 1000mm x 1000mm square air conditioning unit. The drawings include a top view, a side view, and a bottom view. The top view shows a square unit with a central circular fan area and four mounting holes. The side view shows the unit's profile with dimensions 120.3, 124.3, and 132. The bottom view shows the unit's base with four mounting holes and a central circular area. Dimensions are provided in millimeters.