


LWBE-250 Serise




Product Characteristic

• Impeller Material:	Plastic PA66	• Supply Voltage:	230V,50/60Hz
• Direction of Rotation:	Clockwise,seen on rotor	• Mode of Operation:	S1
• Protection Class:	IP44	• Insulation Class:	F
• Mounting Position:	Horizontal or Vertical	• Operation Temperature:	-25 C ~+60 C
• Bearing:	Maintenance-free ball bearings	• Technical Features:	Control input 0-10VDC/PWM
• Protection:	Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start		

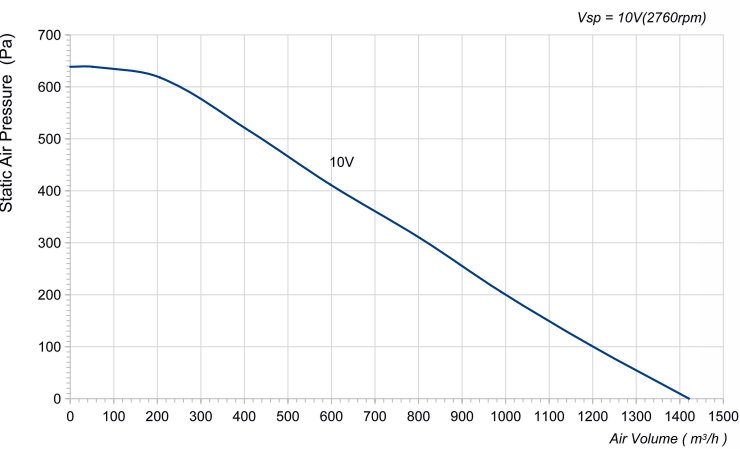


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-072NS-21	230	140	1.1	1421	639	2760	77

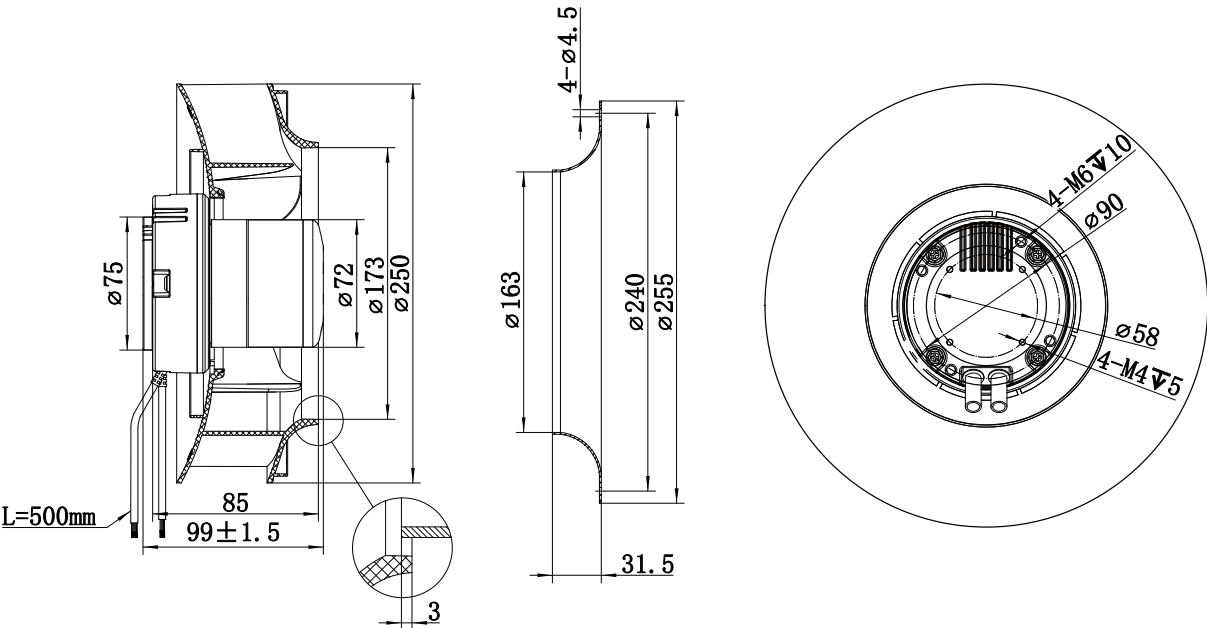

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBE-250 Serise

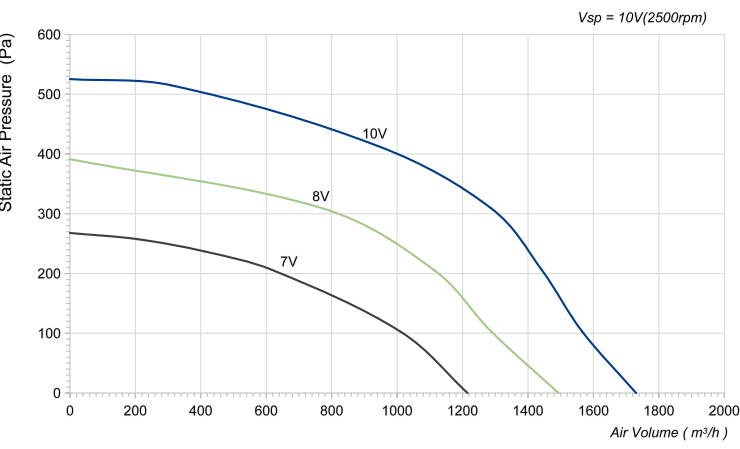


Product Characteristic

• Impeller Material:	Aluminum Alloy	• Supply Voltage:	230V,50/60Hz
• Direction of Rotation:	Clockwise,seen on rotor	• Mode of Operation:	S1
• Protection Class:	IP44	• Insulation Class:	B
• Mounting Rosition:	Horizontal or Vertical	• Operation Temperature:	-25 C ~+60 C
• Bearing:	Maintenance-free ball bearings	• Technical Features:	Control input 0-10VDC/PWM
• Protection:	Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start		



Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-092NS-22	230	145	1	1730	525	2500	74

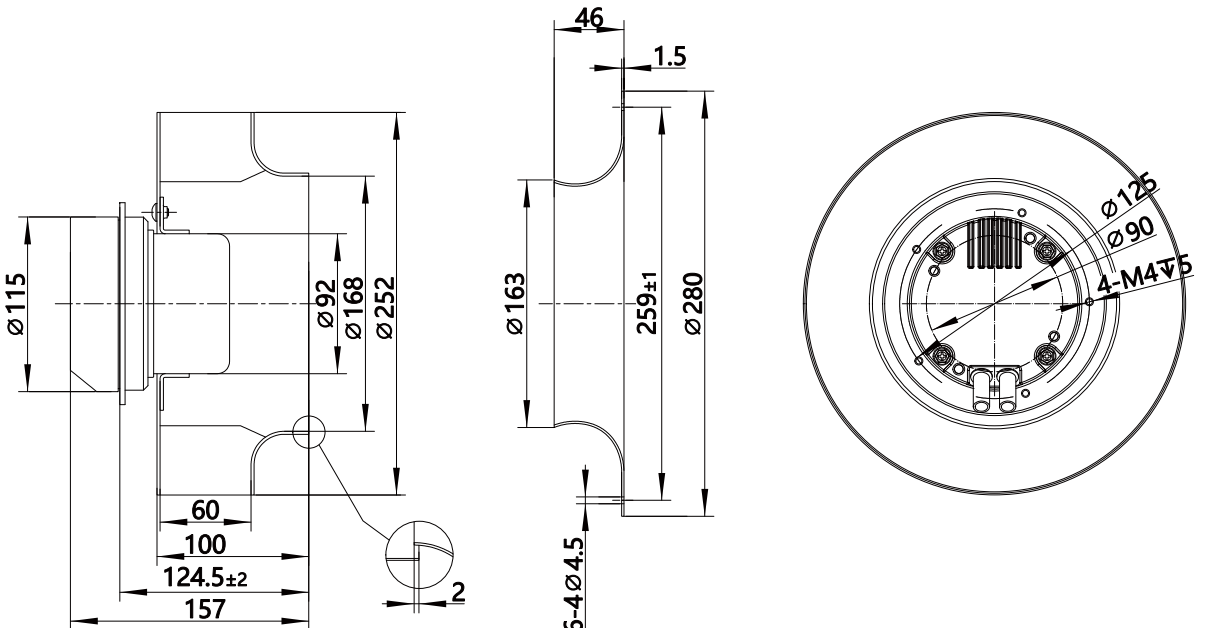

zakaz@ventilatorry.ru +7 (495) 133-95-09