


LWBE-250 Serise




Product Characteristic

- | | |
|---|---|
| • Impeller Material: Plastic PA66 | • Supply Voltage: 230V,50/60Hz |
| • Direction of Rotation: Clockwise,seen on rotor | • Mode of Operation: S1 |
| • Protection Class: IP44 | • Insulation Class: B |
| • Mounting Position: Horizontal or Vertical | • Operation Temperature: -25 C ~+60 C |
| • Bearing: Maintenance-free ball bearings | • Technical Features: Control input 0-10VDC/PWM |
| • Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start | |

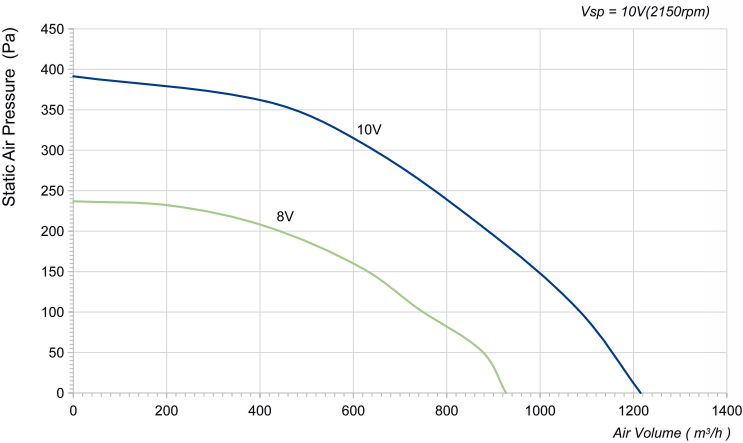


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-072NS-29	230	90	0.8	1215	391	2150	68

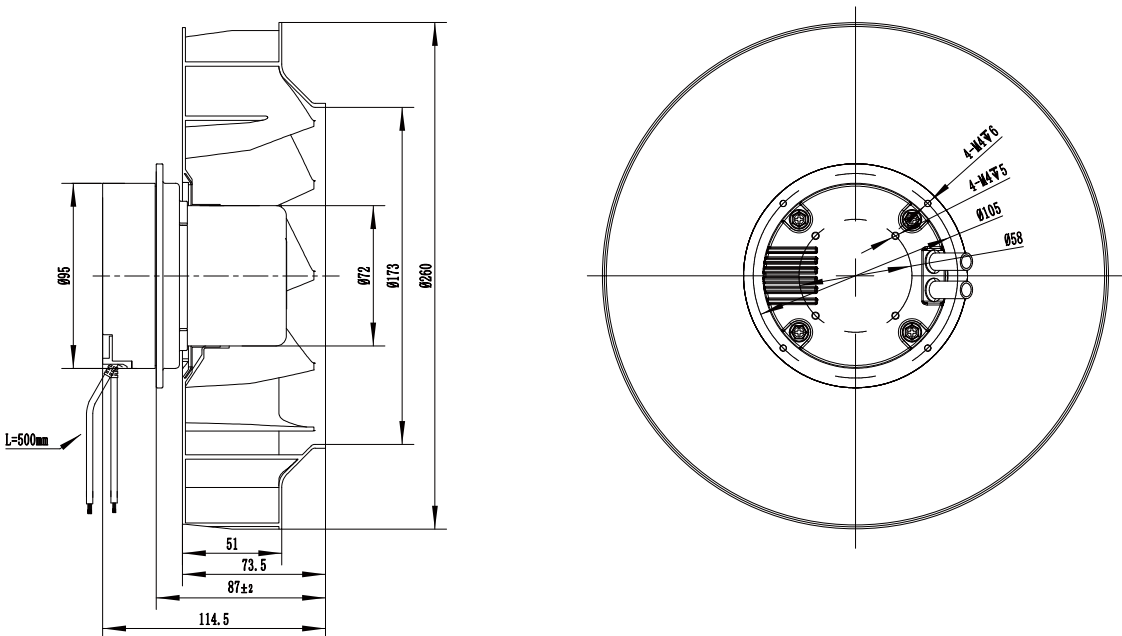

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBE-250 Serise

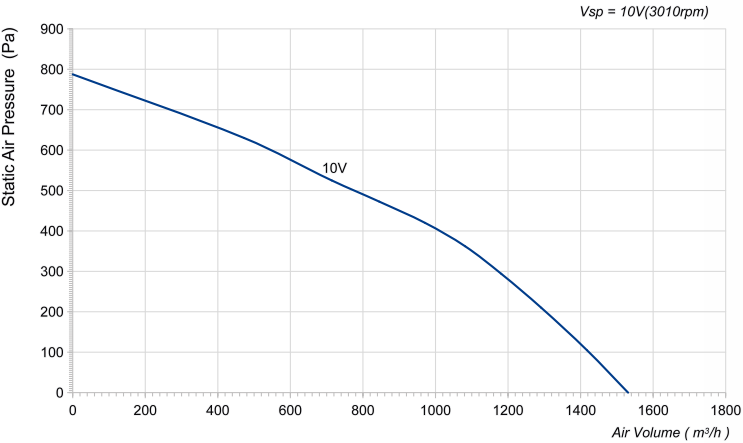


Product Characteristic

- | | |
|---|---|
| • Impeller Material: Plastic PA66 | • Supply Voltage: 230V,50/60Hz |
| • Direction of Rotation: Clockwise,seen on rotor | • Mode of Operation: S1 |
| • Protection Class: IP54 | • Insulation Class: F |
| • Mounting Position: Horizontal or Vertical | • Operation Temperature: -25 C ~+60 C |
| • Bearing: Maintenance-free ball bearings | • Technical Features: Control input 0-10VDC/PWM |
| • Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start | |



Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-092NS-12	230	140	0.6	1531	785	3010	72.1

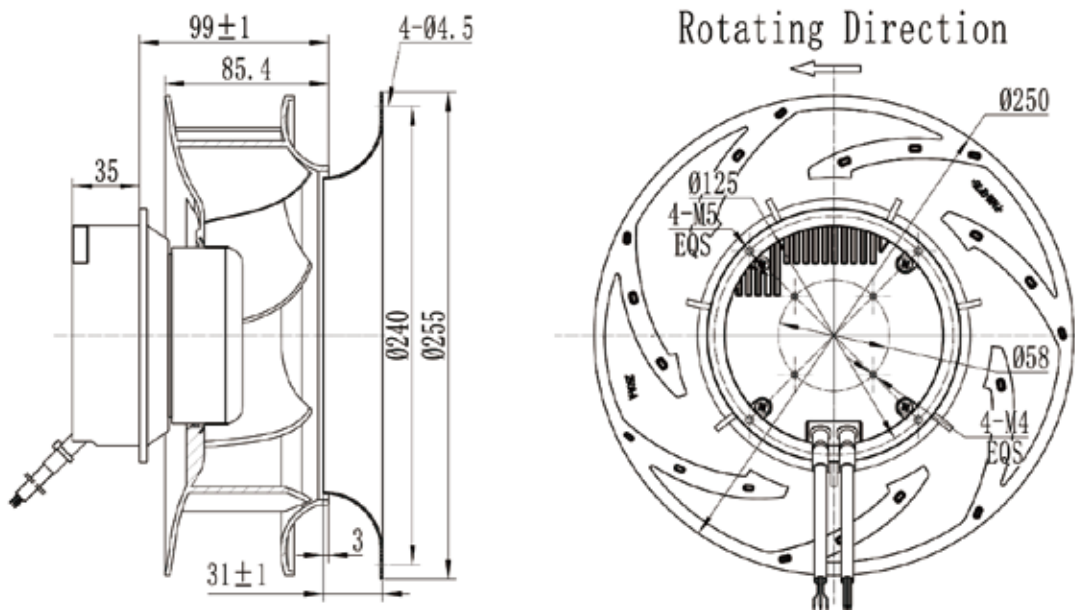

zakaz@ventilatorry.ru +7 (495) 133-95-09