


LWBE-250 Serise




Product Characteristic

- |                          |                                                                                         |                          |                           |
|--------------------------|-----------------------------------------------------------------------------------------|--------------------------|---------------------------|
| • Impeller Material:     | Aluminum Alloy                                                                          | • Supply Voltage:        | 230V,50/60Hz              |
| • Direction of Rotation: | Clockwise,seen on rotor                                                                 | • Mode of Operation:     | S1                        |
| • Protection Class:      | IP55                                                                                    | • Insulation Class:      | F                         |
| • Mounting Position:     | Horizontal or Vertical                                                                  | • Operation Temperature: | -25 C ~ +60 C             |
| • Bearing:               | Maintenance-free ball bearings                                                          | • Technical Features:    | Control input 0-10VDC/PWM |
| • Protection:            | Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start |                          |                           |

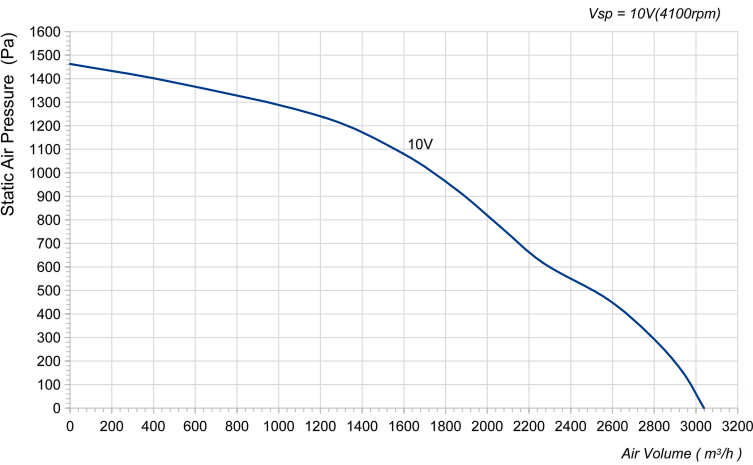


Technical Specifications

| Model              | Voltage (V) | Input Power (W) | Current (A) | Air Volume (m³/h) | Static Pressure (Pa) | Speed (RPM) | Noise [dB(A)] |
|--------------------|-------------|-----------------|-------------|-------------------|----------------------|-------------|---------------|
| LWBE3G250-102NS-20 | 230         | 750             | 3.4         | 3039              | 1442                 | 4100        | 93            |

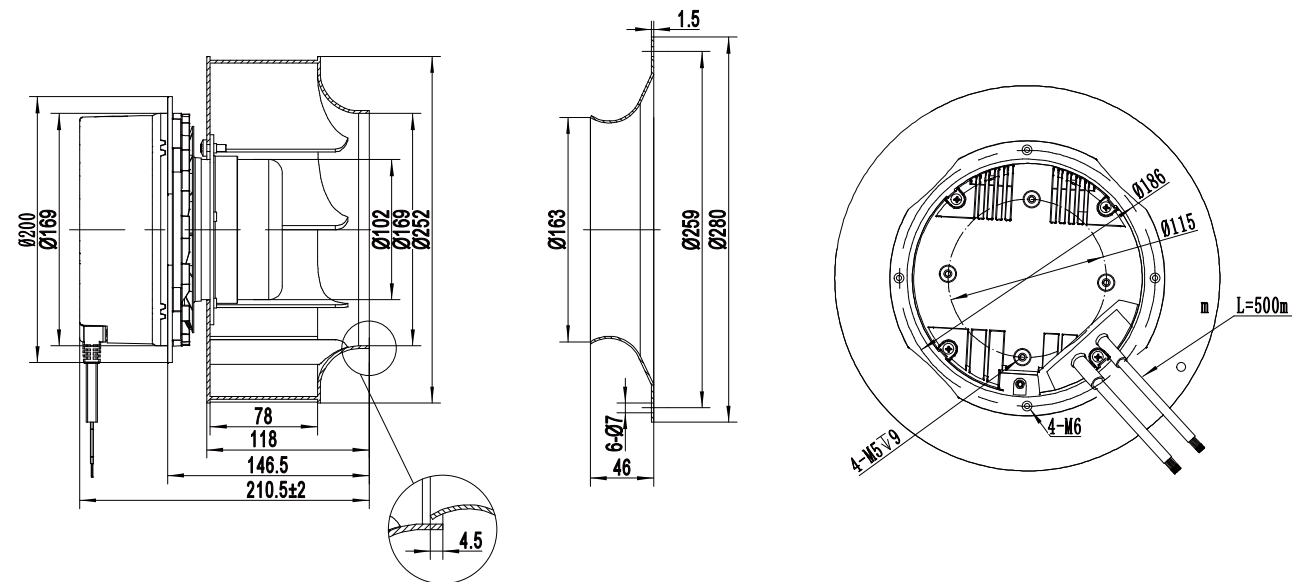

LWBE-250 Serise

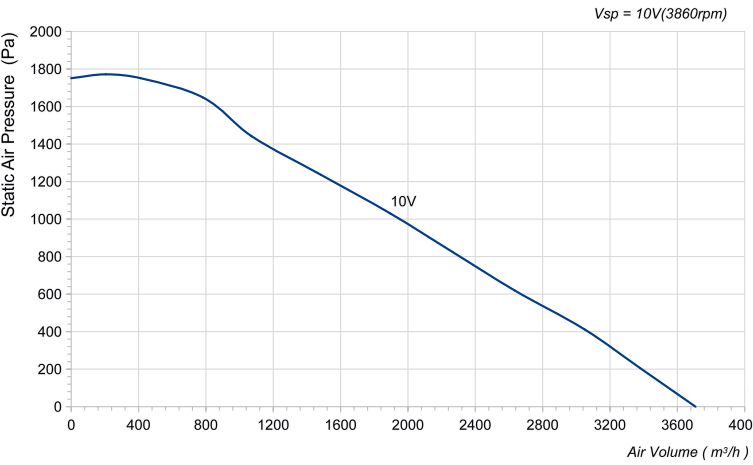

Product Characteristic

- |                          |                                                                                         |                          |                           |
|--------------------------|-----------------------------------------------------------------------------------------|--------------------------|---------------------------|
| • Impeller Material:     | Aluminum Alloy                                                                          | • Supply Voltage:        | 400V,50/60Hz              |
| • Direction of Rotation: | Clockwise,seen on rotor                                                                 | • Mode of Operation:     | S1                        |
| • Protection Class:      | IP55                                                                                    | • Insulation Class:      | F                         |
| • Mounting Position:     | Horizontal or Vertical                                                                  | • Operation Temperature: | -25 C ~ +60 C             |
| • Bearing:               | Maintenance-free ball bearings                                                          | • Technical Features:    | Control input 0-10VDC/PWM |
| • Protection:            | Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start |                          |                           |



Technical Specifications

| Model              | Voltage (V) | Input Power (W) | Current (A) | Air Volume (m³/h) | Static Pressure (Pa) | Speed (RPM) | Noise [dB(A)] |
|--------------------|-------------|-----------------|-------------|-------------------|----------------------|-------------|---------------|
| LWBE3G250-102NT-21 | 400         | 1000            | 1.6         | 3708              | 1751                 | 3860        | 92            |

