


LWBE-280 Serise




Product Characteristic

- Impeller Material: Galvanised sheet steel
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP44
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 230V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: $-25^{\circ}\text{C} \sim +60^{\circ}\text{C}$
- Technical Features: Control input 0-10VDC/PWM

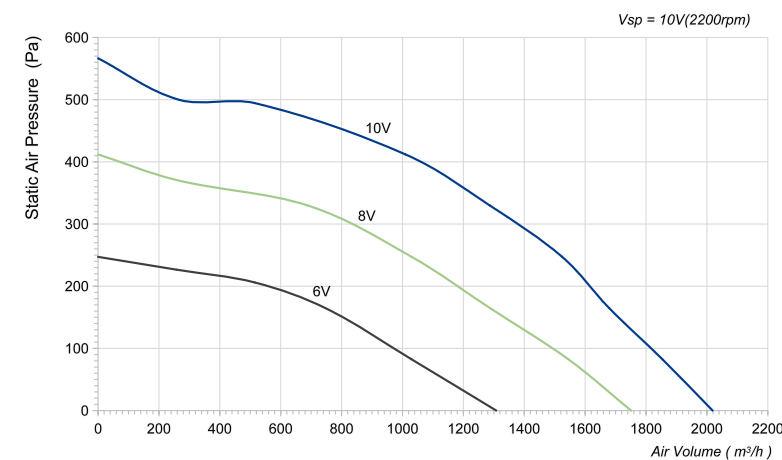


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-092NS-17	230	180	1.35	2019	546	2200	72

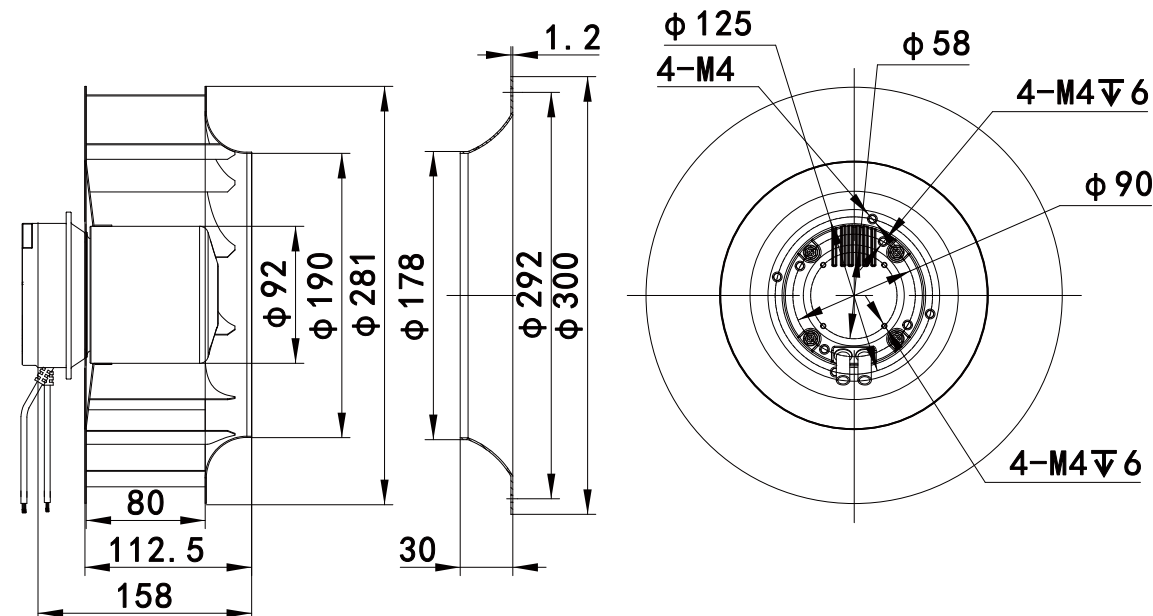

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBE-280 Serise

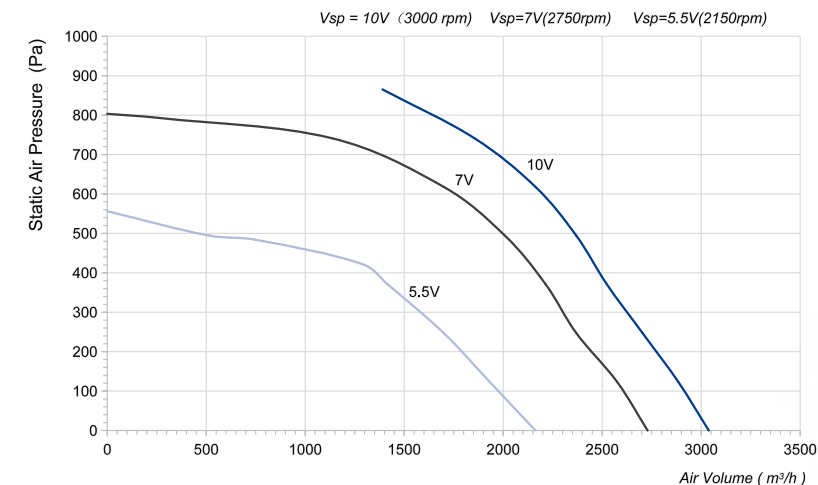


Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP44
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 400V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: $-25^{\circ}\text{C} \sim +60^{\circ}\text{C}$
- Technical Features: Control input 0-10VDC/PWM



Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-138NT-03	400	860	1.22	3028	886	3000	85

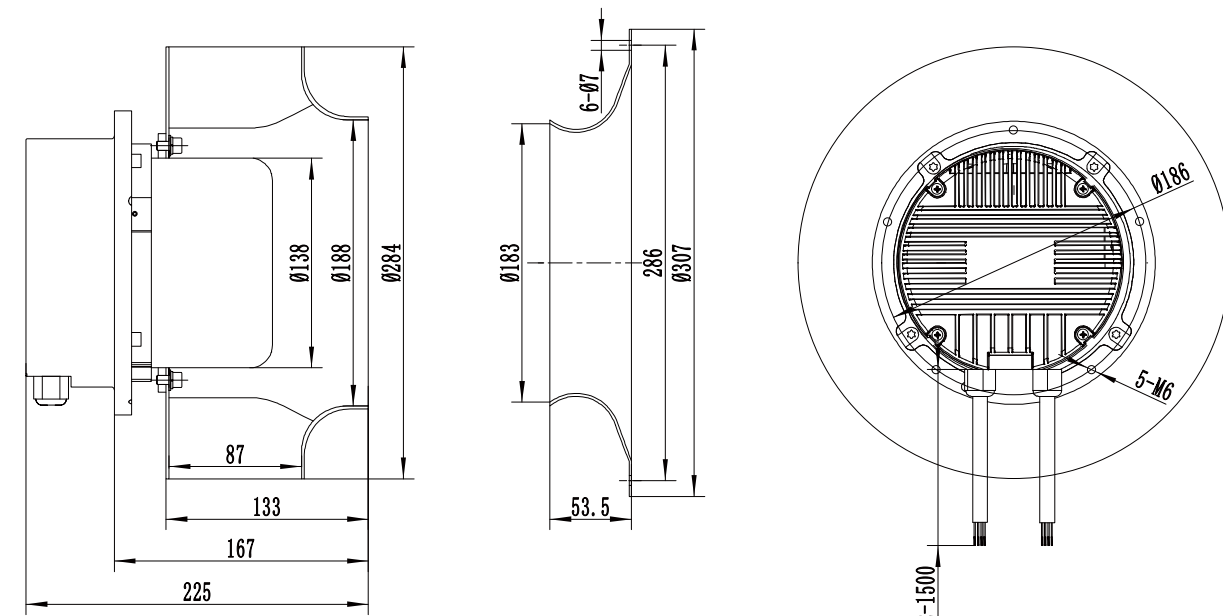

zakaz@ventilatorry.ru +7 (495) 133-95-09