


LWBE-280 Serise




Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Protection Class: IP55
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25 C ~ +60 C
- Technical Features: Control input 0-10VDC/PWM

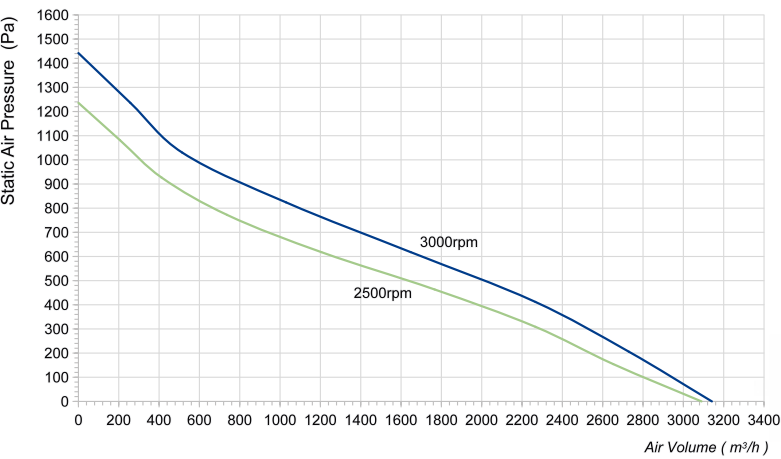


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-102NS-16	230	500	2.3	3193	1442	3000	75
LWBE3G280-102NU-22	115	400	3.5	3090	1236	2500	71

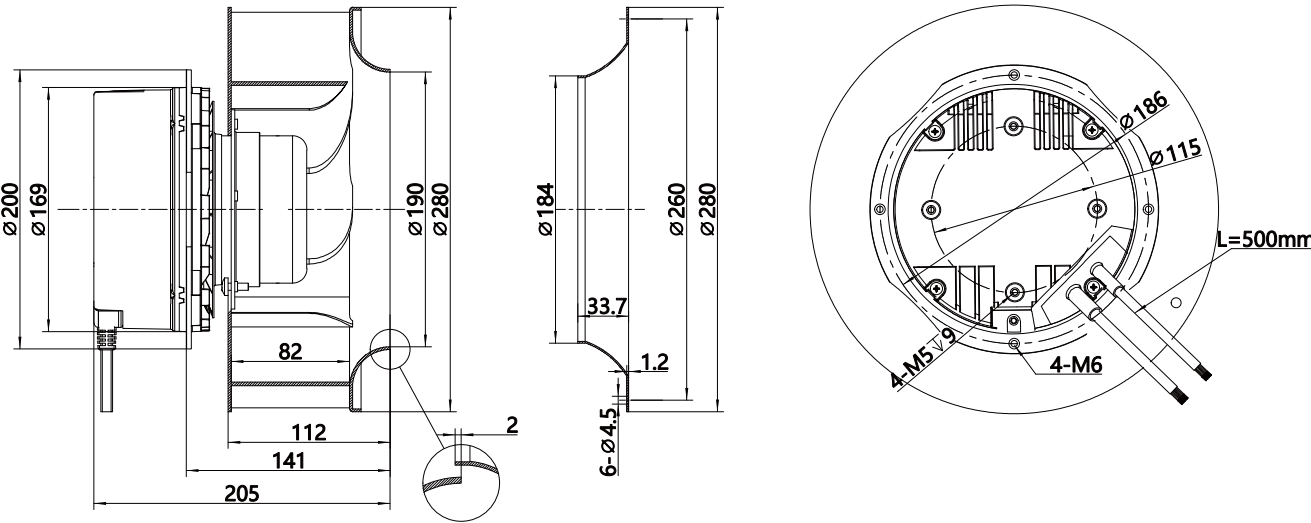

LWBE-280 Serise

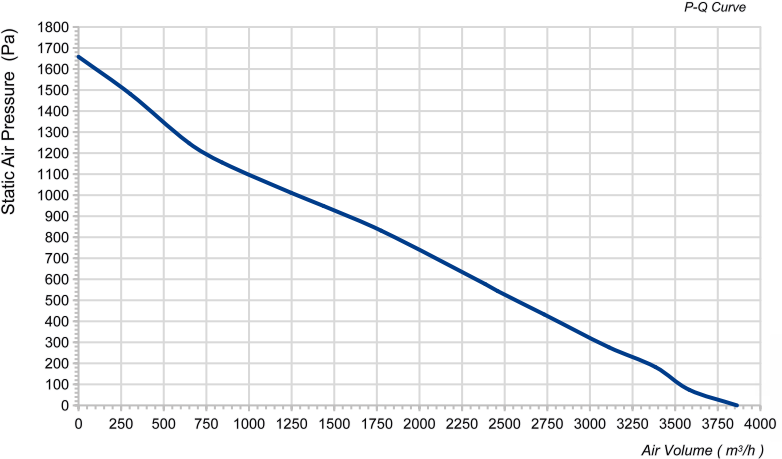

Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Protection Class: IP55
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25 C ~ +60 C
- Technical Features: Control input 0-10VDC/PWM



Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-102NS-06	230	700	3.1	3863	1658	3270	85

