


LWBE-310 Serise




Product Characteristic

- | | | | |
|--------------------------|---|--------------------------|---------------------------|
| • Impeller Material: | Aluminum Alloy | • Supply Voltage: | 230V,50/60Hz |
| • Direction of Rotation: | Clockwise,seen on rotor | • Mode of Operation: | S1 |
| • Protection Class: | IP55 | • Insulation Class: | F |
| • Mounting Position: | Horizontal or Vertical | • Operation Temperature: | -25 C ~ +60 C |
| • Bearing: | Maintenance-free ball bearings | • Technical Features: | Control input 0-10VDC/PWM |
| • Protection: | Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start | | |

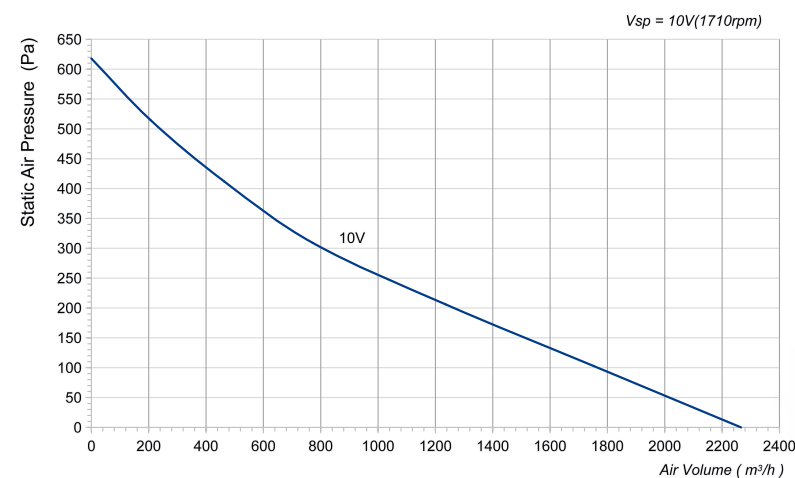


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-072NS-21	230	175	1.25	2266	618	1710	72

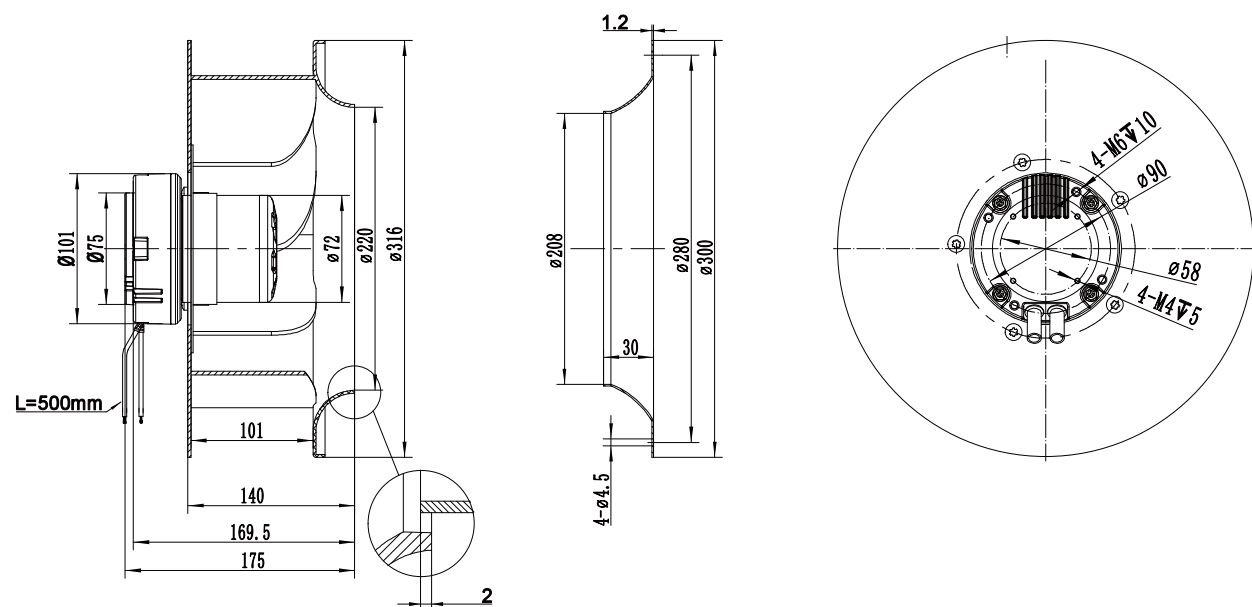

LWBE-310 Serise

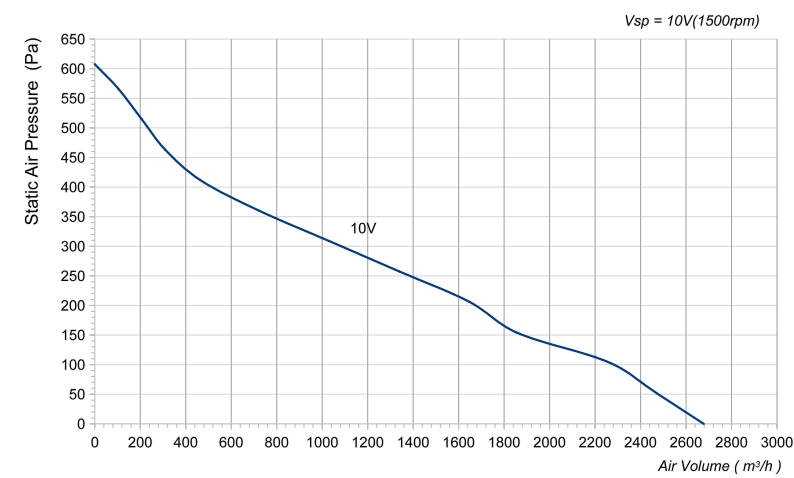

Product Characteristic

- | | | | |
|--------------------------|---|--------------------------|---------------------------|
| • Impeller Material: | Aluminum Alloy | • Supply Voltage: | 230V,50/60Hz |
| • Direction of Rotation: | Clockwise,seen on rotor | • Mode of Operation: | S1 |
| • Protection Class: | IP55 | • Insulation Class: | F |
| • Mounting Position: | Horizontal or Vertical | • Operation Temperature: | -25 C ~ +60 C |
| • Bearing: | Maintenance-free ball bearings | • Technical Features: | Control input 0-10VDC/PWM |
| • Protection: | Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start | | |



Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-092NS-22	230	175	1.3	2678	608	1500	63
LWBE3G310-092NU-28	115	175	2.6	2678	608	1500	63

