


LWBE-310 Serise





Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP44
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 230V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25 °C ~ +60 °C
- Technical Features: Control input 0-10VDC/PWM

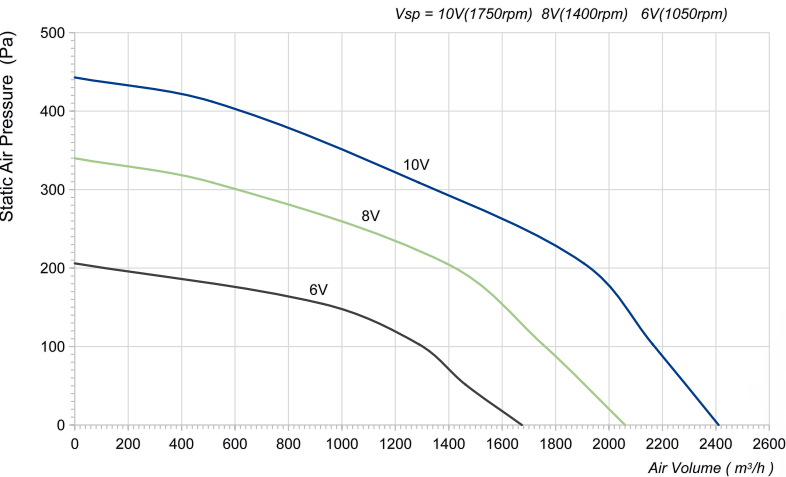


Technical Specifications

| Model              | Voltage (V) | Input Power (W) | Current (A) | Air Volume (m³/h) | Static Pressure (Pa) | Speed (RPM) | Noise [dB(A)] |
|--------------------|-------------|-----------------|-------------|-------------------|----------------------|-------------|---------------|
| LWBE3G310-092NS-17 | 230         | 150             | 1.2         | 2410              | 443                  | 1750        | 75            |

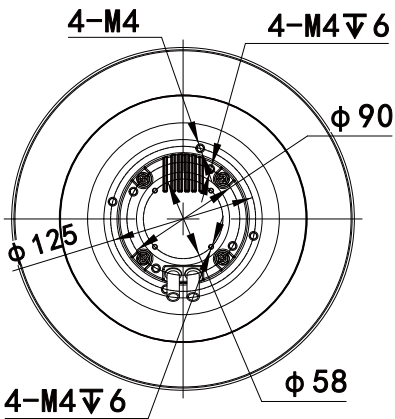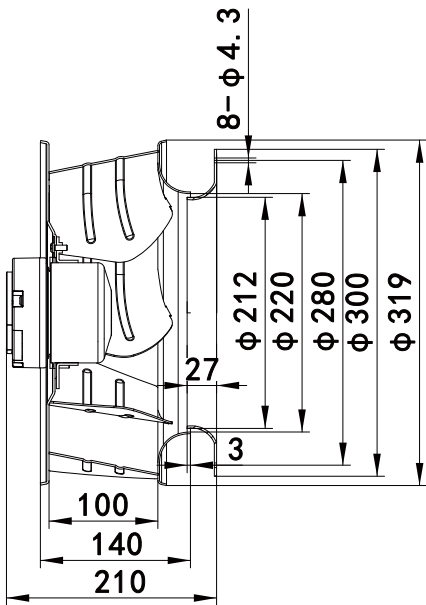

LWBE-310 Serise

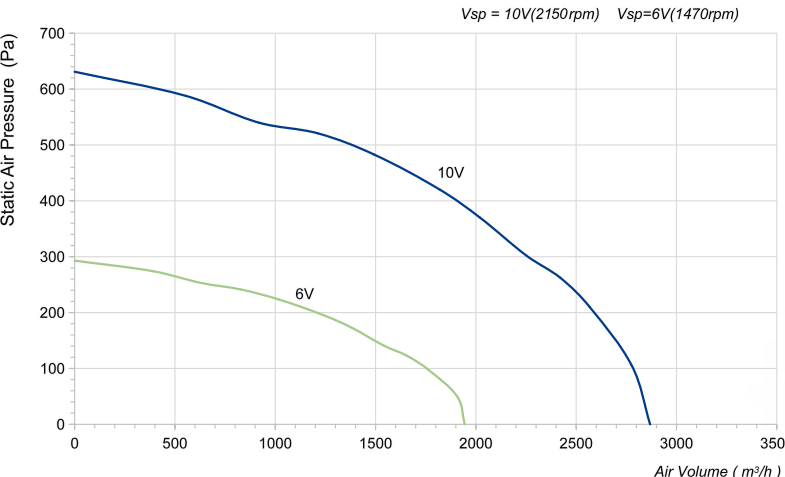

Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP54
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 230V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25 °C ~ +60 °C
- Technical Features: Control input 0-10VDC/PWM



Technical Specifications

| Model              | Voltage (V) | Input Power (W) | Current (A) | Air Volume (m³/h) | Static Pressure (Pa) | Speed (RPM) | Noise [dB(A)] |
|--------------------|-------------|-----------------|-------------|-------------------|----------------------|-------------|---------------|
| LWBE3G310-102NS-16 | 230         | 285             | 1.57        | 2869              | 630                  | 2150        | 70            |

