


LWBE-310 Serise




Product Characteristic

- | | | | |
|--------------------------|---|--------------------------|---------------------------|
| • Impeller Material: | Aluminum Alloy | • Supply Voltage: | 230V,50/60Hz |
| • Direction of Rotation: | Clockwise,seen on rotor | • Mode of Operation: | S1 |
| • Protection Class: | IP55 | • Insulation Class: | F |
| • Mounting Position: | Horizontal or Vertical | • Operation Temperature: | -25 C ~+60 C |
| • Bearing: | Maintenance-free ball bearings | • Technical Features: | Control input 0-10VDC/PWM |
| • Protection: | Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start | | |

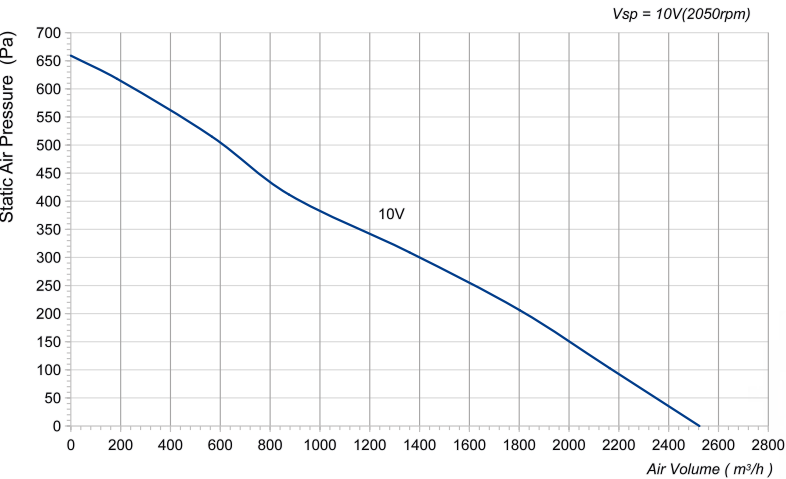


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-092NS-23	230	220	1.55	2524	670	2050	66
LWBE3G310-092NU-29	115	220	3.1	2524	670	2050	66

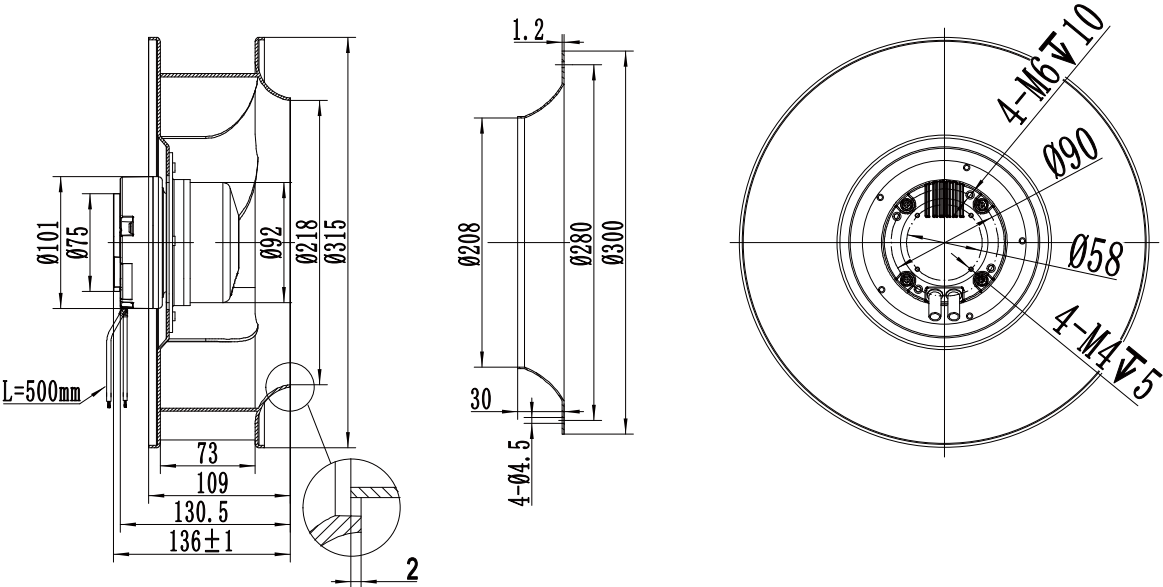

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBE-310 Serise

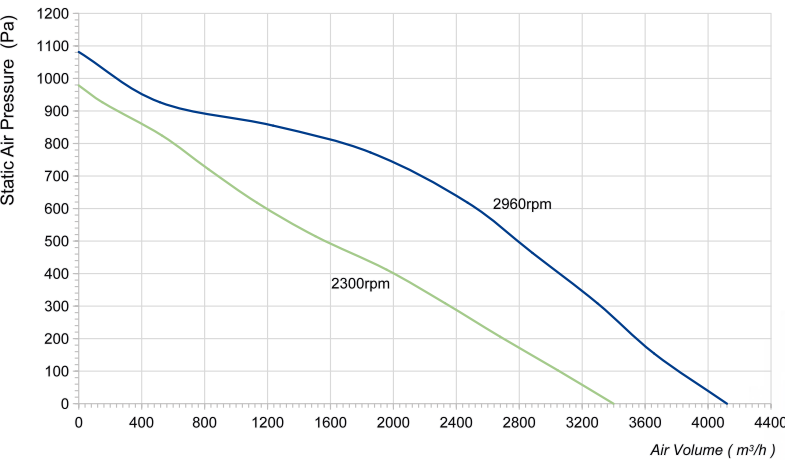


Product Characteristic

- | | | | |
|--------------------------|---|--------------------------|---------------------------|
| • Impeller Material: | Aluminum Alloy | • Supply Voltage: | 230V,50/60Hz |
| • Direction of Rotation: | Clockwise,seen on rotor | • Mode of Operation: | S1 |
| • Protection Class: | IP55 | • Insulation Class: | F |
| • Mounting Position: | Horizontal or Vertical | • Operation Temperature: | -25 C ~+60 C |
| • Bearing: | Maintenance-free ball bearings | • Technical Features: | Control input 0-10VDC/PWM |
| • Protection: | Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start | | |



Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-102NS-09	230	700	3.1	4120	1082	2960	85
LWBE3G310-102NU-30	115	400	3.6	3399	979	2300	70

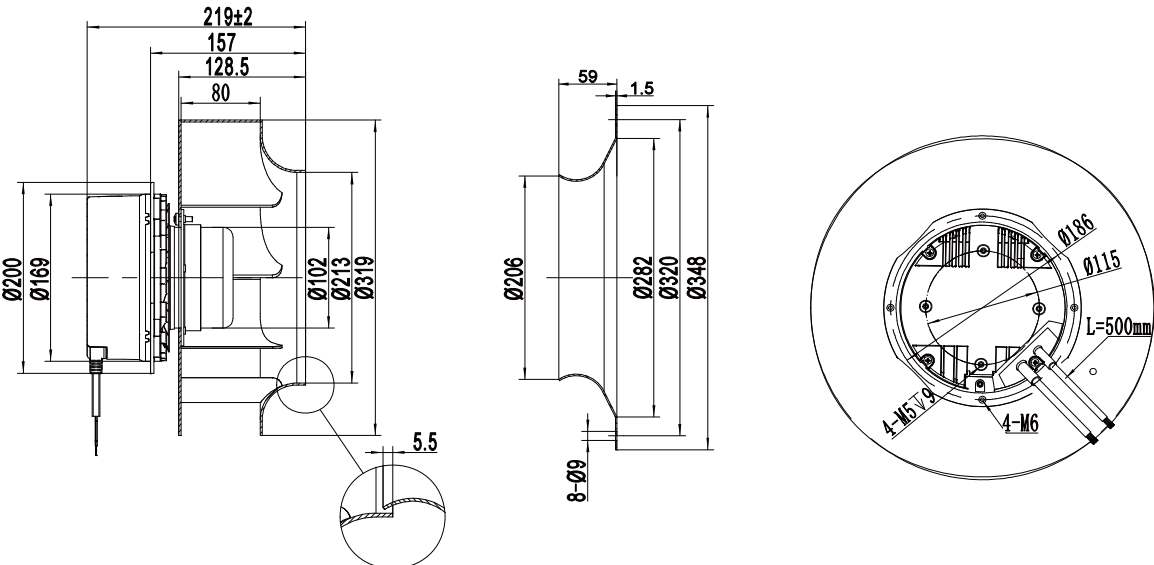

zakaz@ventilatorry.ru +7 (495) 133-95-09