


LWBE-355 Serise




Product Characteristic

- | | | | |
|--------------------------|---|--------------------------|---------------------------|
| ● Impeller Material: | Aluminum Alloy | ● Supply Voltage: | 230V,50/60Hz |
| ● Direction of Rotation: | Clockwise,seen on rotor | ● Mode of Operation: | S1 |
| ● Protection Class: | IP44 | ● Insulation Class: | B |
| ● Mounting Position: | Horizontal or Vertical | ● Operation Temperature: | -25 C ~+60 C |
| ● Bearing: | Maintenance-free ball bearings | ● Technical Features: | Control input 0-10VDC/PWM |
| ● Protection: | Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start | | |

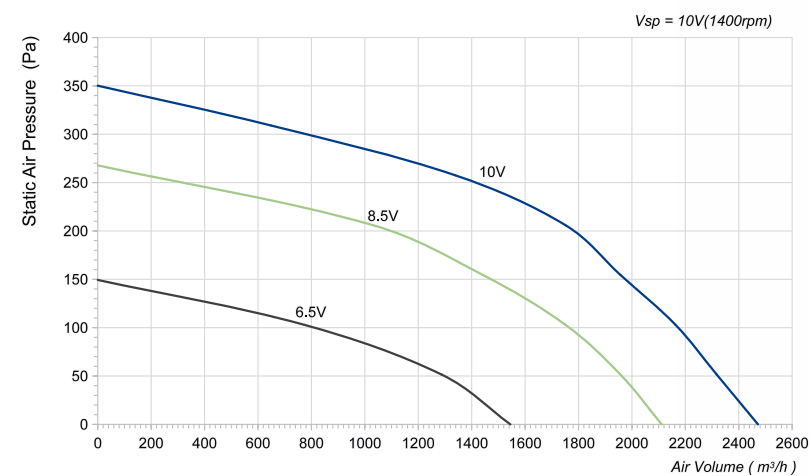


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G355-092NS-19	230	120	0.9	2472	350	1400	68

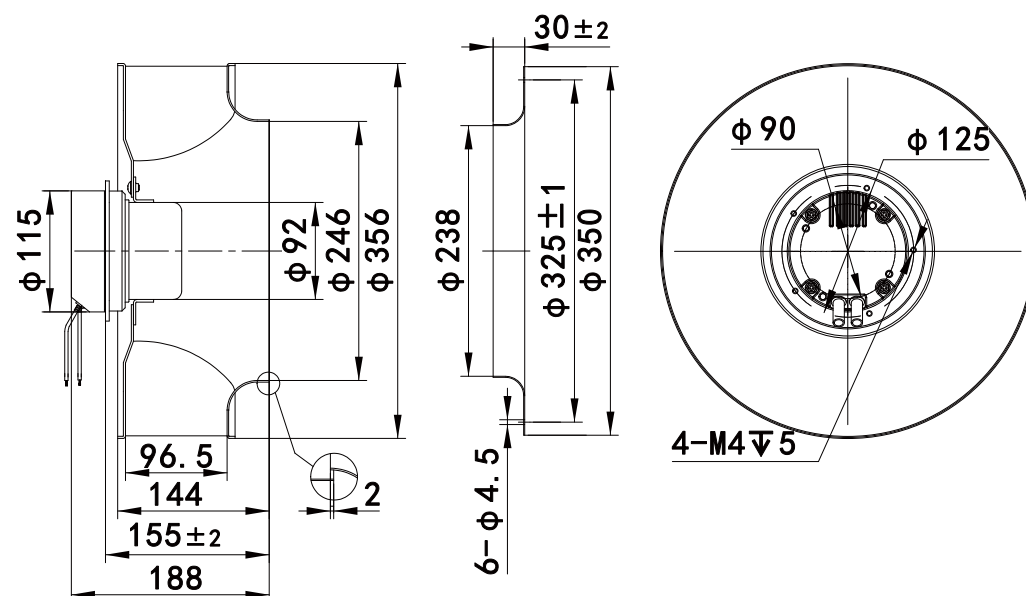

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBE-355 Serise

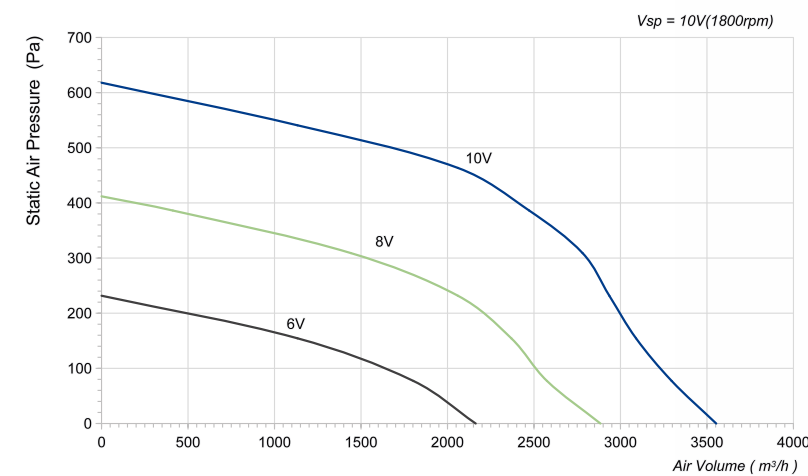


Product Characteristic

- | | | | |
|--------------------------|---|--------------------------|---------------------------|
| ● Impeller Material: | Aluminum Alloy | ● Supply Voltage: | 230V,50/60Hz |
| ● Direction of Rotation: | Clockwise,seen on rotor | ● Mode of Operation: | S1 |
| ● Protection Class: | IP44 | ● Insulation Class: | F |
| ● Mounting Position: | Horizontal or Vertical | ● Operation Temperature: | -25 C ~+60 C |
| ● Bearing: | Maintenance-free ball bearings | ● Technical Features: | Control input 0-10VDC/PWM |
| ● Protection: | Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start | | |



Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G355-102NS-20	230	285	2	3554	618	1800	76

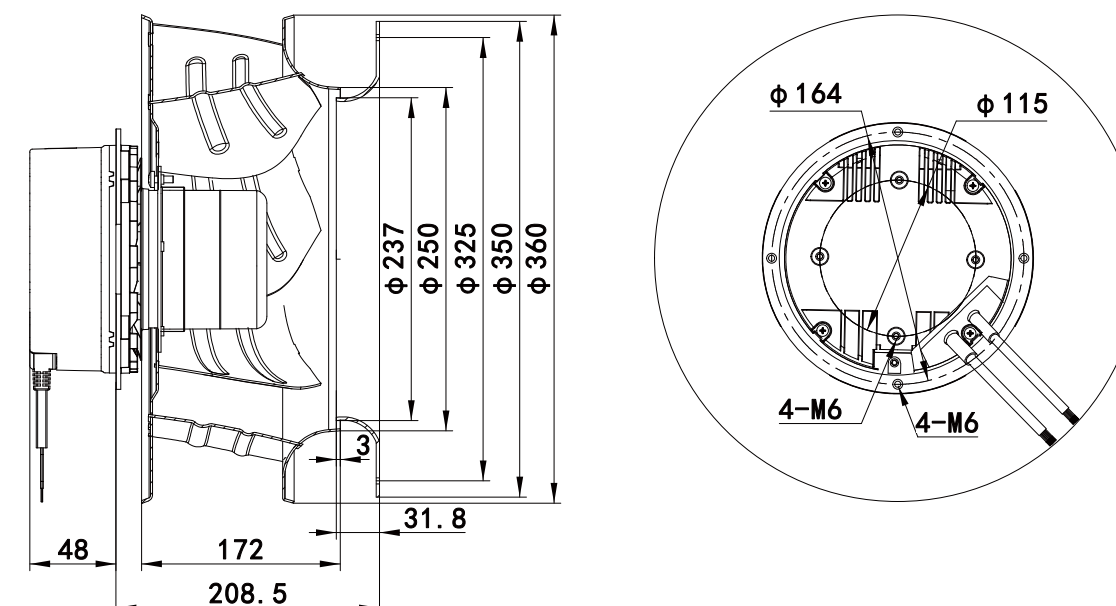

zakaz@ventilatorry.ru +7 (495) 133-95-09