


LWBE-355 Serise




Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Protection Class: IP55
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25 C ~+60 C
- Technical Features: Control input 0-10VDC/PWM

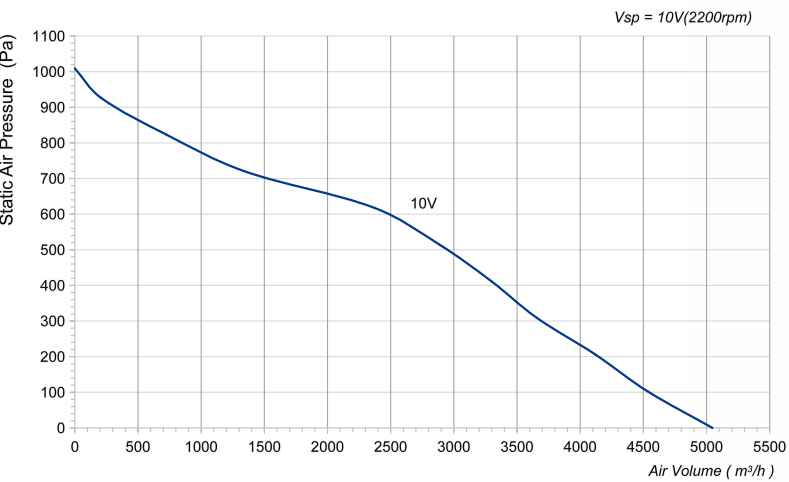


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G355-102NS-11	230	700	3.1	5047	1009	2200	85

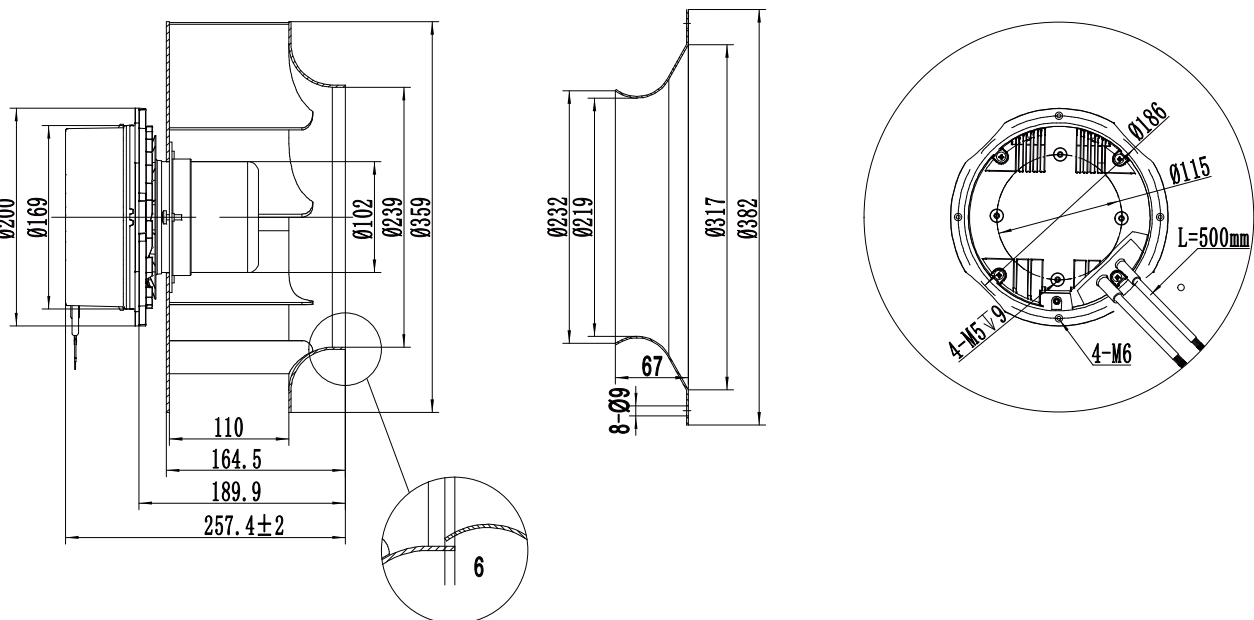

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBE-355 Serise

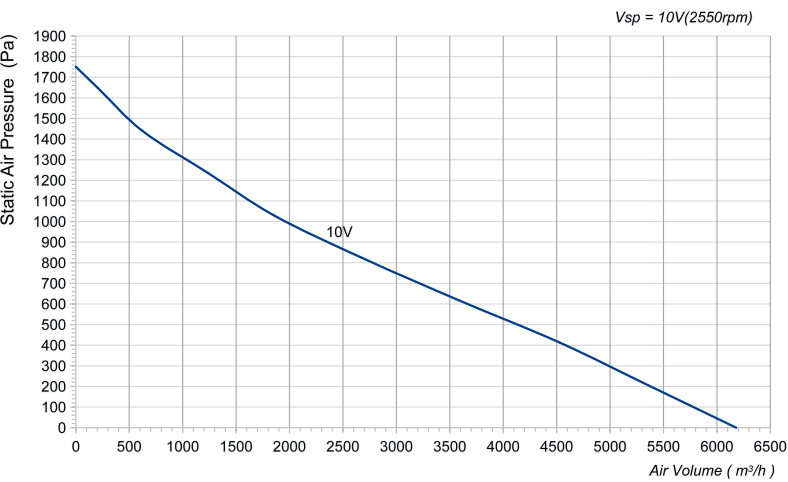


Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Protection Class: IP55
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start
- Supply Voltage: 400V,50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25 C ~+60 C
- Technical Features: Control input 0-10VDC/PWM



Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G355-102NT-25	400	1100	1.76	6180	1751	2550	86

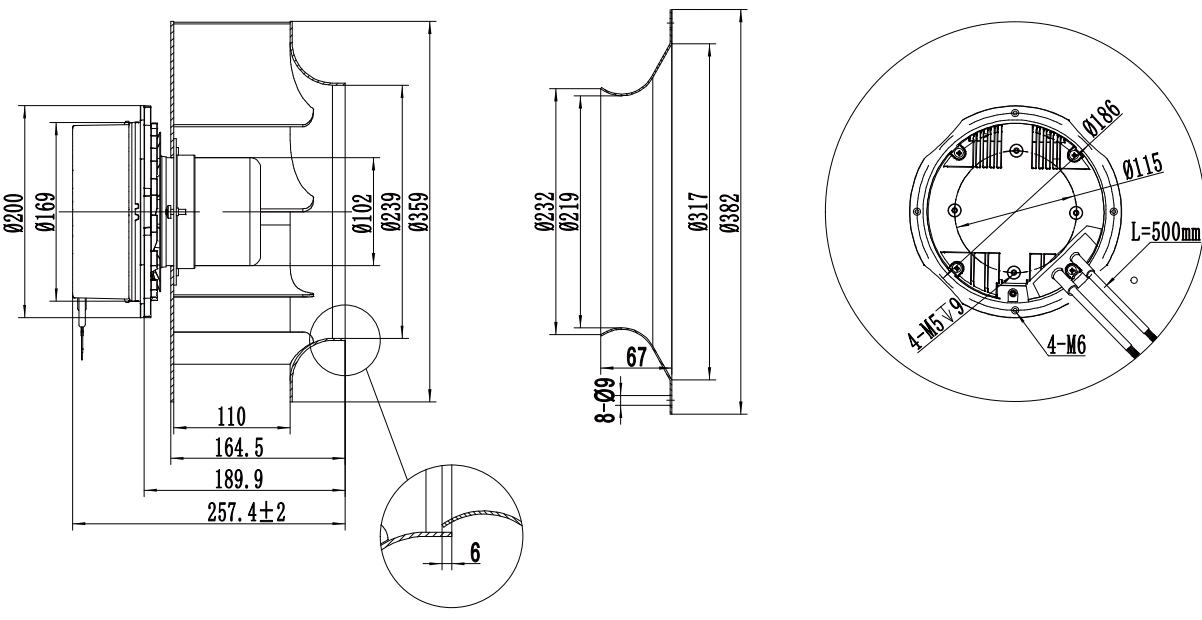

zakaz@ventilatorry.ru +7 (495) 133-95-09