


LWBE-560 Serise




Product Characteristic

• Impeller Material:	Aluminum Alloy	• Supply Voltage:	400V,50/60Hz
• Direction of Rotation:	Clockwise,seen on rotor	• Mode of Operation:	S1
• Protection Class:	IP54	• Insulation Class:	F
• Mounting Position:	Horizontal or Vertical	• Operation Temperature:	-25 C ~+60 C
• Bearing:	Maintenance-free ball bearings	• Technical Features:	Control input 0-10VDC/PWM
• Protection:	Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start		

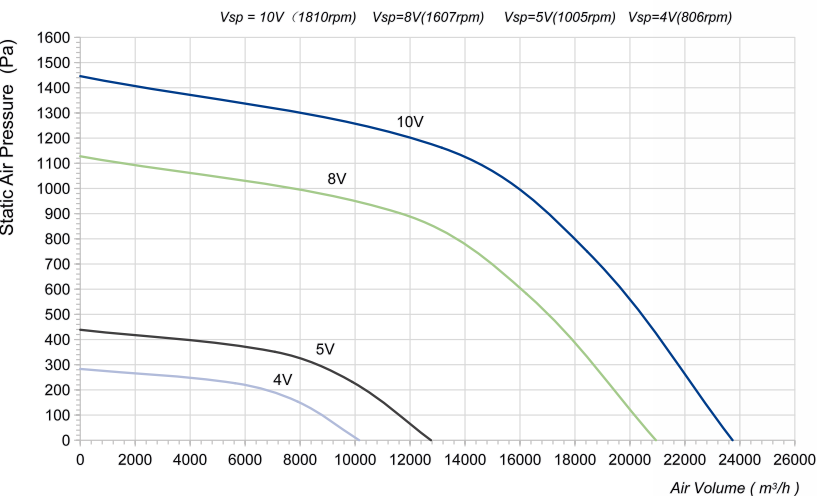


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G560-218NT-13	400	5600	9.5	23896	1442	1800	/

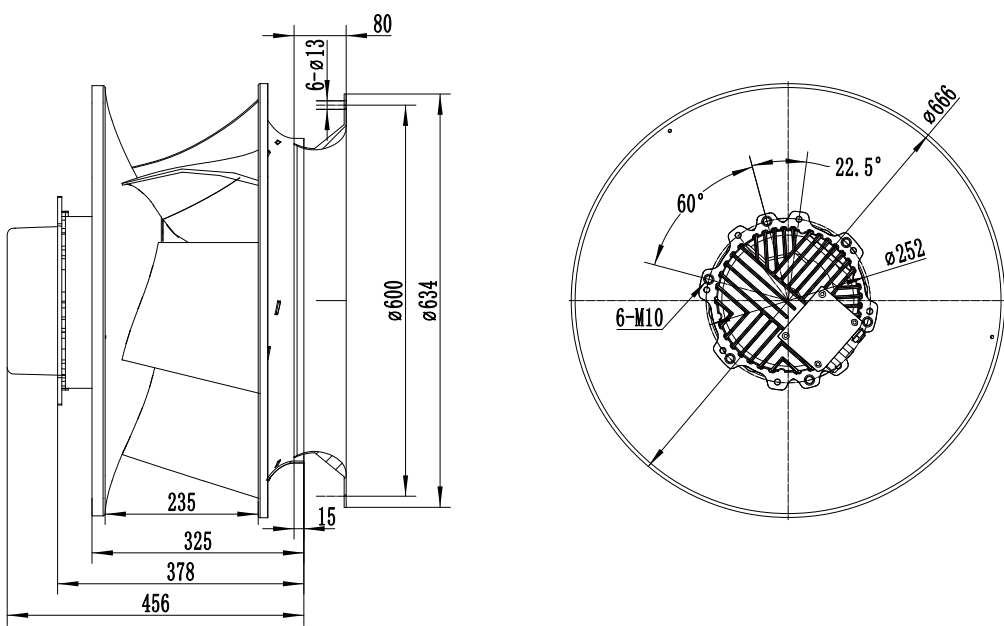

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBE-630 Serise

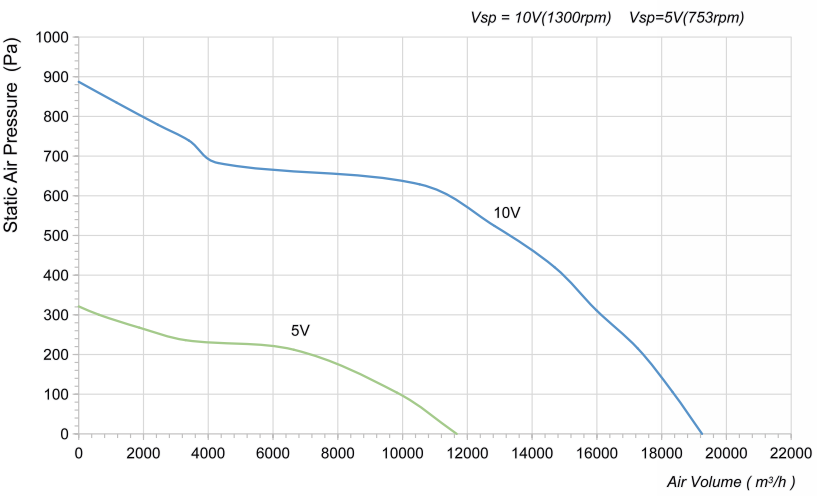


Product Characteristic

• Impeller Material:	Aluminum Alloy	• Supply Voltage:	400V,50/60Hz
• Direction of Rotation:	Clockwise,seen on rotor	• Mode of Operation:	S1
• Protection Class:	IP54	• Insulation Class:	F
• Mounting Position:	Horizontal or Vertical	• Operation Temperature:	-25 C ~+60 C
• Bearing:	Maintenance-free ball bearings	• Technical Features:	Control input 0-10VDC/PWM
• Protection:	Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start		



Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G630-188NT-06	400	2195	4.8	19247	887	1300	/

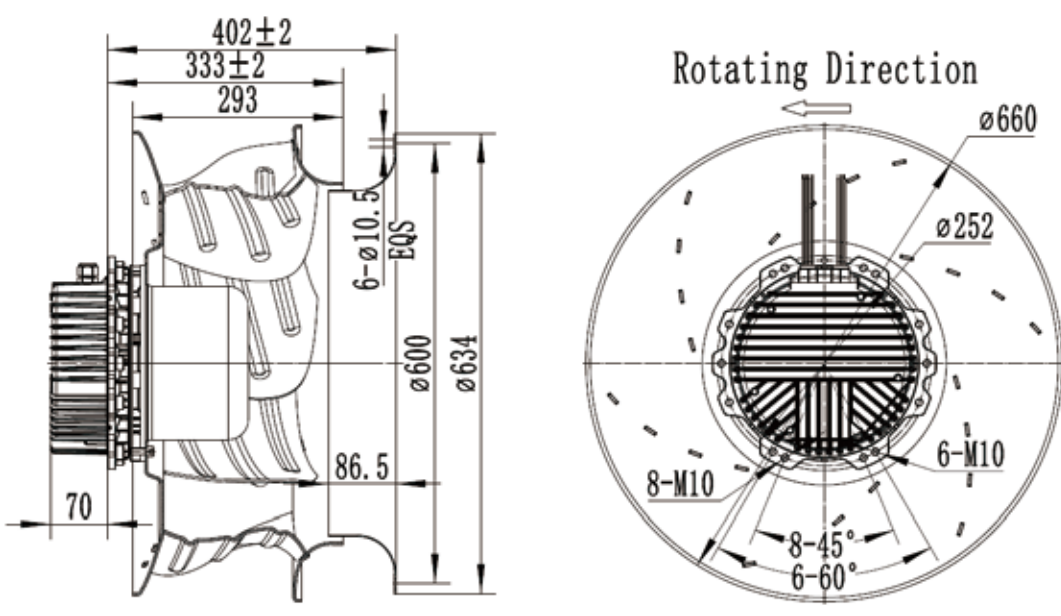

zakaz@ventilatorry.ru +7 (495) 133-95-09