






● Impeller Material:	Aluminum Alloy	● Supply Voltage:	400V,50/60Hz
● Direction of Rotation:	Clockwise,seen on rotor	● Mode of Operation:	S1
● Protection Class:	IP54	● Insulation Class:	F
● Mounting Position:	Horizontal or Vertical	● Operation Temperature:	-25 C ~ +60 C
● Bearing:	Maintenance-free ball bearings	● Technical Features:	Control input 0-10VDC/PWM
● Protection:	Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start		

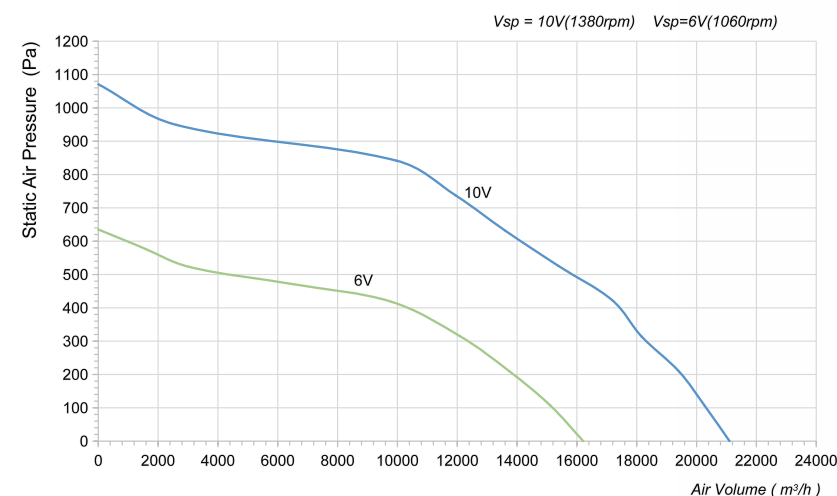

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G630-188NT-07	400	2955	6.5	21100	1071	1380	/

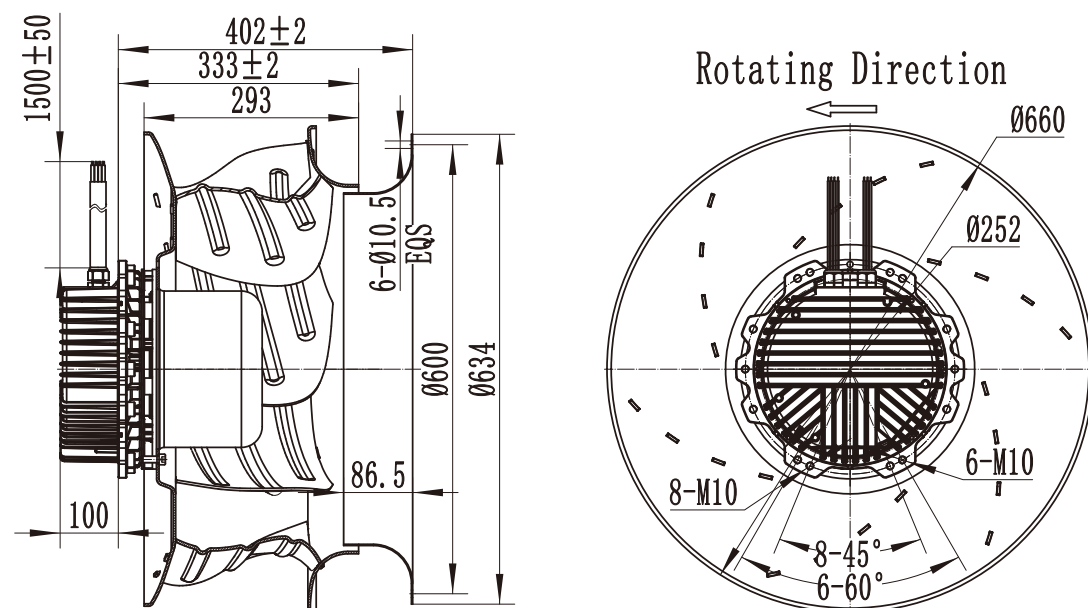


zakaz@ventilatorry.ru +7 (495) 133-95-09

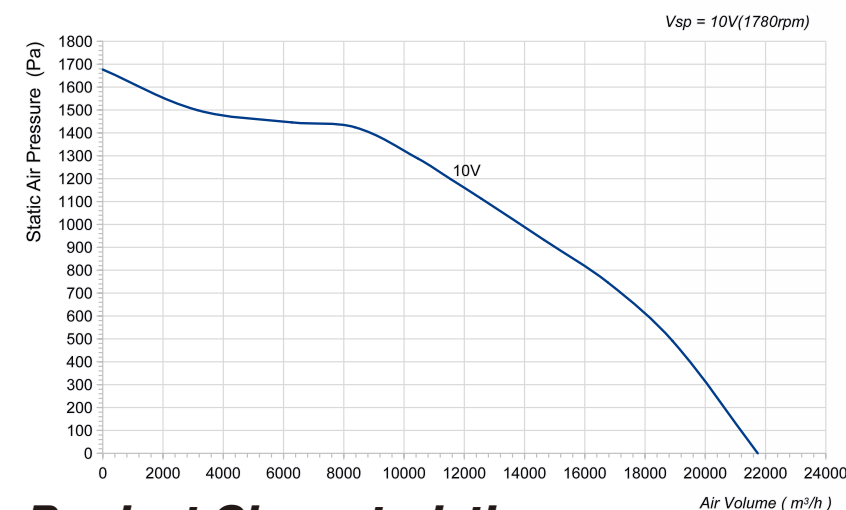

● Impeller Material:	Aluminum Alloy	● Supply Voltage:	400V,50/60Hz
● Direction of Rotation:	Clockwise,seen on rotor	● Mode of Operation:	S1
● Protection Class:	IP54	● Insulation Class:	F
● Mounting Position:	Horizontal or Vertical	● Operation Temperature:	-25 C ~ +60 C
● Bearing:	Maintenance-free ball bearings	● Technical Features:	Control input 0-10VDC/PWM
● Protection:	Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start		



Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G630-188NT-09	400	5600	8.1	21742	1677	1780	/

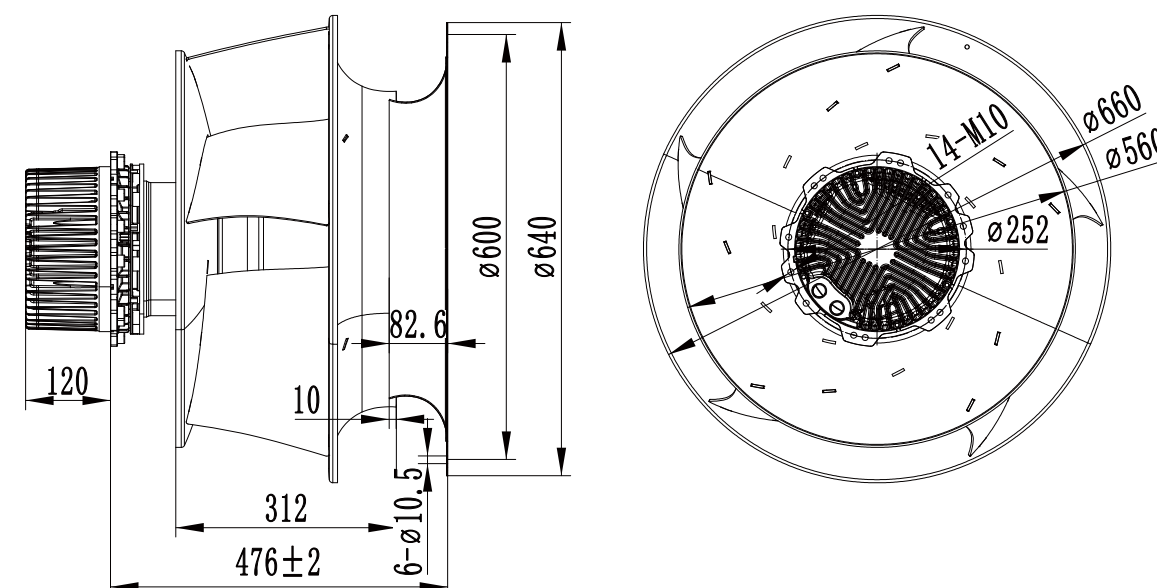

zakaz@ventilatorry.ru +7 (495) 133-95-09