


LWCA-110 Series


Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 °C ~ +60 °C

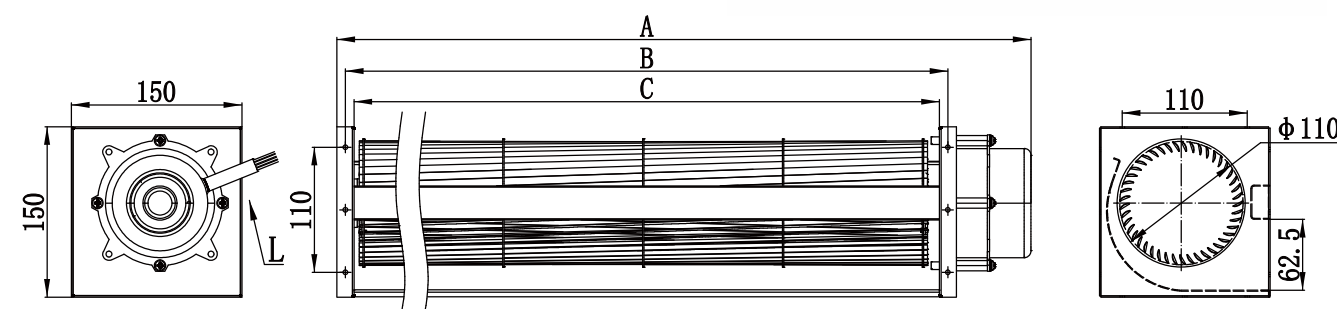

Technical Specifications


Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Frequency (Hz)	Power (W)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCA-110380SN-06	476	395	380	230	50	90	1250	128	900	61	Single
LWCA-110520SN-06	616	535	520	230	50	95	1250	162	1200	63	Single
LWCA-110620SN-06	716	635	620	230	50	100	1250	193	1350	66	Single
LYCA-110720SN-06	816	735	720	230	50	105	1250	224	1550	67	Single
LWCA-110820SN-06	916	835	820	230	50	115	1250	255	1750	68	Single

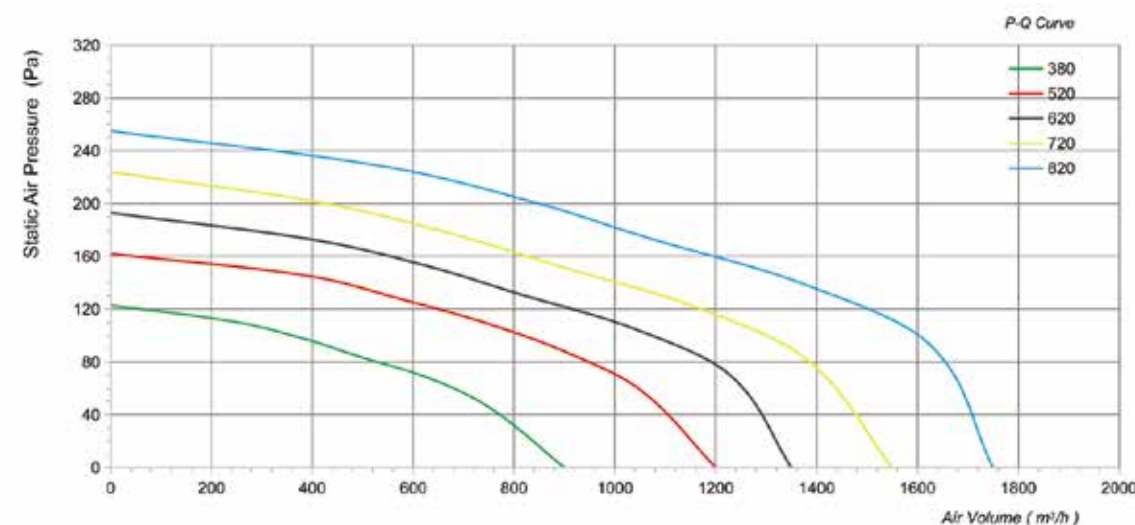

LWCA-120 Series

Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 °C ~ +60 °C

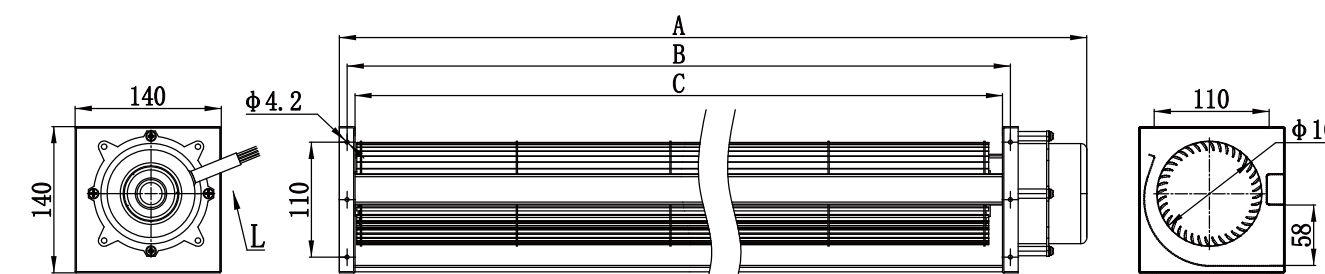

Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Frequency (Hz)	Power (W)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCA-120380SN-06	504	400	380	230	50	109	1350	68	1000	63	Single
LWCA-120560SN-06	684	580	560	230	50	120	1350	100	1380	65	Single
LWCA-120680SN-06	804	700	680	230	50	135	1350	122	1560	67	Single
LWCA-120780SN-06	904	800	780	230	50	150	1350	140	1780	71	Single
LWCA-120900SN-06	1024	920	900	230	50	170	1350	161	2000	72	Single

