


LWCA-43 Series

Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 °C ~ +60 °C

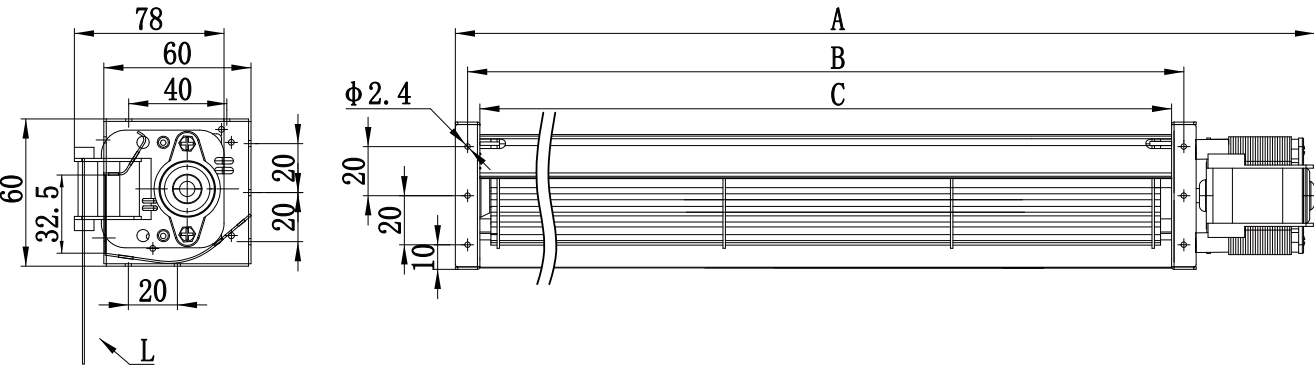


Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Frequency (Hz)	Power (W)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCA-4390UN-06	158	108	98	115	60	17	3000	22	48	37	Single
LWCA-4390SN-07	158	108	98	230	50	14	2700	18	41	37	Single
LWCA-43150UN-06	218	170	160	115	60	17	3000	22	72	38	Single
LWCA-43150SN-07	218	170	160	230	50	15	2500	16	61	38	Single
LWCA-43190UN-06	265	208	198	115	60	18	2900	22	86	39	Single
LWCA-43190SN-07	265	208	198	230	50	15	2400	14	70	38	Single
LWCA-43250UN-06	316	260	250	115	60	22	2800	21	110	39	Single
LWCA-43250SN-07	316	260	250	230	50	19	2500	15	90	38	Single
LWCA-43290UN-06	370	310	300	115	60	23	2800	21	135	40	Single
LWCA-43290SN-07	370	310	300	230	50	19	2300	11	115	37	Single
LWCA-43350UN-06	417	358	348	115	60	21	2700	19	150	41	Single
LWCA-43350SN-07	417	358	348	230	50	21	2400	15	130	39	Single
LWCA-43420UN-06	491	430	420	115	60	22	2600	20	170	42	Single
LWCA-43420SN-07	491	430	420	230	50	21	2300	21	163	40	Single

LWCA-45 Series

Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 °C ~ +60 °C

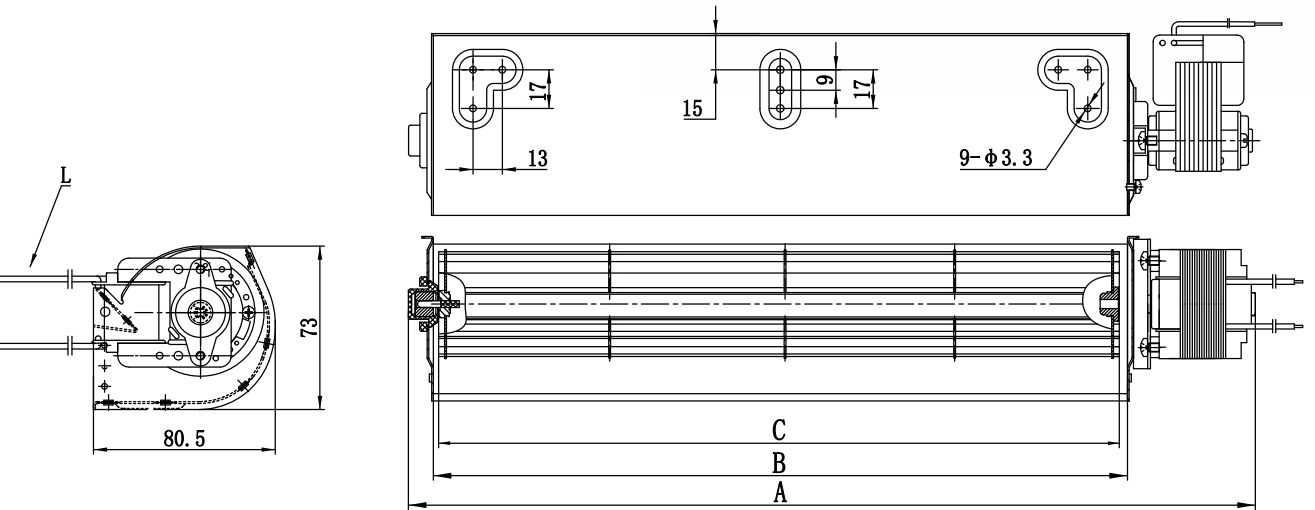

Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Frequency (Hz)	Power (W)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCA-45120SN-06	194	126	120	230	50	16	1700	22	69	35	Single
LWCA-45180SN-06	254	186	180	230	50	18	1700	23	103	35	Single
LWCA-45240SN-06	314	246	240	230	50	21	1700	24	138	36	Single
LWCA-45300SN-06	374	306	300	230	50	23	1700	25	172	36	Single
LWCA-45360SN-06	434	366	360	230	50	26	1700	25	207	37	Single