


LWCA-50 Series

Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃

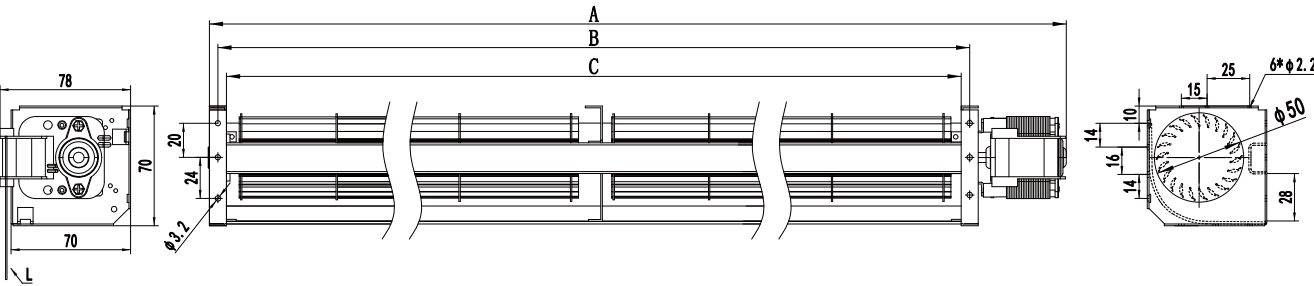



Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Frequency (Hz)	Power (W)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCA-50530SN-06	605	540	530	230	50	25	1800	34	288	42	Double
LWCA-50610SN-07	685	620	610	230	50	26	1800	35	332	42	Double
LWCA-50700SN-06	775	710	700	230	50	27	1800	36	381	43	Double
LWCA-50800SN-07	875	810	800	230	50	30	1800	38	427	43	Triple
LWCA-50854SN-06	929	864	854	230	50	31	1800	39	456	43	Triple
LWCA-50920SN-07	995	930	920	230	50	33	1800	40	492	44	Triple
LWCA-501055SN-06	1130	1065	1055	230	50	35	1800	42	564	44	Triple

LWCA-60 Series

Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃

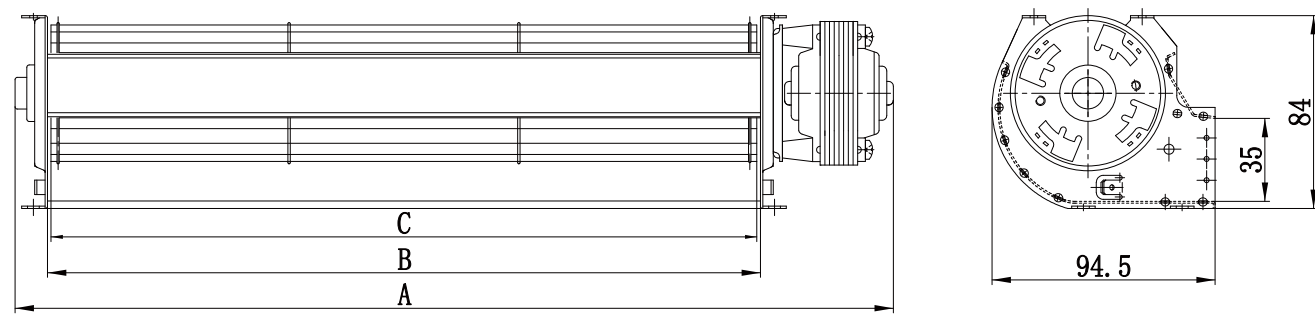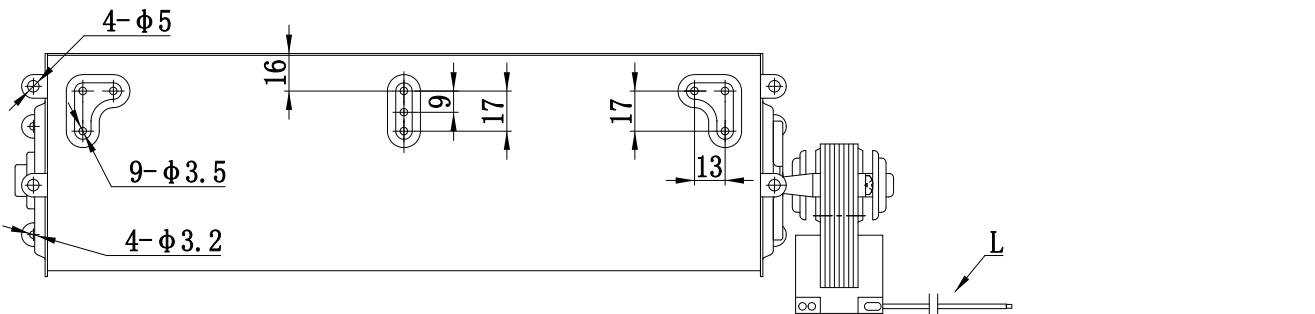

Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Frequency (Hz)	Power (W)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCA-60120SN-06	194	123	120	230	50	15	1700	57	113	44	Single
LWCA-60180SN-06	254	183	180	230	50	20	1700	58	170	46	Single
LWCA-60240SN-06	314	243	240	230	50	25	1700	59	227	46	Single
LWCA-60300SN-06	374	303	300	230	50	30	1700	61	284	47	Single
LWCA-60360SN-06	434	363	360	230	50	33	1700	62	340	48	Single
LWCA-60420SN-06	494	423	420	230	50	36	1700	63	397	49	Single
LWCA-60480SN-06	554	483	480	230	50	40	1700	64	454	50	Single