


LWCA-60 Series

Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃

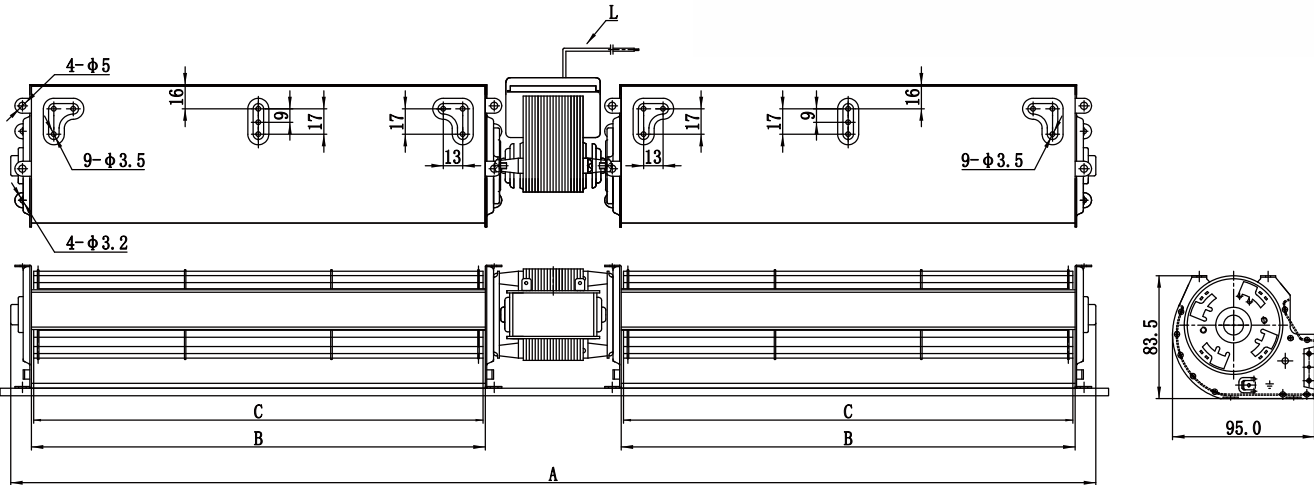


Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Frequency (Hz)	Power (W)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCA-60120SN-07	365	123	120	230	50	28	1700	63	212	47	Double
LWCA-60180SN-07	485	183	180	230	50	31	1700	64	318	48	Double
LWCA-60240SN-07	605	243	240	230	50	37	1700	66	423	49	Double
LWCA-60300SN-07	725	303	300	230	50	43	1700	60	529	50	Double

LWCA-80 Series

Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃

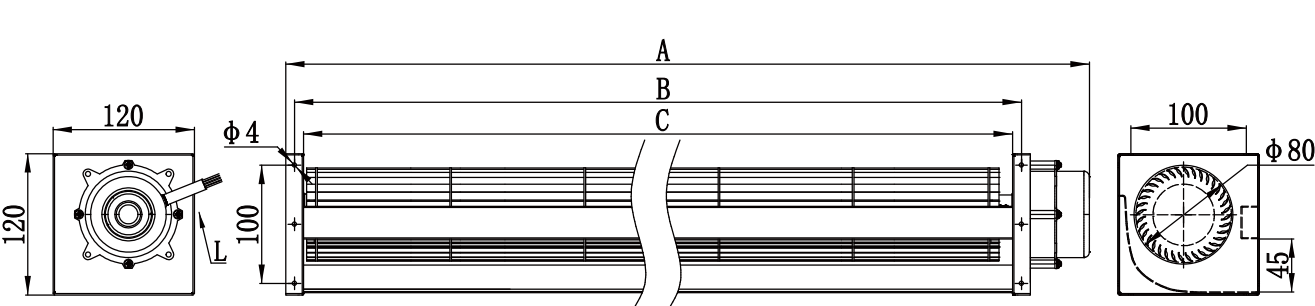

Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Frequency (Hz)	Power (W)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCA-80350SN-06	446	365	350	230	50	28	1350	36	360	51	Single
LWCA-80520SN-06	616	535	520	230	50	32	1350	53	580	53	Single
LWCA-80620SN-06	716	635	620	230	50	35	1350	63	700	54	Single
LWCA-80720SN-06	816	735	720	230	50	38	1350	73	780	55	Single
LWCA-80820SN-06	916	835	820	230	50	40	1350	82	880	56	Single

