


LWCD-110 Series


Product Characteristic

- Motor Type : 3 Phase BLDC Motor
- Housing Material : Steel+Aluminum Alloy
- Blade Material : Aluminum Alloy
- Insulation Class : B
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃

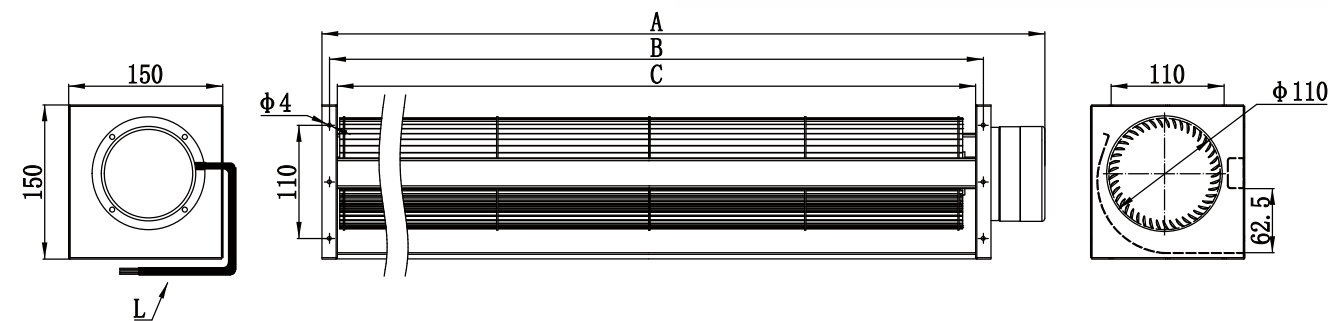

Technical Specifications


Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Power (W)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCD-110380MN-06	464	395	380	24	70	1200	141	881	55	Single
LWCD-110520MN-06	612	535	520	24	100	1200	202	1205	57	Single
LWCD-110620MN-06	712	635	620	24	120	1200	244	1437	57	Single
LWCD-110720MN-06	812	735	720	24	132	1200	278	1669	58	Single
LWCD-110820MN-06	912	835	820	24	146	1200	320	1845	59	Single

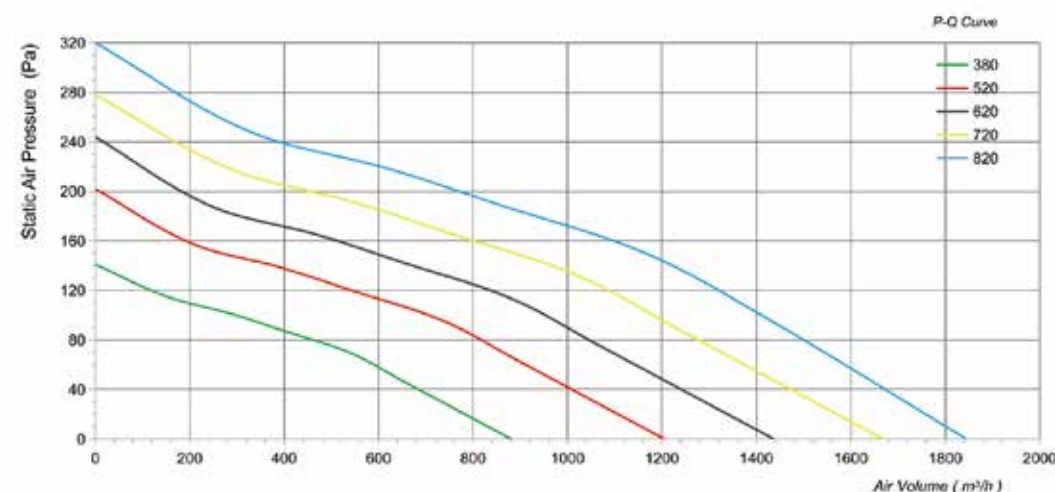

LWCD-120 Series

Product Characteristic

- Motor Type : 3 Phase BLDC Motor
- Housing Material : Steel+Aluminum Alloy
- Blade Material : Aluminum Alloy
- Insulation Class : B
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃

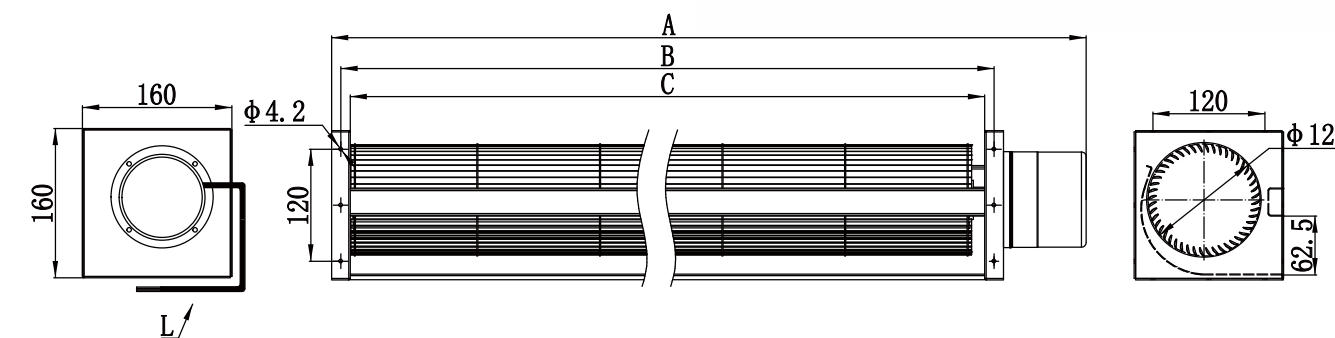

Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Power (W)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCD-120380MN-06	477	400	380	24	48	1350	68	900	56	Single
LWCD-120490MN-06	587	510	490	24	90	1350	88	1160	57	Single
LWCD-120560MN-06	657	580	560	24	110	1350	100	1350	57	Single
LWCD-120680MN-06	777	700	680	24	123	1350	122	1600	58	Single
LWCD-120780MN-06	916	800	780	24	144	1350	140	1900	60	Single

