


LWCD-45 Series

Product Characteristic

- Motor Type : 3 Phase BLDC Motor
- Housing Material : Steel+Aluminum Alloy
- Blade Material : Aluminum Alloy
- Insulation Class : B
- Bearing Type: Ball bearing
- Operation Temperature : - 25 °C ~ +60 °C

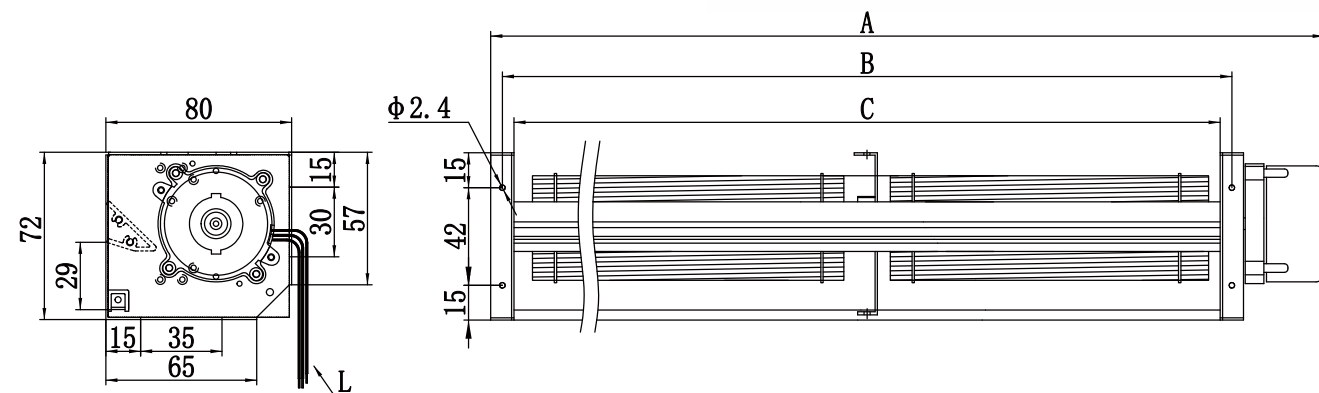


Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Current (A)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCD-45530MN-06	585	540	530	24	0.49	2000	28	277	44	Double
LWCD-45630MN-06	685	640	630	24	0.7	2000	28	329	45	Double
LWCD-45700MN-06	755	710	700	24	0.85	2000	28	365	46	Double
LWCD-45750MN-06	805	760	750	24	0.94	2000	28	392	46	Double
LWCD-45870MN-06	915	880	870	24	0.8	2000	26	454	47	Double

LWCD-50 Series

Product Characteristic

- Motor Type : 3 Phase BLDC Motor
- Housing Material : Steel+Aluminum Alloy
- Blade Material : Aluminum Alloy
- Insulation Class : B
- Bearing Type: Ball bearing
- Operation Temperature : - 25 °C ~ +60 °C

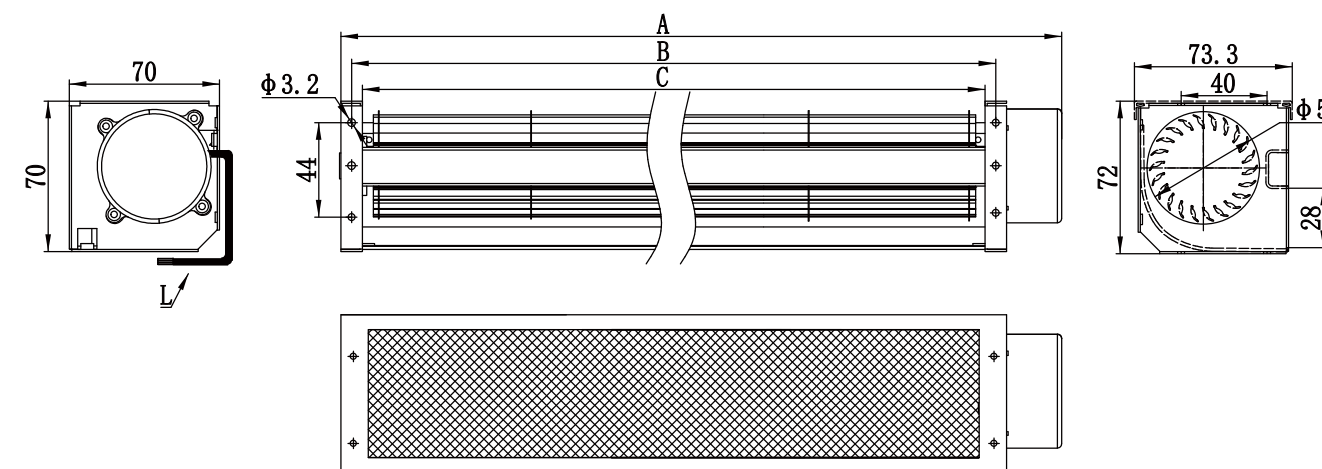

Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Current (A)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCD-5090LN-06	144	108	98	12	0.14	2000	40	54	37	Single
LWCD-5090MN-07	144	108	98	24	0.07	2000	40	54	37	Single
LWCD-50150LN-06	204	168	158	12	0.2	2000	38	88	37	Single
LWCD-50150MN-07	204	168	158	24	0.1	2000	38	88	37	Single
LWCD-50190LN-06	244	208	198	12	0.28	2000	36	110	38	Single
LWCD-50190MN-07	244	208	198	24	0.14	2000	36	110	38	Single
LWCD-50250LN-06	296	260	250	12	0.36	2000	34	139	39	Single
LWCD-50250MN-07	296	260	250	24	0.18	2000	34	139	39	Single
LWCD-50290LN-06	336	300	290	12	0.44	2000	30	161	40	Single
LWCD-50290MN-07	336	300	290	24	0.22	2000	30	161	40	Single
LWCD-50350LN-06	404	368	358	12	0.52	2000	26	198	41	Single
LWCD-50350MN-07	404	368	358	24	0.26	2000	26	198	41	Single
LWCD-50420LN-06	464	428	418	12	0.6	2000	20	232	42	Single
LWCD-50420MN-07	464	428	418	24	0.3	2000	20	232	42	Single