


LWCD-50 Series

Product Characteristic

- Motor Type : 3 Phase BLDC Motor
- Housing Material : Steel+Aluminum Alloy
- Blade Material : Aluminum Alloy
- Insulation Class : B
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃

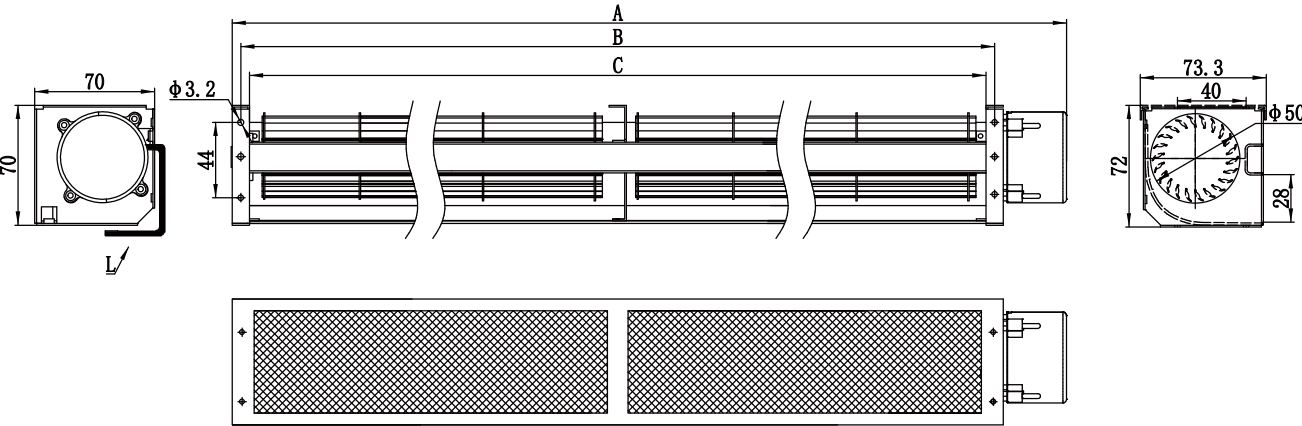


Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Current (A)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCD-50530MN-06	567	540	530	24	0.33	2000	21	288	43	Double
LWCD-50610MN-06	647	620	610	24	0.37	2000	19	332	42	Double
LWCD-50700MN-06	737	710	700	24	0.41	2000	20	381	43	Double

LWCD-60 Series

Product Characteristic

- Motor Type : 3 Phase BLDC Motor
- Housing Material : Steel+Aluminum Alloy
- Blade Material : Aluminum Alloy
- Insulation Class : B
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃

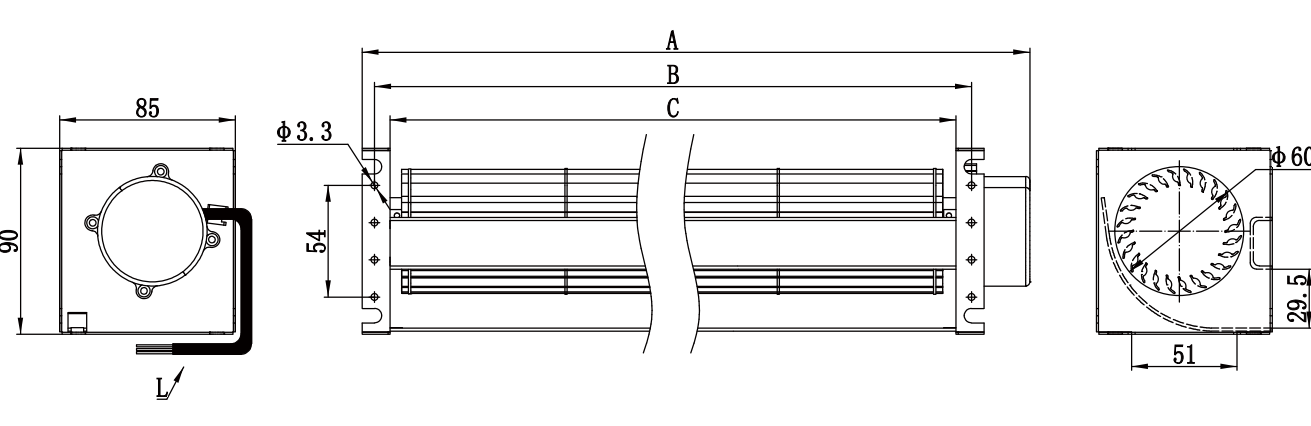

Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Current (A)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCD-60120LN-06	186	138	123	12	0.68	2000	27	102	38	Single
LWCD-60120MN-07	186	138	123	24	0.35	2000	27	102	38	Single
LWCD-60180LN-06	246	199	184	12	0.75	2000	29	152	38	Single
LWCD-60180MN-07	246	199	184	24	0.4	2000	29	152	38	Single
LWCD-60240LN-06	307	259	245	12	0.78	2000	32	203	39	Single
LWCD-60240MN-07	307	259	245	24	0.42	2000	32	203	39	Single
LWCD-60300LN-06	368	321	306	12	0.8	2000	34	207	41	Single
LWCD-60300MN-07	368	321	306	24	0.46	2000	34	207	41	Single
LWCD-60360LN-06	430	383	368	12	0.95	2000	34	240	42	Single
LWCD-60360MN-07	430	383	368	24	0.51	2000	34	240	42	Single
LWCD-60420LN-06	492	444	429	12	0.11	2000	35	355	43	Single
LWCD-60420MN-07	492	444	429	24	0.53	2000	35	355	43	Single