


LWCD-60 Series

Product Characteristic

- Motor Type : 3 Phase BLDC Motor
- Housing Material : Steel+Aluminum Alloy
- Blade Material : Aluminum Alloy
- Insulation Class : B
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃

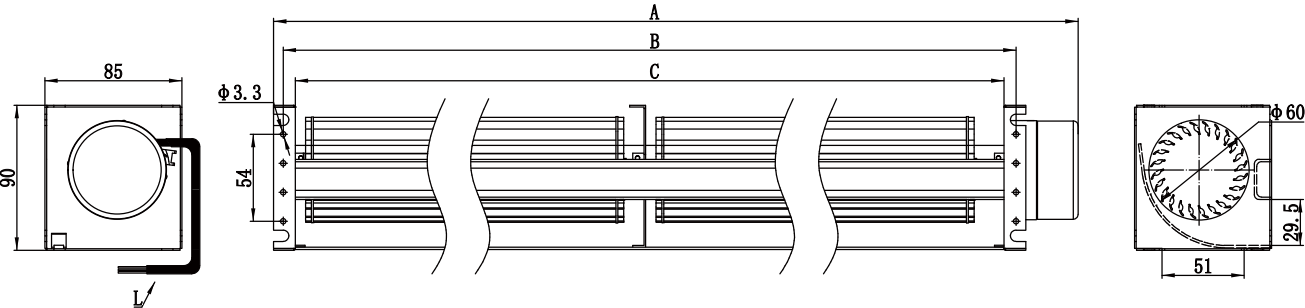


Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Current (A)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCD-60520MN-06	600	535	520	24	1.04	1800	28	414	45	Double
LWCD-60610MN-06	690	625	610	24	1.1	1800	29	486	46	Double
LWCD-60640MN-06	720	655	640	24	1.13	1800	29	510	47	Double
LWCD-60700MIN-06	780	715	700	24	1.17	1800	30	558	47	Double
LWCD-60750MN-06	830	765	750	24	1.2	1800	31	597	48	Double
LWCD-60870MN-06	950	885	870	24	1.25	1800	32	693	50	Double
LWCD-601100MN-06	1185	1120	1105	24	1.3	1800	34	857	51	Triple
LWCD-601300MN-06	1385	1320	1305	24	1.36	1800	35	1012	52	Triple

LWCD-65 Series

Product Characteristic

- Motor Type : 3 Phase BLDC Motor
- Housing Material : Steel+Aluminum Alloy
- Blade Material : Aluminum Alloy
- Insulation Class : B
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃

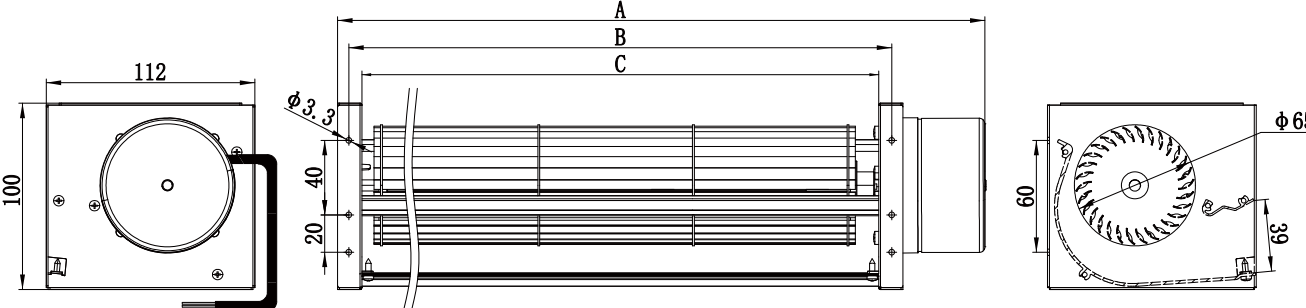

Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Current (A)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCD-65120LN-06	192	137	123	12	1.3	1800	40	143	47	Single
LWCD-65120MN-07	192	137	123	24	0.5	1800	40	143	47	Single
LWCD-65180LN-06	253	198	184	12	1.5	1800	41	214	47	Single
LWCD-65180MN-07	253	198	184	24	0.6	1800	41	214	47	Single
LWCD-65240LN-06	314	259	245	12	1.7	1800	42	286	48	Single
LWCD-65240MN-07	314	259	245	24	0.7	1800	42	286	48	Single
LWCD-65300LN-06	375	320	306	12	1.8	1800	42	357	49	Single
LWCD-65300MN-07	375	320	306	24	0.8	1800	42	357	49	Single
LWCD-65360LN-06	437	382	368	12	1.9	1800	43	429	50	Single
LWCD-65360MN-07	437	382	368	24	0.8	1800	43	429	50	Single
LWCD-65420LN-06	498	443	429	12	2	1800	44	500	52	Single
LWCD-65420MN-07	498	443	429	24	0.9	1800	44	500	52	Single
LWCD-65520MN-07	589	534	520	24	1.2	1800	52	606	53	Single
LWCD-65520LN-06	589	534	520	12	2.7	1800	52	606	53	Single
LWCD-65620MN-07	689	634	620	24	1.25	1800	53	722	53	Single
LWCD-65620LN-06	689	634	620	12	2.5	1800	53	722	53	Single