


LWCD-90 Series


Product Characteristic

- Motor Type : 3 Phase BLDC Motor
- Housing Material : Steel+Aluminum Alloy
- Blade Material : Aluminum Alloy
- Insulation Class : B
- Bearing Type: Ball bearing
- Operation Temperature : - 25 °C ~ +60 °C

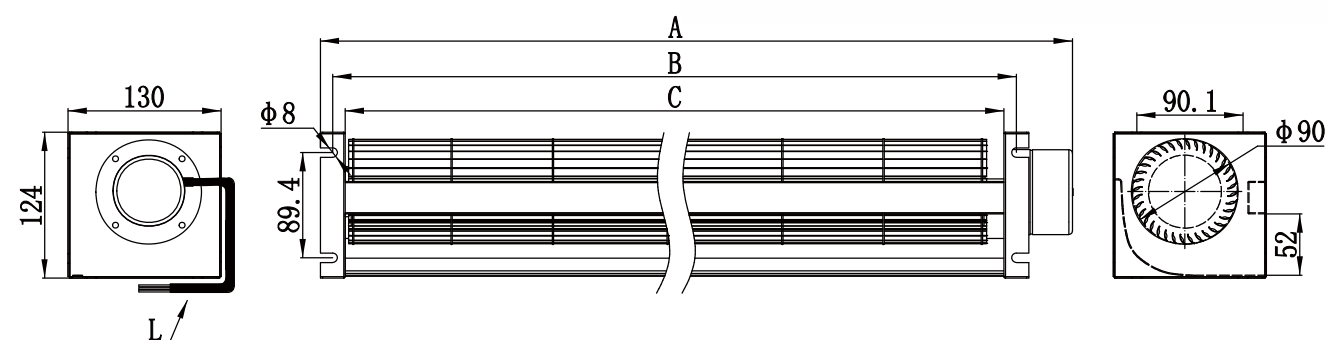

Technical Specifications


Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Power (W)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCD-90360MN-06	428	381	360	24	24.5	1500	70	607	54	Single
LWCD-90520MN-06	610	546	520	24	40	1500	102	876	56	Single
LWCD-90680MN-06	770	701	680	24	65	1500	130	1146	57	Single
LWCD-90800MN-06	890	821	800	24	80	1500	157	1348	58	Single
LWCD-90930MN-06	1028	951	930	24	96	1500	183	1567	59	Single

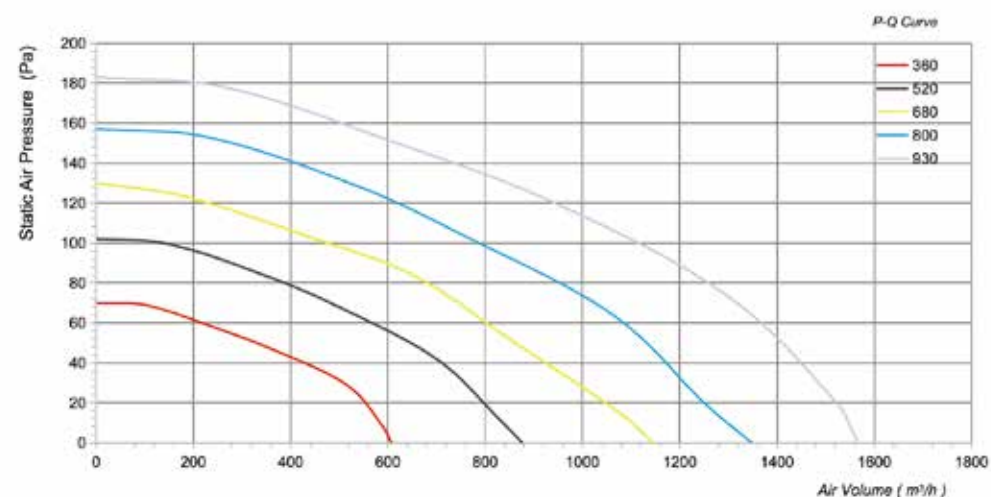

LWCD-100 Series

Product Characteristic

- Motor Type : 3 Phase BLDC Motor
- Housing Material : Steel+Aluminum Alloy
- Blade Material : Aluminum Alloy
- Insulation Class : B
- Bearing Type: Ball bearing
- Operation Temperature : - 25 °C ~ +60 °C

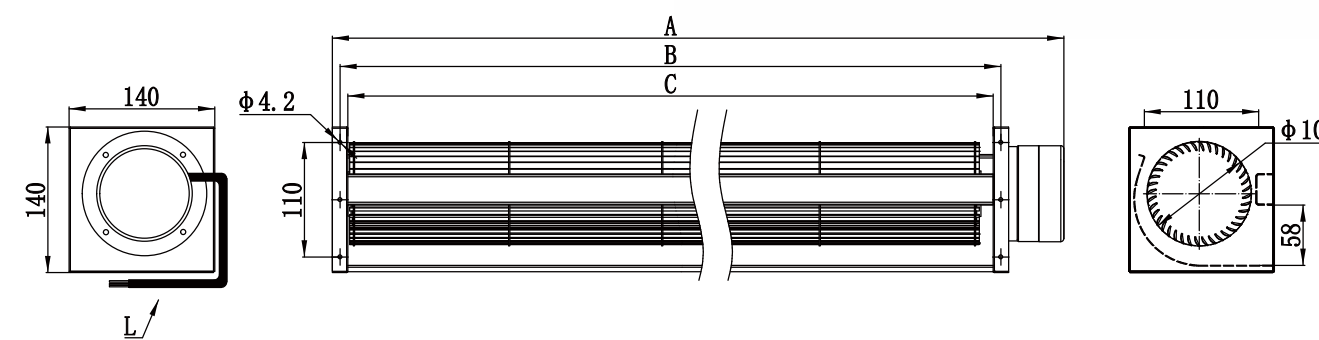

Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Power (W)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCD-100380MN-06	464	395	380	24	26.5	1500	106	800	55	Single
LWCD-100520MN-06	604	535	520	24	60	1500	145	1100	58	Single
LWCD-100620MN-06	704	635	620	24	75	1500	173	1300	59	Single
LWCD-100720MN-06	812	735	720	24	115.2	1500	197	1500	60	Single
LWCD-100820MN-06	912	835	820	24	120	1500	229	1700	61	Single

