


LWCE-100 Series


Product Characteristic

- Motor Type : EC External Rotor Motor
- Housing Material : Steel+Aluminum Alloy
- Blade Material : Aluminum Alloy
- Insulation Class : B
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃

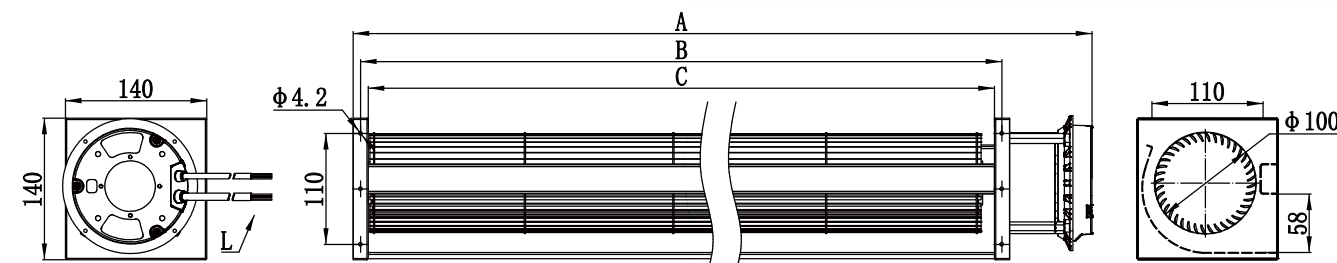

Technical Specifications


Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Frequency (Hz)	Power (W)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCE-100380SN-06	503	395	380	230	50/60	32	1500	106	800	55	Single
LWCE-100520SN-06	643	535	520	230	50/60	55	1500	145	1100	58	Single
LWCE-100620SN-06	739	635	620	230	50/60	70	1500	173	1300	59	Single
LWCE-100720SN-06	839	735	720	230	50/60	75	1500	201	1530	60	Single
LWCE-100820SN-06	939	835	820	230	50/60	80	1500	229	1735	61	Single

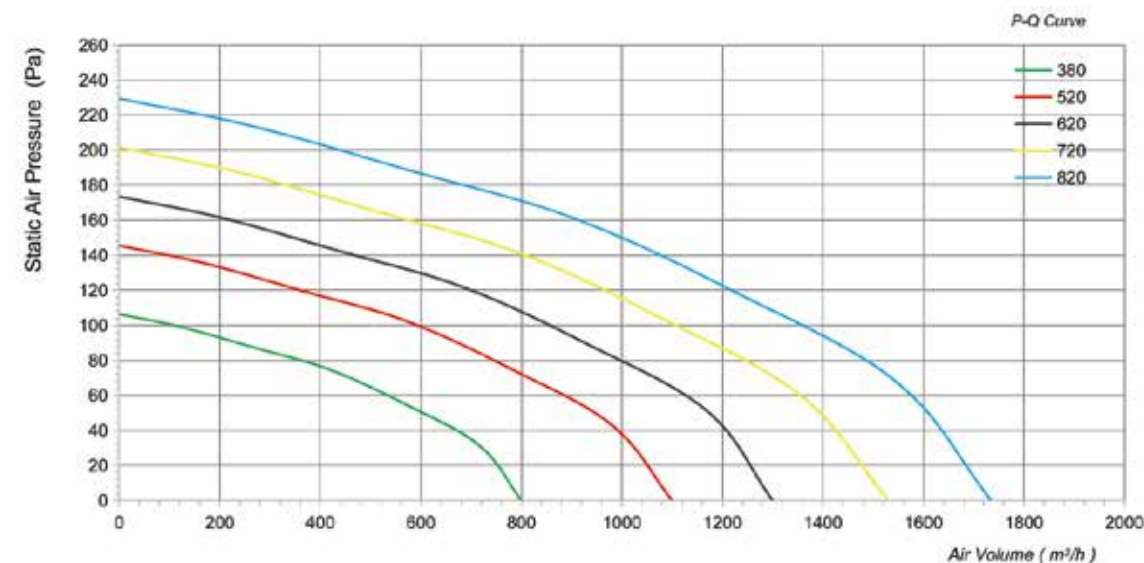

LWCE-110 Series

Product Characteristic

- Motor Type : EC External Rotor Motor
- Housing Material : Steel+Aluminum Alloy
- Blade Material : Aluminum Alloy
- Insulation Class : B
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃

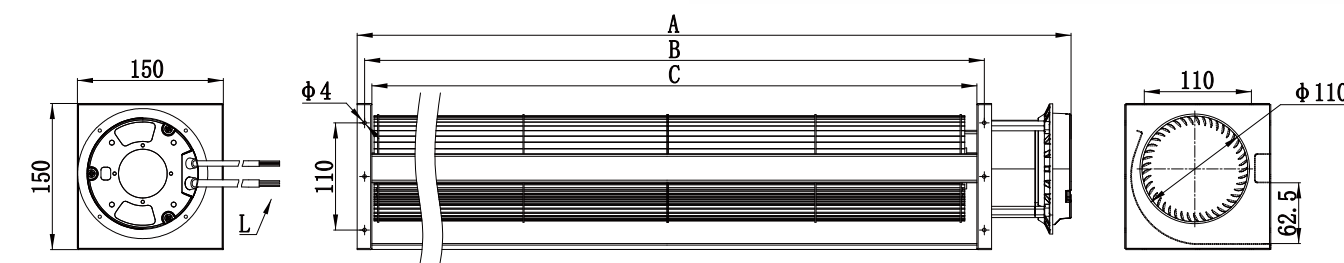

Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Frequency (Hz)	Power (W)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCE-110380SN-06	499	395	380	230	50/60	70	1200	123	800	61	Single
LWCE-110520SN-06	639	535	520	230	50/60	100	1200	168	1150	63	Single
LWCE-110620SN-06	739	635	620	230	50/60	120	1500	201	1350	66	Single
LWCE-110720SN-06	839	735	720	230	50/60	132	1500	223	1600	67	Single
LWCE-110820SN-06	975	835	820	230	50/60	146	1500	265	1750	68	Single

