


LWCE-120 Series


Product Characteristic

- Motor Type : EC External Rotor Motor
- Housing Material : Steel+Aluminum Alloy
- Blade Material : Aluminum Alloy
- Insulation Class : B
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃

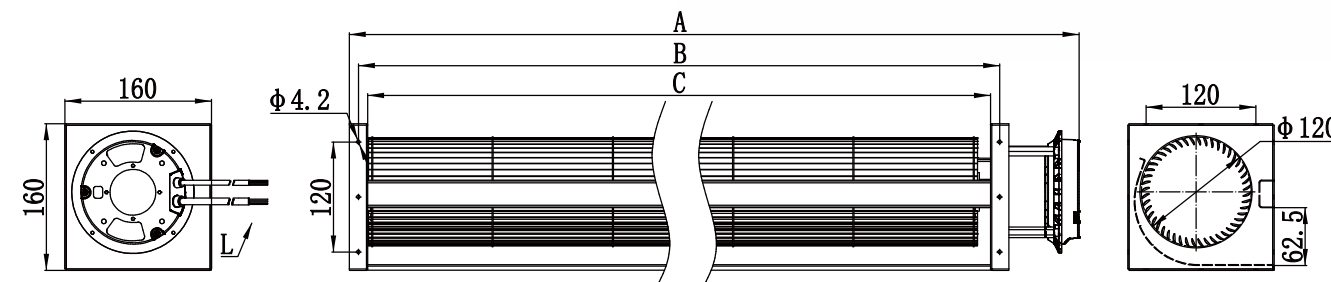

Technical Specifications


Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Frequency (Hz)	Power (W)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCE-120380SN-06	504	400	380	230	50/60	53	1350	68	900	63	Single
LWCE-120560SN-06	614	510	490	230	50/60	70	1350	102	1350	65	Single
LWCE-120680SN-06	684	580	560	230	50/60	80	1350	123	1600	67	Single
LWCE-120780SN-06	804	700	680	230	50/60	92	1350	141	1900	71	Single
LWCE-120900SN-06	940	800	780	230	50/60	105	1350	161	2100	72	Single

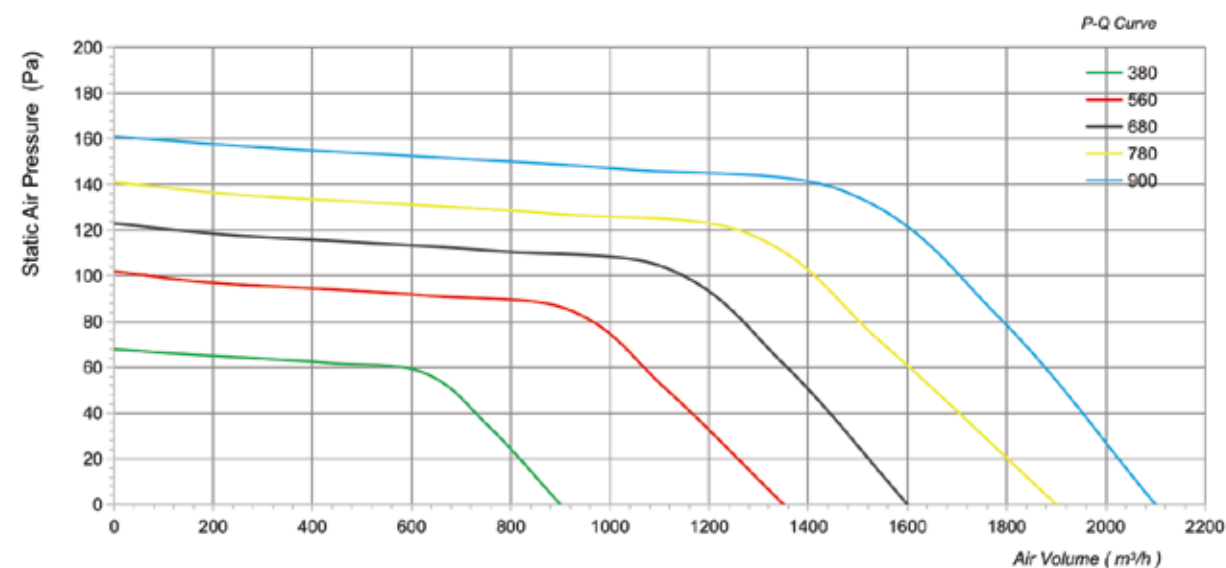

LWCE-150 Series

Product Characteristic

- Motor Type : EC External Rotor Motor
- Housing Material : Steel+Aluminum Alloy
- Blade Material : Aluminum Alloy
- Insulation Class : B
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃

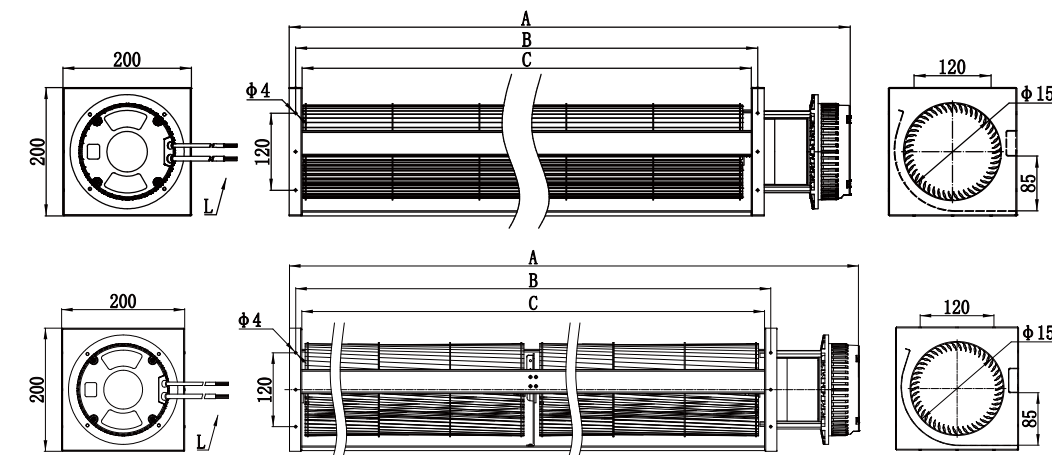

Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Frequency (Hz)	Power (W)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCE-150380SN-06	504	400	380	230	50/60	70	1100	62	1600	69	Single
LWCE-150500SN-06	624	520	500	230	50/60	145	1100	82	2150	70	Single
LWCE-150700SN-06	860	720	700	230	50/60	250	1000	104	2700	71	Single
LWCE-1501000SN-06	1160	1020	1000	230	50/60	350	800	119	3100	72	Double
LWCE-1501200SN-06	1360	1220	1200	230	50/60	450	800	143	3700	75	Double

