




Dimension

Unit:mm

Model	A	B	C	D	ΦE	F	G	H	ΦL
LWDA-100S-MBN-05	205	180	120	200	98	176	121	106	100
LWDA-100S-MBN-06	205	180	120	200	98	176	121	106	100
LWDA-100S-MBN-07	205	180	120	200	98	176	121	106	100
LWDA-150S-MBN-05	265	230	120	254	150	201	151	131	150
LWDA-150S-MBN-06	265	230	120	254	150	201	151	131	150
LWDA-150S-MBN-07	265	230	120	254	150	201	151	131	150
LWDA-200S-MBN-05	344	300	160	346	200	309	213	187	200
LWDA-200S-MBN-06	374	330	200	374	200	344	256	226	200
LWDA-200S-MBN-07	374	330	200	374	200	344	256	226	200
LWDA-250S-MBN-05	465	380	230	438	250	335	282	237	250

Outline Dimension

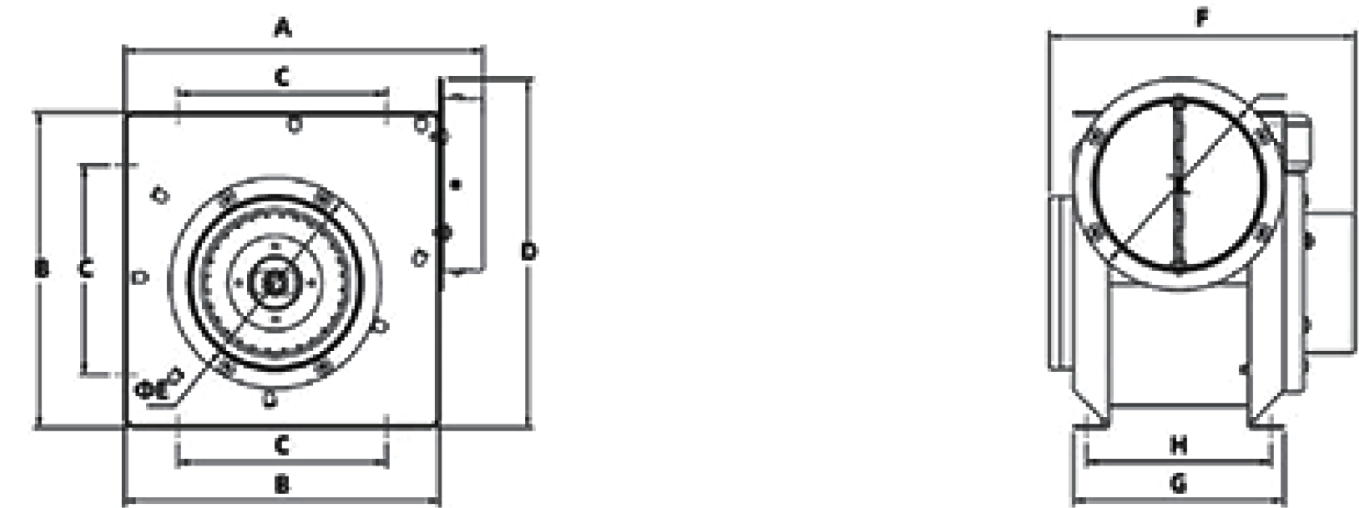

Technical Parameters

Model	Voltage (V)	Speed	Power (w)	Air Volume (m³/h)	Static pressure (Pa)	Noise [dB(A)]	N.W (kg)	Diameter (Φmm)	Curve
LWDA-100S-MBN-05	220/50	/	23	150	65	40	2.3	Φ100	A
LWDA-100S-MBN-06	220/50	/	23	150	60	38	2.3	Φ100	B
LWDA-100S-MBN-07	220/50	/	30	250	106	45	2.3	Φ100	C
LWDA-150S-MBN-05	220/50	H/L	33/28	380/280	125	125	3.5	Φ150	D/E
LWDA-150S-MBN-06	220/50	H/L	42/30	450/300	127	42	3.5	Φ150	F/G
LWDA-150S-MBN-07	220/50	H/L	85/65	600/500	170	46	3.5	Φ150	H/I
LWDA-200S-MBN-05	220/50	H/L	200/180	900/750	207	48	6.4	Φ200	J/K
LWDA-200S-MBN-06	220/50	H/L	230/215	1500/1350	220	52	9.2	Φ200	L/M
LWDA-200S-MBN-07	220/50	H/L	280/230	2100/1800	380	56	11.3	Φ200	N/O
LWDA-250S-MBN-05	220/50	H/L	250/200	2600/2300	410	59	16.2	Φ250	P/Q

Performance Curve

