


LWDA-200 Series




Product Characteristic

- Impeller Material: Plastic
- Mode Of Operation: S1
- Insulation Class: F
- Bearing: Maintenance-free ball bearings
- Protection: Blocked rotation, thermal protection, high and low pressure protection
- Supply Voltage: 230V,50/60Hz
- Protection Class: IP32
- Operation Temperature: -25 C ~ +60 C

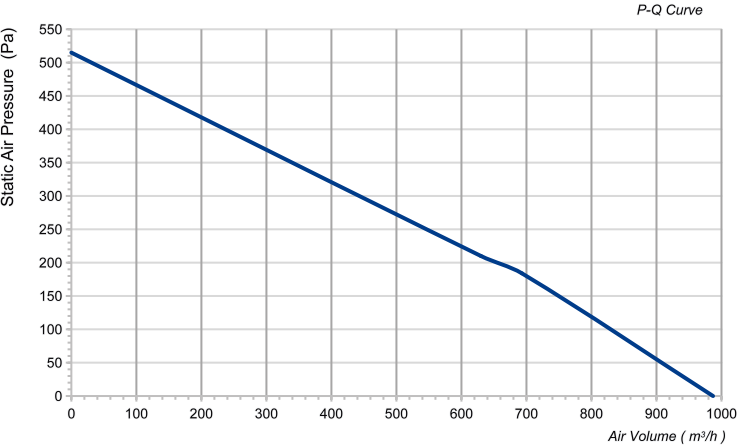


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Air Flow (m³/h)	Air Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWDA-200S-MBN-13	230	50	176	987	515	2540	70

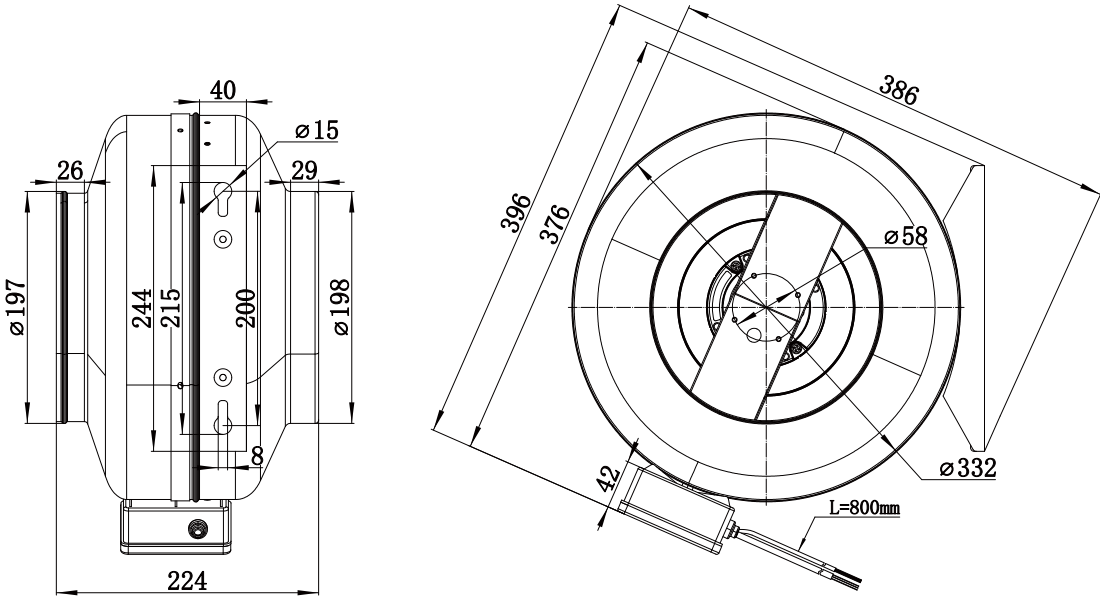

LWDA-250 Series

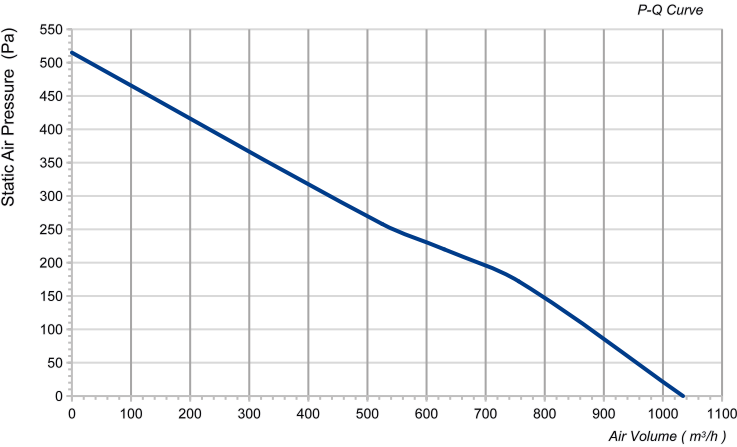

Product Characteristic

- Impeller Material: Plastic
- Mode Of Operation: S1
- Insulation Class: F
- Bearing: Maintenance-free ball bearings
- Protection: Blocked rotation, thermal protection, high and low pressure protection
- Supply Voltage: 230V,50/60Hz
- Protection Class: IP32
- Operation Temperature: -25 C ~ +60 C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Air Flow (m³/h)	Air Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWDA-250S-MBN-10	230	50	165	1034	515	2615	71

